



AC (MFRA型) 金属化塑胶膜电容

详细产品规格 - 请点击cn.100y.com.tw



RU/MPP-50uF/250VAC±10%




MFRA/MPP-15uF/250VAC±10%

规格:
 额定电压: 250V, 300V, 400V, 440V, 500V, 550V, 600V, 700V, 800V, 1000V.
 适用温度范围:
 -25°C~+125°C(耐热型电容器)
 特性:型小而量轻, 具有自愈机能, 价格较便宜, 有稳定的高周率特性和良好的温度特性。

| 额定电压 R. V. | 容许差 C. T. | 适用温度 A. T. | 损失 L. VAR |
|------------|-------------|--------------------|----------------------|
| 250VAC | +20% -5% | -25°C 85°C | MPP Under 0.1% |
| 1000VAC | ±5% ±10% | | |
| | +10% -5% | | |



BL/MPP-6uF/400VAC

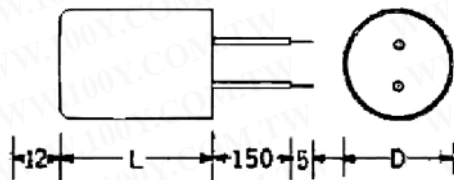


MPP-0.1uF/1000VAC±10%



| 100Y 编号 | 厂商编号 | 制造厂商 | 说明 | Hz | L*φDia. (mm) | 温度范围 | 误差值(±) | 电容量 | 额定电压 |
|---------|--------------------------|------|-------|-------|--------------|------------|---------------------------------|-------|------|
| 14655 | BL/MPP-6uF/400VAC | DJE | AC 电容 | 50/60 | 51*22 | 25°C~+70°C | -5%+10%(U), +/-10%(K), +/-5%(J) | 6uF | 400 |
| 4332 | MFRA/MPP-10uF/400VAC | DJE | AC 电容 | 50/60 | 60*35 | -25°C~85°C | ±10% | 10uF | 400 |
| 4425 | MFRA/MPP-15uF/250VAC±10% | DJE | AC 电容 | 50/60 | 60*30 | -25°C~85°C | ±10% | 15uF | 250 |
| 4323 | MFRA/MPP-1uF/400VAC±10% | DJE | AC 电容 | 50/60 | 40*25 | -25°C~85°C | ±10% | 1uF | 400 |
| 4404 | MFRA/MPP-20uF/250VAC±10% | DJE | AC 电容 | 50/60 | 60*35 | -25°C~85°C | ±10% | 20uF | 250 |
| 4424 | MFRA/MPP-22uF/350VAC±5% | DJE | AC 电容 | 50/60 | 60*40 | -25°C~85°C | ±5% | 22uF | 350 |
| 4333 | MFRA/MPP-22uF/400VAC±10% | DJE | AC 电容 | 50/60 | 60*45 | -25°C~85°C | ±10% | 22uF | 400 |
| 4402 | MFRA/MPP-25uF/250VAC±10% | DJE | AC 电容 | 50/60 | 60*35 | -25°C~85°C | ±10% | 25uF | 250 |
| 4330 | MFRA/MPP-2uF/500VAC±10% | DJE | AC 电容 | 50/60 | 40*25 | -25°C~85°C | ±10% | 2uF | 500 |
| 4334 | MFRA/MPP-33uF/400VAC±10% | DJE | AC 电容 | 50/60 | 120*40 | -25°C~85°C | ±10% | 33uF | 400 |
| 4335 | MFRA/MPP-47uF/400VAC±10% | DJE | AC 电容 | 50/60 | 120*50 | -25°C~85°C | ±10% | 47uF | 400 |
| 4331 | MFRA/MPP-5uF/400VAC±10% | DJE | AC 电容 | 50/60 | 60*35 | -25°C~85°C | ±10% | 5uF | 400 |
| 33576 | MPP-0.1uF/1000VAC±10% | DJE | AC 电容 | 50/60 | 25*40 | -25°C~70°C | ±10% | 0.1uF | 1000 |
| 11295 | RU/MPP-50uF/250VAC±10% | DJE | AC 电容 | 50/60 | 87*51 | 105°C | ±10% | 50uF | 250 |

AC (BXE型) 金属化塑料膜电容

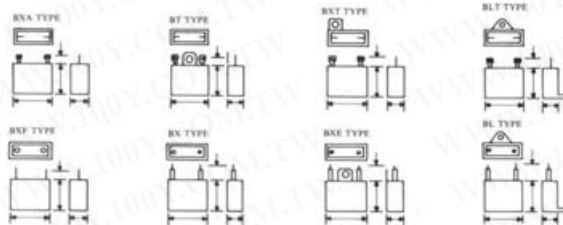

| 100Y 编号 | 厂商 | 制造厂商 | 说明 | L*W*H (mm) | 温度范围 | 误差值(±) | 电容量 | 额定电压 |
|---------|----------------------|------|-------|--------------|------------|--------|-------|--------|
| 4422 | BXE/MPP-1.5uF/250VAC | DJE | AC 电容 | 32*12.5*21.5 | 25°C~+70°C | ±10% | 1.5uF | 250VAC |
| 4416 | BXE/MPP-10uF/250VAC | DJE | AC 电容 | 51*22*32 | 25~+70°C | ±10% | 10uF | 250VAC |
| 4418 | BXE/MPP-1uF/250VAC | DJE | AC 电容 | 32*12.5*21.5 | 25°C~+70°C | ±10% | 1uF | 250VAC |
| 4421 | BXE/MPP-2.0uF/250VAC | DJE | AC 电容 | 32*13*23 | 25°C~+70°C | ±10% | 2.0uF | 250VAC |
| 4420 | BXE/MPP-2.2uF/250VAC | DJE | AC 电容 | 32*13*23 | 25°C~+70°C | ±10% | 2.2uF | 250VAC |
| 30148 | BXE/MPP-2.5uF/250VAC | DJE | AC 电容 | 32*13*23 | 25°C~+70°C | ±5% | 2.5uF | 250VAC |
| 4414 | BXE/MPP-20uF/250VAC | DJE | AC 电容 | 51*30*40 | 25°C~+70°C | ±10% | 20uF | 250VAC |
| 11656 | BXE/MPP-3.5uF/250V | DJE | AC 电容 | 32*14*24 | 25°C~+70°C | ±5% | 3.5uF | 250VAC |
| 4419 | BXE/MPP-4uF/300VAC | DJE | AC 电容 | 38*17*27 | 25°C~+70°C | ±5% | 4uF | 300VAC |
| 28324 | BXE/MPP-4uF/350VAC | DJE | AC 电容 | 39*22*32 | 25°C~+70°C | ±5% | 4uF | 350VAC |
| 4417 | BXE/MPP-5uF/250VAC | DJE | AC 电容 | 38*17*27 | 25°C~+70°C | ±10% | 5uF | 250VAC |
| 30117 | BXF/MPP-2uF/250VAC | DJE | AC 电容 | 32*13*23 | 25°C~+70°C | ±10% | 2uF | 250VAC |
| 29365 | BXF/MPP-5uF/250VAC | DJE | AC 电容 | 37*15*24 | 25°C~+70°C | ±10% | 5uF | 250VAC |

AC X2 滤波电容



详细产品规格 - 请点击cn.100y.com.tw



PMR-100nF/630VAC



PHE843MA6100MR17



PME271M647KR30



PHE840MZ7100MR06



PMR209ME6470M220R30

