






2. 54mm 插板式SOLT 母座 90

详细产品规格 - 请点击 cn.100y.com.tw



特性:
 额定电流: 3 AMP Max
 额定电压: 1000V AC R.M.S /min
 绝缘电阻: 5000MΩmin. At 1000V
 接触电阻: 30mΩmax.
 温度范围: -55℃~+105℃

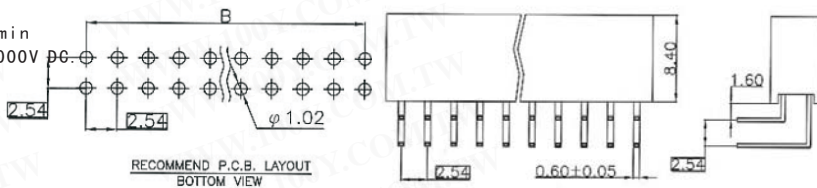


材料:
 Housing: PBT (UL 94V-0.)
 颜色: 黑色
 接触件材料: 磷青铜
 端子: 铜合金
 表面: 镀金 (t=0.40MM)

100Y 编号	厂商编号	说明	插脚
22495	B31-2	插板式 SOLT 90°	20*2P
22494	B53	插板式 SOLT 10°2pins	10*2pins


2. 54mm 压排式SOLT 母头



特性:
 额定电流: 3 A
 绝缘电阻: 5000MΩmin.
 接触电阻: 20mΩmax.
 温度范围: -45℃~+105℃
 接触材质: 磷青铜
 绝缘材质: P. B. T UL 94 V-0
 D02-60P

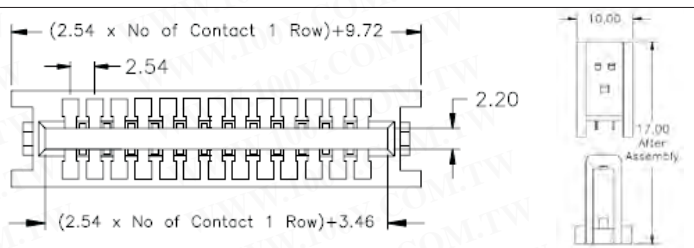


说明:
 温度范围: -55℃~+105℃
 额定电压: 1000Vrms at Sea Level
 绝缘电阻: >1x109Ω at 500VDC
 额定电流: 1 A

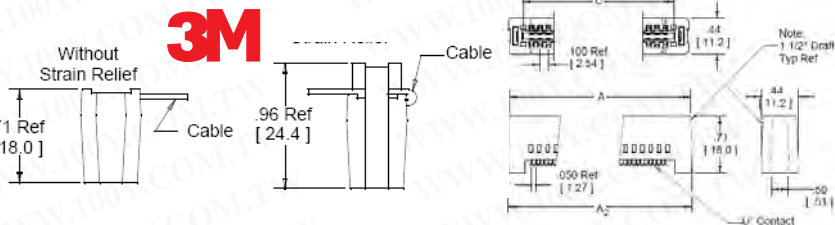

100Y 编号	厂商编号	制造厂商	说明	插脚
28926	3358-0001	3M	3M_压排母头/SLOT	10P
28927	3463-0001	3M	3M_压排母头/SLOT	34P
3811	D02-16P		压排母头/SLOT 16P	2*8P
4158	D02-20P		压排母头/SLOT 20P	2*10P
4163	D02-26P		压排母头/SLOT 26P	2*13P
4164	D02-34P		压排母头/SLOT 34P	2*17P
4165	D02-40P		压排母头/SLOT 40P	2*20P
4166	D02-50P		压排母头/SLOT 50P	2*25P
4167	D02-60P		压排母头/SLOT 60P	2*30P
2367	D02-62P		压排母头/SLOT 62P	2*31P

3. 96mm 焊接式 SOLT 母座


详细产品规格 - 请点击 cn.100y.com.tw



特性:
 Housing: 30%Glass filled PBT UL 94V-0
 接触件材料: 磷青铜
 额定电流: 5 AMP.
 绝缘电阻: 5000MΩmin. At 500V DC.
 接触电阻: 20mΩmax. At DC 100mA.
 温度范围: -55℃~+105℃

100Y 编号	厂商编号	说明	Contact Centers	Mounting Ears Yes/No	插脚
3757	B02-LW-S10A2G	焊线 SOLT2*10Pin 镀金	GOLD	Yes	20
4151	B03-LW-S12A2G	焊线 SOLT2*12Pin 镀金	GOLD	Yes	2*12
4152	B04-LW-S15A2G	焊线 SOLT2*15Pin 镀金	GOLD	Yes	30
4153	B05-LW-S18A2G	焊线 SOLT2*18Pin 镀金	GOLD	Yes	36
4154	B06-LW-S22A2G	焊线 SOLT2*22Pin 镀金	GOLD	Yes	44
4155	B07-LW-S28A2G	焊线 SOLT2*28Pin 镀金	GOLD	Yes	56
4156	B09-LW-S36A2G	焊线 SOLT2*36Pin 镀金	GOLD	Yes	72

PCI 连接座

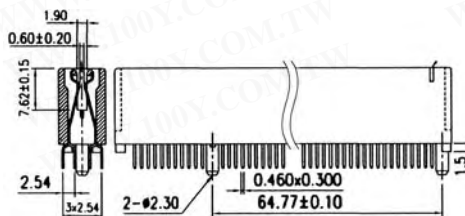

B47-4

B47 B57-5

