




额定电流: 1A  
 绝缘电阻: 1000MΩ Min at 500V DC  
 接触电阻:  
 10 MΩ Max  
 绝缘电压值:  
 500V AC for one minute  
 温度范围:  
 -40°C~+105°C

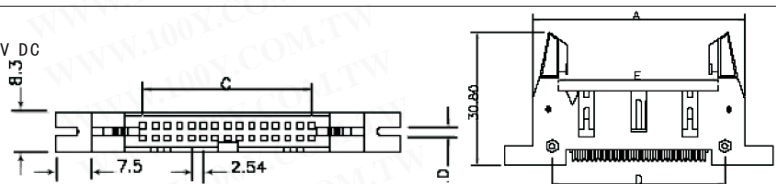

绝缘材料: Glass Filled Polyester (PBT)  
 绝缘电阻:  $>1 \times 10^9$  Ohms @ 500 Vdc  
 接口栅格: 100" x .100"  
 接口样式: 长方形插座  
 温度范围: -55°C~+105°C  
 额定电压: 1000 Vrms at Sea Level  
 额定电流: 1 A  
 绝缘材料颜色: 灰色  
 接触材料: 铜合金

Conductor Accommodation 26 & 28 AWG Solid or Stranded  
 Contact Under plating 100 μm [2.54 μm] Nickel  
 Contact Wiping Area Plating 30 μm [0.76 μm] Gold  
 Insulation Flammability Rating UL 94V-0  
 Mounting Option Mounting Flanges - Slotted  
 Polarization Military & Center Bump  
 Termination Method Insulation Displacement  
 Termination Style Multiple Wires




100Y 编号	厂商编号	制造厂商	说明	Contacts
16824	4234-0000LCSC/-0300	3M	压排公头 (附固定座)	34P
20298	4610-6050	3M	3M_ 压排线公头(附固定座)	10P
13969	D09-10P		IDC 压排牛角公头	64P
28759	D09-14P		简易压排公头 34P(附耳朵)	14P
28760	D09-16P		简易压排公头 34P(附耳朵)	16P
28761	D09-20P		简易压排公头 34P(附耳朵)	20P
28762	D09-26P		简易压排公头 34P(附耳朵)	26P
28763	D09-30P		简易压排公头 30P	30P
12062	D09-34P		简易压排公头 34P	34P
28764	D09-40P		简易压排公头 40P	40P
28765	D09-50P		简易压排公头 50P	50P
30379	D09-50PE		简易压排公头 50P(有定位孔)	50P
28766	D09-60P		简易压排公头 60P	60P
30378	D09-60PE		简易压排公头 60P(有定位孔)	60P
28767	D09-64P		简易压排公头 64P	64P
30377	D09-64PE		简易压排公头 64P(有定位孔)	64P
16595	FX-34P	3M	IDC 压排牛角公头	34P

## 2. 00mm 压排 IDC 母插头

详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)






额定电流: 1A  
 绝缘电阻: 5000MΩ Min at 500V DC  
 接触电阻: 20 MΩ Max at DC 100mA  
 温度范围: -55°C~+105°C

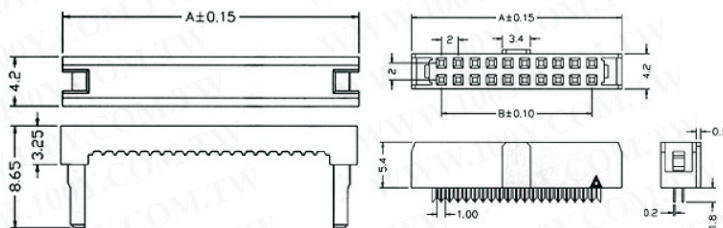

100Y 编号	厂商编号	说明	Contacts
12324	285-20-HIDS20SB1A1	牛角母座	20P
4858	285-34-HIDS34SB1A1	牛角母座	34P
4859	285-40-HIDS40SB1A1	牛角母座	40P
12373	285-44-HIDS44SB1A1	牛角母座	44P
4861	285-50-HIDS50SB1A1	牛角母座	50P
39737	D47-12P	牛角母座	12P
36915	D47-14P		
26544	D47-24P	牛角母座	24P
4857	D47-26P	牛角母座	26P
4862	D47-68P	牛角母座	68P

## 2. 00mm 180 简易含外壳IDC 公座

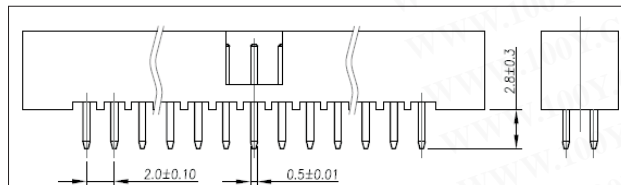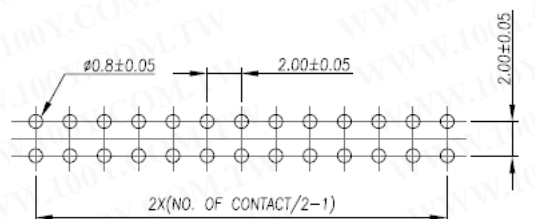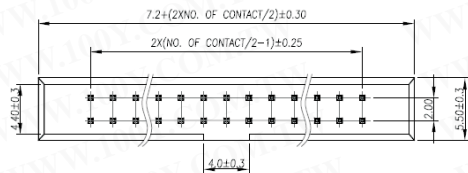

额定电流: 1A  
 绝缘电阻: 10000 MEGOHMS Min  
 温度范围: -40°C~+85°C  
 接触件材料: 黄铜0.5mm 平方

额定电压: 500 VAC (1 Min)  
 接触电阻: 30 MEGOHMS Min  
 绝缘材料: P. B. T & 30% G. F  
 镀层: 金

100Y 编号	厂商编号	说明	Contacts
37776	D62-40P	牛角公座	40P
16601	D62-44P	牛角公座	44P

