
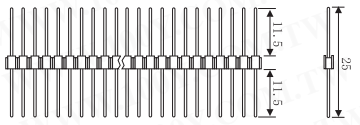



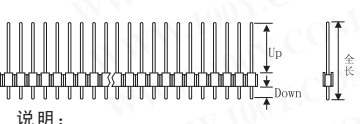
说明:
额定电流: 1A
绝缘电阻: 5000Ω Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

Material: D15-40A1S
Insulator: 30% Glass fiber PBT
Contact Pin: Brass


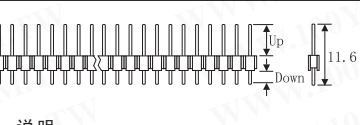
说明:
额定电流: 1A
绝缘电阻: 5000Ω Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

Material: PHS140GB1153
Insulator: NYLON 6T
Contact Pin: Brass


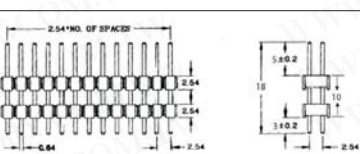
说明:
额定电流: 3A
额定电压: 800VAC (1 Min)
绝缘电阻: 1000Megohms Min
接触电阻: 30 Milliohms MAX
温度范围: -40℃~+85℃

Material: D15-40P/14.2MM
Insulator: P.B.T
Contact: Brass 0.64mm Square Pin Plated: Gold flash

说明:
额定电流: 3A
额定电压: 800VAC (1 Min)
绝缘电阻: 1000Megohms Min
接触电阻: 30 Milliohms MAX
温度范围: -40℃~+85℃

Material: 80-40
Insulator: P.B.T
Contact: Brass 0.64mm Square Pin Plated: Gold flash


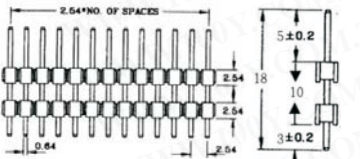
说明:
额定电流: 3 Amps
绝缘电阻: 5000 Megohms Min
接触电阻: 30 Milliohms MAX
介质耐电压: AC 500V
温度范围: -40 ~ +105℃
接触件材料: 黄铜
绝缘材料: 聚酯, UL 94V-0

Standard: PBT
Finish: Gold plated
Soldering Ability: 95% in 245℃+5℃


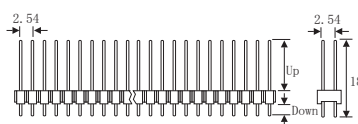
Material: PPHS1-88-40-122

100Y 编号	厂商编号	说明	Angle	Pins 1 *?	Up(mm)	Down(mm)	全长(mm)
7777	80-40	2.54mm 单排排针	180°	40*1	6	3.3	11.6mm
4737	D12-40P	2.54mm 单排排针	90°	1*40	3.0	3.3	9.54
1940	D15-40A1S	2.54mm 单排排针	180°	1*40	7.1	7.1	14.2
7778	D15-40P/14.2MM	2.54mm 单排排针	180°	1*40	8.6	3.3	14.2
3769	D15-40P/18MM	2.54mm 单排排针	180°	1*40	12.8	3.3	18.0
4686	D15-40P/18MM/等长	2.54mm 单排排针	180°	1*40	7.8	7.8	18
12323	PHS140GB1153	2.54mm 单排排针	180°	1*40	11.5	11.5	25
23894	PPHS1-88-40-122	2.54mm 单排排针	180°	1*40	5	3	18

2.54mm 双排排针


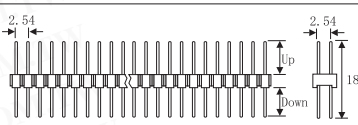



PPHS2-99-80-122


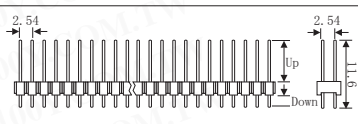
说明:
额定电流: 1A
绝缘电阻: 5000Ω Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

Material: D15-80P/18MM
Insulator: 30% Glass fiber PBT
Contact Pin: Brass
 plated: gold plated
 Tin plated


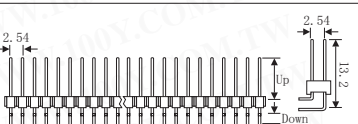
说明:
额定电流: 1A
绝缘电阻: 5000Ω Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

Material: D15-80P/18MM/等长
Insulator: 30% Glass fiber PBT
Contact Pin: Brass
 plated: gold plated
 Tin plated

说明:
额定电流: 1A
绝缘电阻: 5000Ω Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

D13-06P D13-12P D13-08P D13-80P
Material: Insulator: 30% Glass fiber PBT
Contact Pin: Brass


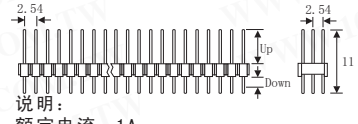
说明:
额定电流: 1A
绝缘电阻: 5000Ω Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

Material: D14-80P
Insulator: 30% Glass fiber PBT
Contact Pin: Brass
 plated: gold plated

100Y 编号	厂商编号	说明	Angle	Up(mm)	Pins 2 *?	Down(mm)	全长(mm)
28499	D13-06P	P:2.54mm 双排排针	180°	6	2*3	3.3	11.6
28084	D13-08P	P:2.54mm 双排排针	180°	6	2*4	3.3	11.6
28085	D13-12P	P:2.54mm 双排排针	180°	6	2*6		11.6
3823	D13-80P	P:2.54mm 双排排针	180°	6	2*40	3.3	11.6
7779	D14-80P	2.54mm 双排排针	90°	6	2*40	3.3	13.2
3473	D15-80P/18MM	2.54mm 双排排针	180°	12.8	40*2	3.3	18
11297	D15-80P/18MM/等长	2.54mm 双排排针	180°	7.8	40*2	7.8	18
23896	PPHS2-99-80-122	2.54mm 双排排针	180°	5	40*2	3	18

详细产品规格 - 请点击 cn.100y.com.tw

2.54mm 三排排针

说明:
额定电流: 1A
绝缘电阻: 5000Ω Min at DC 500V
接触电阻: 20 MΩ MAX at DC 100mA
温度范围: -55℃~+105℃

Material: PHS3-40*3-254-3-6
Insulator: 30% Glass fiber PBT
Contact Pin: Brass

100Y 编号	厂商编号	说明	Angle	Pins 3 *?	Up(mm)	Down(mm)	全长(mm)
11540	PHS3-40*3-254-3-6	2.54mm 三排排针	180°	40*3	6	3	11

