


1252P

特性:
 额定电流: 1 A AC, DC (AWG 26)
 额定电压: 250V AC/Min
 接触电阻: 20mΩmax.
 可适用的个人计算机板厚度: 0.8mm

电压规定值: 125V AC, DC
 绝缘电阻: 100MΩmin
 温度范围: -40℃~+85℃



1250S0503 1250S1203


特性:
 额定电流: 1 A AC, DC (AWG 26)
 额定电压: 250V AC/Min
 接触电阻: 20mΩmax.
 可适用的个人计算机板厚度: 0.8mm

电压规定值: 125V AC, DC
 绝缘电阻: 100MΩmin
 温度范围: -40℃~+85℃

100Y 编号	厂商编号	说明	Parking	Pins	公/母座/头	角度°	Pitch
25788	1250S0203	1250S Single Row Housing		2P	母头	180°	
25789	1250S0303	1250S Single Row Housing		3P	母头	180°	
25790	1250S0403	1250S Single Row Housing		4P	母头	180°	
25791	1250S0503	1250S Single Row Housing		5P	母头	180°	
25792	1250S0603	1250S Single Row Housing		6P	母头	180°	
25793	1250S0703	1250S Single Row Housing		7P	母头	180°	
25794	1250S0803	1250S Single Row Housing		8P	母头	180°	
25795	1250S0903	1250S Single Row Housing		9P	母头	180°	
23815	1250S1003	1250S Single Row Housing		10P	母头	180°	1.25mm
25796	1250S1103	1250S Single Row Housing		11P	母头	180°	
25797	1250S1203	1250S Single Row Housing		12P	母头	180°	
23816	1250S1503	1250S Single Row Housing		15P	母头	180°	1.25mm
21362	1252P0210T	1252P Right Angle SMT Header	1000Pcs/R	2P	公座	90°	1.25mm
21366	1252P0310T	1252P Right Angle SMT Header	1000Pcs/R	3P	公座	90°	1.25mm
21381	1252P0410T	1252P Right Angle SMT Header	1000Pcs/R	4P	公座	90°	1.25mm
21382	1252P0510T	1252P Right Angle SMT Header	1000Pcs/R	5P	公座	90°	1.25mm
21383	1252P0610T	1252P Right Angle SMT Header	1000Pcs/R	6P	公座	90°	1.25mm

详细产品规格 - 请点击cn.100y.com.tw


2050 系列 2.0mm 连接座/头和端子

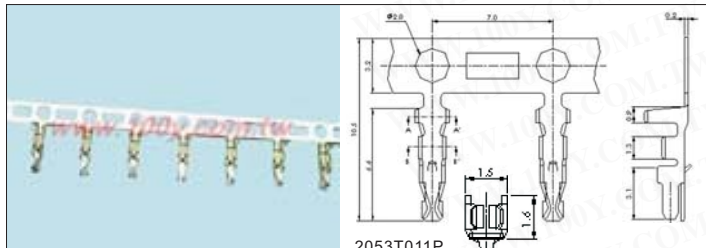


2053T011P

100Y 编号	厂商编号	说明	公/母座/头	角度°	Packing
23365	2053T011P	2053T Terminal	母针		10,000 pcs/R

详细产品规格 - 请点击cn.100y.com.tw

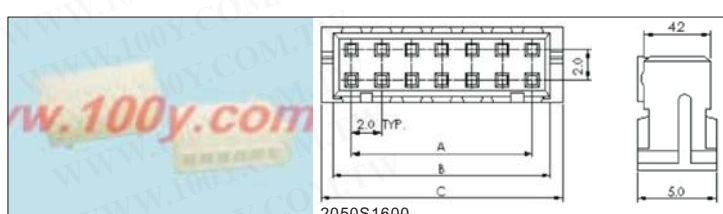



2050S1600

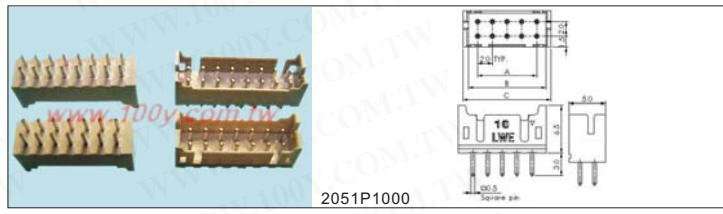

2051P1000

100Y 编号	厂商编号	说明	公/母座/头	角度°	Pins	Pitch
23444	2050S1000	2050S Housing	母头	180°	10P(2*5)	2.0mm
23364	2050S1200	2050S Housing	母头	180°	12P(2*6)	2.0mm
23449	2050S1400	2050S Housing	母头	180°	14P(2*7)	2.0mm
23450	2050S1600	2050S Housing	母头	180°	16P(2*8)	2.0mm
23451	2051P1000	2051P Straight Header	公座	180°	10P(2*5)	2.0mm
23452	2051P1200	2051P Straight Header	公座	180°	12P(2*6)	2.0mm
23455	2051P1400	2051P Straight Header	公座	180°	14P(2*7)	2.0mm
23456	2051P1600	2051P Straight Header	公座	180°	16P(2*8)	2.0mm

7015 系列 2.0mm 连接座/头和端子

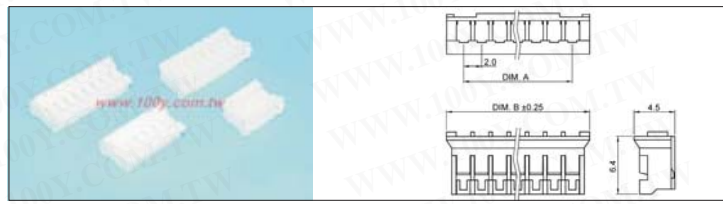F27

特性:
 额定电流: 2 A AC, DC (AWG 26)
 电压规定值: 250V AC, DC
 额定电压: 800V AC/Min
 绝缘电阻: 1000MΩmin
 接触电阻: Initial Value /10mΩmax.
 Alter environmental Testing /20mΩmax.
 温度范围: -25℃~+85℃
 可适用的个人计算机板厚度: 0.8~1.6mm

MATERIAL:
 Insulator: NYLON 66 UL 94V-0
 Post: Brass
 Plating: tin plated

100Y 编号	厂商编号	说明	Pitch	Pins	公/母座/头	角度°
4447	F27-02P	7015 Series Straight Header	2.0mm	2P	公座	180°
4448	F27-03P	7015 Series Straight Header	2.0mm	3P	公座	180°
4449	F27-04P	7015 Series Straight Header	2.0mm	4P	公座	180°
4450	F27-05P	7015 Series Straight Header	2.0mm	5P	公座	180°
4451	F27-06P	7015 Series Straight Header	2.0mm	6P	公座	180°
4753	F27-07P	7015 Series Straight Header	2.0mm	7P	公座	180°
4452	F27-08P	7015 Series Straight Header	2.0mm	8P	公座	180°
4454	F29-02P	7015 Series Housing	2.0mm	2P	母头	180°
4455	F29-03P	7015 Series Housing	2.0mm	3P	母头	180°
4456	F29-04P	7015 Series Housing	2.0mm	4P	母头	180°
4457	F29-05P	7015 Series Housing	2.0mm	5P	母头	180°
4458	F29-06P	7015 Series Housing	2.0mm	6P	母头	180°
4777	F29-07P	7015 Series Housing	2.0mm	7P	母头	180°
4459	F29-08P	7015 Series Housing	2.0mm	8P	母头	180°
23738	F29-10P	7015 Series Housing	2.0mm	10P	母头	180°
23739	F29-12P	7015 Series Housing	2.0mm	12P	母头	180°

详细产品规格 - 请点击cn.100y.com.tw

