
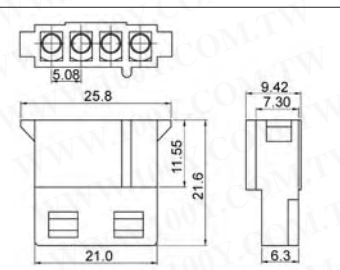


材料: Post: 黄铜, 锡/镀金 F53
Base: 尼龙 66, UL94V-2


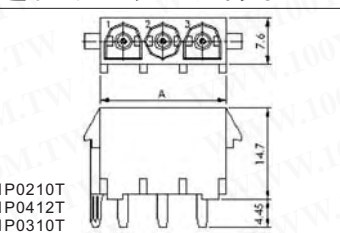



材料: nylon 66 UL94-2 F48
颜色: 白色

100Y 编号	厂商编号	说明	Pins	公/母	座/头	角度°
4614	F48 (P-7001-N2-W10400)	磁盘驱动器电源公头-大 4P	4P	公头		180
30157	F48-3P	磁盘驱动器电源公头-大 4P	3P	公头		180
4605	F53-04P	磁盘驱动器电源公座-大/ 插板	4P	公座		90°


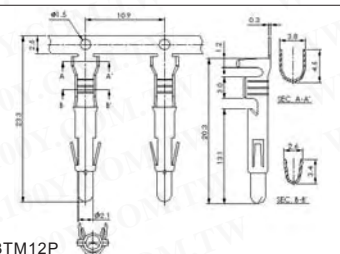
详细产品规格 - 请点击 cn.100y.com.tw

6350 系列 6.35mm 连接座/头和端子

6351P0210T
6351P0412T
6351P0310T


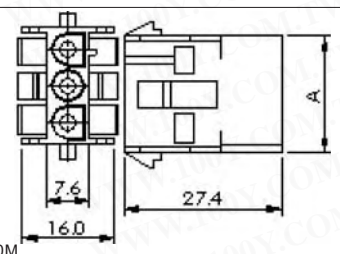
规格说明:
 额定电流: 10A AC, DC (AWG 14) 电压规定值: 600V AC, DC
 承受电压: 5000V AC/Minute 接触电阻: 10mΩ Max
 绝缘电阻: 1000 mΩ Min 温度范围: -55°C to +150°C

6353TM12P


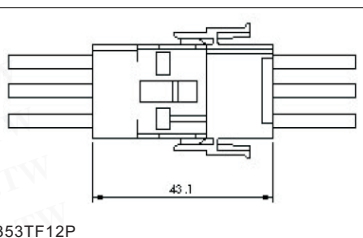
规格说明:
 额定电流: 10A AC, DC (AWG 14) 电压规定值: 600V AC, DC
 承受电压: 5000V AC/Minute 接触电阻: 10mΩ Max
 绝缘电阻: 1000 mΩ Min 温度范围: -55°C to +150°C

100Y 编号	厂商编号	说明	Pins	公/母	座/头	压接线径	角度	Pitch
22216	6351P0210T	6351P Straight Header	2P	公座			180	6.35mm
22217	6351P0310T	6351P Straight Header (6.35mm Pitch)	3P	公座			180	6.35mm
22218	6351P0412T	6351P Straight Header (6.35mm Pitch)	4P	公座			180	6.35mm
23367	6353TM12P	6353TM Terminal (Male)		公针		#14-18		


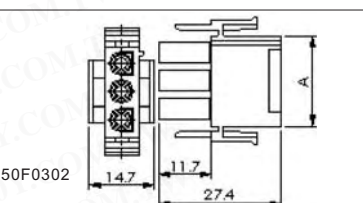
6350M

详细产品规格 - 请点击 cn.100y.com.tw

6353TF12P

规格说明:
 额定电流: 10A AC, DC (AWG 14) 额定电压: 600V AC, DC
 最大电压值: 5000V AC/Minute 接触电阻: 10mΩ Max.
 电阻阻力: 1000MΩ Min. 操作温度: -55°C to +105°C
 可适用PC 木板厚度: 1.6mm


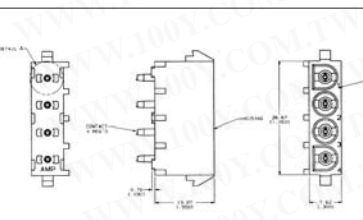



6350F0302

规格说明:
 额定电流: 10A AC, DC (AWG 14) 额定电压: 600V AC, DC
 最大电压值: 5000V AC/Minute 接触电阻: 10mΩ Max.
 电阻阻力: 1000MΩ Min. 操作温度: -55°C to +105°C
 可适用PC 木板厚度: 1.6mm


100Y 编号	厂商编号	说明	Packing	Pins	公/母	座/头	压接线径	角度°	Pitch
23464	6350F0202	6350F Housing		2P	公头			180°	6.35mm
23366	6350F0302	6350F Housing		3P	公头			180°	6.35mm
23465	6350F0402	6350F Housing		3P	公头			180°	6.35mm
23458	6350M0202	6350M Housing		2P	母头			180°	6.35mm
23459	6350M0302	6350M Housing		3P	母头			180°	6.35mm
23460	6350M0402	6350M Housing		4P	母头			180°	6.35mm
23463	6353TF12P	6353TM Terminal (Female)	4,000/R		母针		#14-18		

机板用电源公座, 母头和端子

AMP

特征:
 <CompactPCI: 否
 <中心线, Matrix (mm [in]): 6.35 [.250]
 <接触布局: 并排
 <安装: PCB插板式
 <主体材料: 尼龙
 <锁住类型: 正面锁
 <接触类型: 针
 <最大电流: 否
 <接触材料: 黄磷青铜
 <PCB极性: 无极性
 <PCB 厚度(mm [in]): 1.57 [0.062]
 <额定电流(安培.): 19

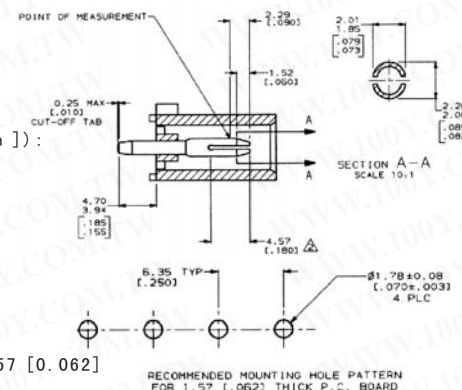

100Y 编号	厂商编号	制造厂商	说明	Pins	公/母	座/头	角度°
12308	0-350430-1	AMP	TEMP:105? MAX /600V MAX	4P	Male		180°
40117	350428-1	AMP	Soft ShellPin and Socket Connectors			Pre-tin	

详细产品规格 - 请点击 cn.100y.com.tw

