





插板式连接座



- Electrical Characteristics:** E26
- Contact Current Rating: 5 Amps
 - Dielectric Withstanding Voltage: AC 1250V, r.m.s.
 - Insulation Resistance: 5000MΩ Max. @ DC 500V
 - Contact Resistance: 5 Milliohms Max.
 - Operating Temperature: -55 deg. C to + 105 deg C


详细产品规格 - 请点击cn.100y.com.tw




- 说明:** E25
- 电流: 1A
 - 接触电阻: 25MΩ Max
 - 绝缘电阻: 1000MΩ Max At 500V DC
 - 介质耐电压: 1000V AC/Min
 - 温度范围: -55℃ to +105℃

100Y 编号	厂商编号	说明	Contacts	角度
4392	E25-24P	插板式公座	24P	90°
4393	E25-36P	插板式公座	36P	90°
4394	E25-50P	插板式公座	50P	90°
4391	E26-24P	插板式母座	24P	90°
4389	E26-36P	插板式母座	36P	90°
11138	E26-50P	插板式母座	50P	90°

压排线式公 / 母头




Product No.	A	B	C	D	E	100Y 编号	厂商编号	说明	Contacts
E27-24P	48.6	40.4	36.3	35.5	22.85	4385	E27-24P	C-Type 压排式公头	24P
E27-36P	61.6	53.4	49.2	50.8	36.72	4386	E27-36P	C-Type 压排式公头	36P
E27-50P	76.4	68.2	64.8	68.6	51.84	4387	E27-50P	C-Type 压排式公头	50P



Product No.	A	B	C	D	E	100Y 编号	厂商编号	说明	Contacts
E28-24P	51.7	46.8	35.6	35.6	23.76	4388	E28-24P	C-Type 压排式母头	24P
E28-36P	67.7	59.7	48.8	50.8	36.74	4046	E28-36P	C-Type 压排式母头	36P
E28-50P	82.8	74.9	64.3	68.6	51.84	4441	E28-50P	C-Type 压排式母头	50P


空中连接线和公插/母插

φ1.3 7008公插头/7007母插头系列+端子

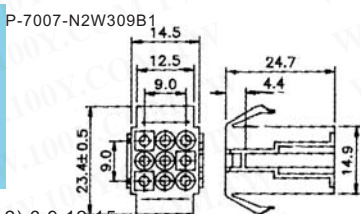


- No. of Circuits: 2,3,4(1x4)/(2x2),6,9,12,15
- Material: Nylon 66 UL 94V-2
- Contact Material: Brass
- Contact Finish: 60u" Tin Plated or select Gold Plating


详细产品规格 - 请点击cn.100y.com.tw

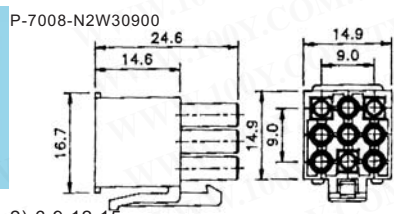

- No. of Circuits: 2,3,4(1x4)/(2x2),6,9,12,15
- Material: Nylon 66 UL 94V-2
- Contact Material: Brass
- Contact Finish: 60u" Tin Plated or select Gold Plating

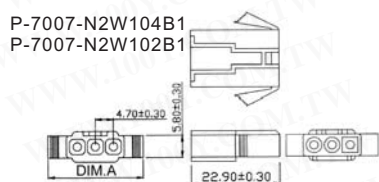

- TERMINAL**
- MATERIAL: 0.25T BRASS
 - PLATING: COPPER-UNDERCOATED, TIN-PLATED
 - WIRE RANGE: SUITABLE FOR AWG #16~26
- HOUSING MATERIAL: NYLON 66, UL 94V-0, V-2**
- PITCH: 4.5 (.177") CIRCUITS: 2, 3, 4, 6, 9, 12, 15
 - RECEPTACLE HOUSING MATES WITH PT 7007
 - PLUG HOUSING MATES WITH P17008

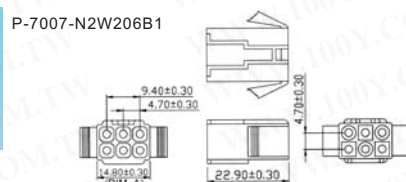

- TERMINAL**
- MATERIAL: 0.25T BRASS
 - PLATING: COPPER-UNDERCOATED, TIN-PLATED
 - WIRE RANGE: SUITABLE FOR AWG #16~26
- HOUSING MATERIAL: NYLON 66, UL 94V-0, V-2**
- PITCH: 4.5 (.177") CIRCUITS: 2, 3, 4, 6, 9, 12, 15
 - RECEPTACLE HOUSING MATES WITH PT 7007
 - PLUG HOUSING MATES WITH P17008

100Y 编号	厂商编号	说明	公/母 插头/端子	插脚	Pitch
12494	P-7007-N2W102B1	Nylon 66 UL94V-2	母插头	2P	4.5mm
12495	P-7007-N2W104B1	Nylon 66 UL94V-2	母插头	4P	4.5mm
12724	P-7007-N2W206B1	NYLON 66 UL94V-2	母插头	6P	4.5mm
16217	P-7007-N2W309B1	Nylon 66 UL94V-2	母插头	9P	4.5mm
16218	P-7008-N2W30900	Nylon 66 UL94V-2	公插头	9P	4.5mm

