



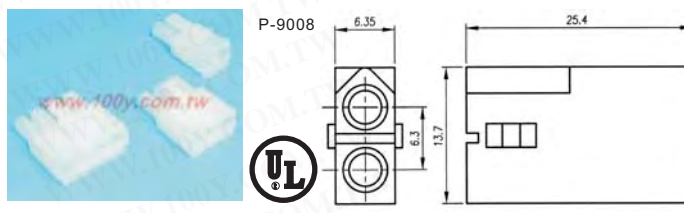

9007, 9008系列公头/母头和端子

详细产品规格 - 请点击cn.100y.com.tw

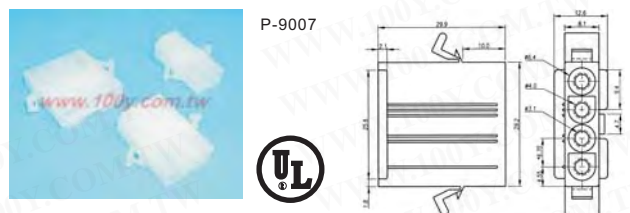

TERMINAL

- MATERIAL: 0.25T, BRASS
- WIRE RANGE: SUITABLE FOR AWG #16~#26

- PLATING: COPPER-UNDERCOATED, TIN-PLATED

HOUSING

- MATERIAL: NYLON 66, UL 94V-0, V-2
- CIRCUITS: 1,2,3,4,5,6,9,12, 15

- PITCH 9007P(R)H, 9008P(R)H: 5.03(.198")
- RECEPTACLE HOUSING MATES WITH PT 9007




You can rely on

- 9007-1P(R)H, 9008-1P(R)H: 6.7(.264")
- PLUG HOUSING MATES WITH PT 9008


100Y 编号	厂商编号	制造厂商	说明	插脚	公头/母头(座)	Pitch	接收端/YES	插入端/YES
14942	P-9007-N2W102B1		9007 Series 公头 2P 有耳	2P	公头	2.36	NO	YES
14943	P-9007-N2W103B1		9007 Series 公头 3P 有耳公头 2P 有耳公头 2P 有耳	3P	公头	2.36	NO	YES
14944	P-9007-N2W104B1		9007 Series 公头 4P 有耳公头 2P 有耳	4P	公头	2.36	NO	YES
14945	P-9008-N2W10200	KINGFONT	9008 Series 母头 2P 无耳	2P	母头	2.36	YES	NO
14946	P-9008-N2W10300	KINGFONT	9008 Series 母头 3P 无耳	3P	母头	2.36	YES	NO
14947	P-9008-N2W10400	KINGFONT	9008 Series 母头 4P 无耳	4P	母头	2.36	YES	NO

汽车排线-公插/母插


详细产品规格 - 请点击cn.100y.com.tw

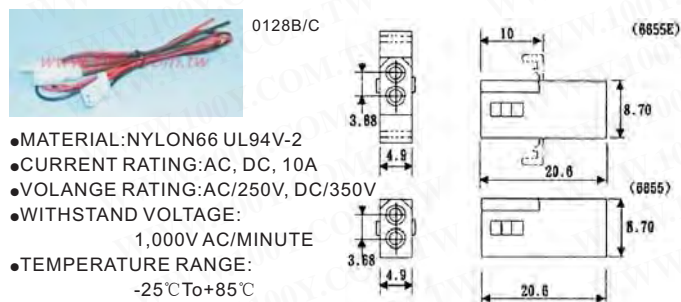


- MATERIAL: NYLON66 UL94V-2
- CURRENT RATING: AC, DC, 10A
- VOLANGE RATING: AC/250V, DC/350V
- WITHSTAND VOLTAGE: 1,000V AC/MINUTE
- TEMPERATURE RANGE: -25°C To +85°C

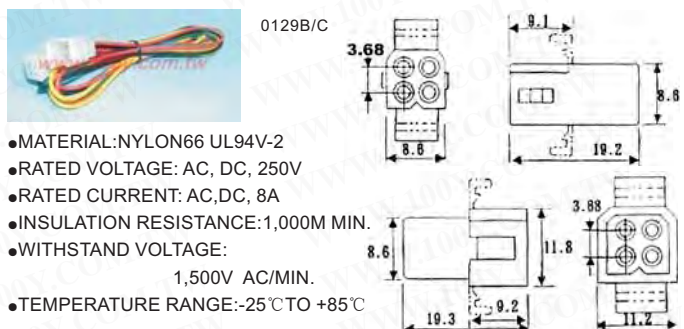

- MATERIAL: NYLON66 UL94V-2
- RATED VOLTAGE: AC, DC, 250V
- RATED CURRENT: AC, DC, 8A
- INSULATION RESISTANCE: 1,000M MIN.
- WITHSTAND VOLTAGE: 1,500V AC/MIN.
- TEMPERATURE RANGE: -25°C TO +85°C

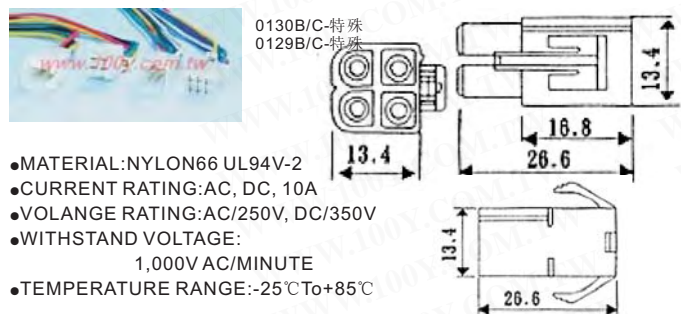


- MATERIAL: NYLON66 UL94V-2
- CURRENT RATING: AC, DC, 10A
- VOLANGE RATING: AC/250V, DC/350V
- WITHSTAND VOLTAGE: 1,000V AC/MINUTE
- TEMPERATURE RANGE: -25°C To +85°C

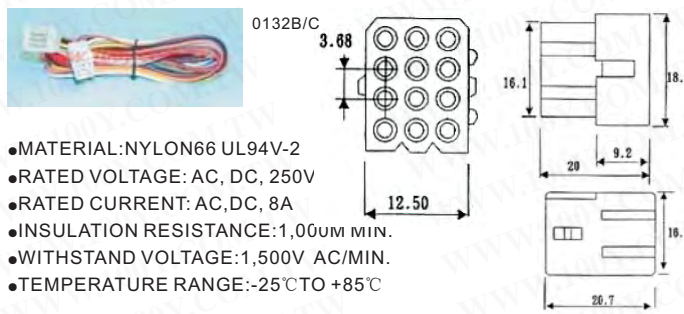

- MATERIAL: NYLON66 UL94V-2
- RATED VOLTAGE: AC, DC, 250V
- RATED CURRENT: AC, DC, 8A
- INSULATION RESISTANCE: 1,000M MIN.
- WITHSTAND VOLTAGE: 1,500V AC/MIN.
- TEMPERATURE RANGE: -25°C TO +85°C



- P9 POWER EXTENSION CABLES
- VERY HELPFUL WITH TOWER CASES.
- USED TO EXTEND THE POWER SUPPLY MOTHERBOARD CONNECTION.
- THIS IS THE P8/P9 AT TYPE.

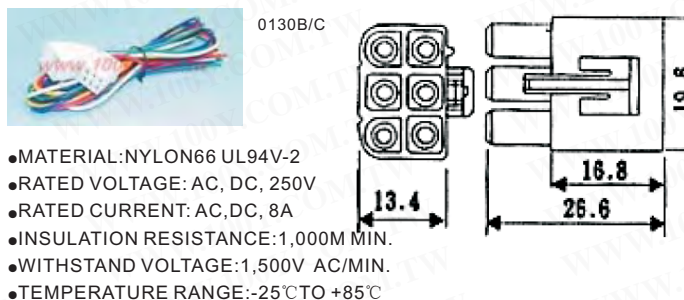

- MATERIAL: NYLON66 UL94V-2
- RATED VOLTAGE: AC, DC, 250V
- RATED CURRENT: AC, DC, 8A
- INSULATION RESISTANCE: 1,000M MIN.
- WITHSTAND VOLTAGE: 1,500V AC/MIN.
- TEMPERATURE RANGE: -25°C TO +85°C

100Y 编号	厂商编号	说明
7838	0128B/C	2P 汽车排线公插/母座
7839	0129B/C	4P 汽车排线公插/母座
15124	0129B/C-特殊	4P 汽车排线公插/母座 (外壳有勾)
6515	0130B/C	6P 汽车排线公/母插
15125	0130B/C-特殊	6P 汽车排线公插/母座 (外壳有勾)
11164	0131B/C	9P 汽车排线公/母插
10646	0132B/C	12P 汽车排线公插/母座

