




各式端子线

1. 2.5mm端子线




规格说明:

Current Rating: 1AAC,DC(AWG 26)
 Voltage Rating: 125V AC,DC
 Withstand Voltage: 250V AC/Minute
 Contact Resistance : 20mΩ Max.
 Insulation Resistance : 100MΩ Min.
 Temperature Range: -40℃ to +85℃
 Applicable PC Board Thickness: 0.8mm



详细产品规格 - 请点击 cn.100y.com.tw

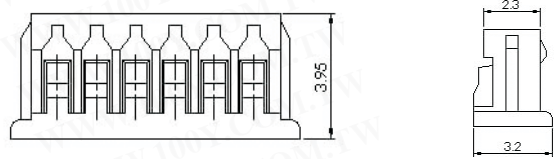

100Y 编号	厂商编号	说明	Pin
21373	M7201001	1.25mm 端子线 45CM	2P
21374	M7201002	1.25mm 端子线 45CM	3P
21375	M7201003	1.25mm 端子线 45CM	4P
21379	M7201004	1.25mm 端子线 45CM	5P
21380	M7201005	1.25mm 端子线 45CM	6P

2. 0mm端子线



I53-PH/E1-450
 2.0 母座附线连接器
 脚距: 2.0mm 耐压 : AC 250V
 耐电流: 0.5A (使用 AWG26# 1007 UL线材)
 Pin 数: 2P - 20P
 线 45cm 单头



F29 间距: 2.0mm 额定电流: 2A AC、DC
 额定电压: 250V AC、DC
 温度范围: -25℃ - +85℃
 耐压: 800V/min
 接触电阻: ≤0.01Ω 绝缘电阻: ≥1000MΩ
 适用电线: AWC30#-24#
 适用印制板厚度: 1.2-1.6mm

详细产品规格 - 请点击 cn.100y.com.tw

100Y 编号	厂商编号	说明	Pin
28086	F29-02P-10CM	双 7015 母头+端子线	2P
9142	F29-02P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	2P
7668	F29-03P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	3P
7677	F29-04P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	4P
9143	F29-05P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	5P
9266	F29-06P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	6P
7678	F29-07P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	7P
10628	F29-08P-450E	AWG26/45CM 7015 母头+端子线 P:2mm	8P
12422	I53-PH/E1-450	#26 2.0mm 端子线 45CM 单头	


2. 5mm端子线



M7201013
 规格说明:
 Current Rating: 3AAC,DC(AWG 22)
 Voltage Rating: 250V AC,DC
 Withstand Voltage: 1500V AC/Minute
 Contact Resistance : 10mΩ Max.
 Insulation Resistance : 500MΩ Min.
 Temperature Range: -25℃ to +85℃



M7201018
 规格说明:
 Current Rating: 3AAC,DC(AWG 22)
 Voltage Rating: 250V AC,DC
 Withstand Voltage: 1500V AC/Minute
 Contact Resistance : 10mΩ Max.
 Insulation Resistance : 500MΩ Min.
 Temperature Range: -25℃ to +85℃

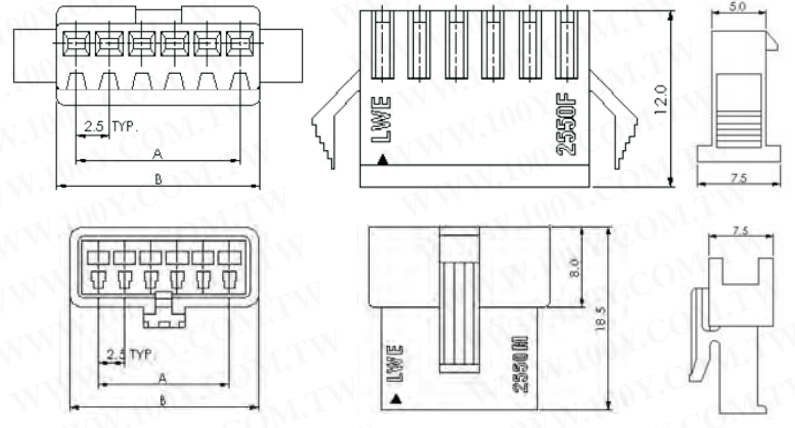

100Y 编号	厂商编号	说明	插脚
22207	M7201009	2550F0200 头 +45CM 线 2.5mm 端子线/2P	2P
22208	M7201010	2550F0200 头 +45CM 线 2.5mm 端子线/3P	3P
22209	M7201011	2550F0400 头 +45CM 线 2.5mm 端子线/4P	4P
22210	M7201012	2550F0500 头 +45CM 线 2.5mm 端子线/5P	5P
22211	M7201013	2550F0500 头 +45CM 线 2.5mm 端子线/6P	6P
23761	M7201014	2550M0200 头 +45CM 线 2.5mm 端子线/6P (22AWG)	2P
23882	M7201015	2550M0200 头 +45CM 线 2.5mm 端子线/6P (22AWG)	3P
23883	M7201016	2550M0200 头 +45CM 线 2.5mm 端子线/6P (22AWG)	4P
23884	M7201017	2550M0200 头 +45CM 线 2.5mm 端子线/6P (22AWG)	5P
23885	M7201018	2550M0200 头 +45CM 线 2.5mm 端子线/6P (22AWG)	6P

2. 54mm端子线



说明:
 间距: 2.54mm 线数: 1-12
 适用线规: AWC28#-22#
 适应基板厚度: 1.6mm
 温度范围: -25℃ - +85℃
 额定电压: 250V AC、DC 额定电流: 3A AC、DC
 接触电阻: ≤0.01Ω 绝缘电阻: ≥1000MΩ
 耐压: 1000V/min, AC/minute

100Y 编号	厂商编号	说明	Pin	Parking
35132	F03-10P-250E*2	#26 2.54mm 25cm 双头端子线	10P	
15916	F03-12P-400E*2	#26 2.54mm 40cm 双头端子线	12P	
14447	F11-03P-450D*2	#24 XH 3P 45CM 双头	3P	
14448	F11-07P-450D*2	#24 XH 7P 45CM 双头	7P	
23283	F11-12P-450D	AWG24/45CM 9001 母头+端子线	12P	
23653	F11-12P-450D*2	#24 XH 2P 45CM 双头	12P	
14449	F11-16P-450D*2	#24 XH 16P 45CM 双头	16P	
39126	P0924-BF06/XHD01	AWG24/12CM 9001 母头+端子线	6P	
14925	P111-百/B	2.0 10P 穿 8P/2.54 绞线	#26 2.54 8P/JAE2.0 10P	2.54mm 端子线

