USB / IEEE 1394连接头/座
USB 连接座(头)

详细产品规格－请点击cn.100y.com.tw

USBBS-00401W003-G

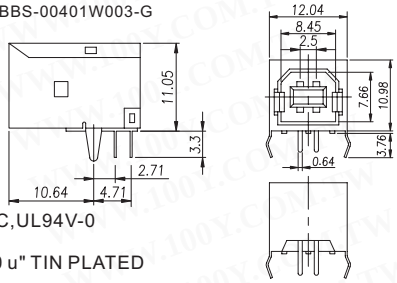

MATERIAL:
- HOUSING:THERMOPLASTIC,UL94V-0
- CONTACT:COPPER ALLOY
- SHELL:COPPER ALLOY, 100 u" TIN PLATED

SPECIFICATION:
- VOTAGE:30 VAC(R.M.S)
- CURRENT :1.0 A MAX. PER PIN
- TEMPERATURE:-55℃~+85℃
- CONTACT RESISTANCE:30 MILLIOHMS MAX.
- INSULATION RESISTANCE:1,000 MEGOHMS MIN.
- DIELECTRIC WITHANDING VOLTAGE:500 VAC

USBAS-00401W003

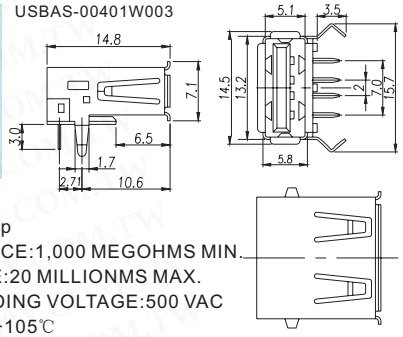

SPECIFICATION:
- CURRENT RATING:1Amp
- INSULATION RESISTANCE:1,000 MEGOHMS MIN.
- CONTACT RESISTANCE:20 MILLIONMS MAX.
- DIELECTRIC WITHTANDING VOLTAGE:500 VAC
- TEMPERATRUE:-40℃~+105℃

MATERIAL:
- HOUSING:THERMOPLASTIC,UL94V-0 STANDARD NULON 66
- CONTACT:PHOSPHOR BRONZE

USBAS-00401B012

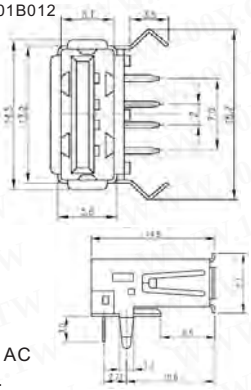

MATERIAL:
- Housing: thermoplastic, UL94V-0 Standard nylon 66
- Contact :phosphor bronze

SPECIFICATION:
- Current rating : 1Amp
- Insulation Resistance : 100MΩ Min.
- Contact Resistance : 20mΩ Max.
- Dielectric Withstanding Voltage : 500V AC
- Temperature Range : -40°C to+105°C.

CA-0306-03

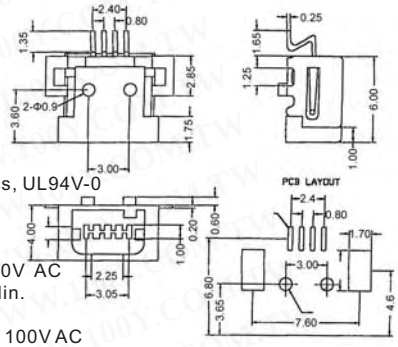

HOUSING :
High Temperature Thermoplastics, UL94V-0
Color : Black
Contact : Copper Alloy
Shell : Copper Alloy
Voltage Current Rating : 1AMP. 30V AC
Insulation Resistance : 100MΩ Min.
Contact Resistance : 50mΩ Max.
Dielectric Withstanding Voltage : 100V AC
Temperature Range : -50°C to+85°C.

USB SERIES A USA-04

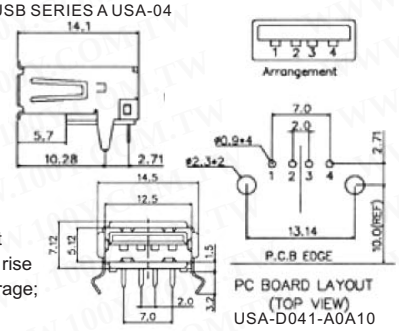

说明:
Voltage:30V AC(rms)
Current :1A maxium per contact
not to exceed30℃ temperature rise
Temperature :-40℃ to 60℃ storage;
0℃ to 40℃ operating

PC BOARD LAYOUT
(TOP VIEW)
USA-D041-A0A10

KS-002K-A1-N-W

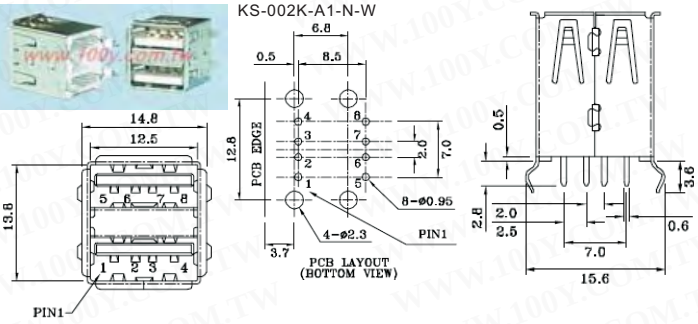



KS-001MD-A-N-B

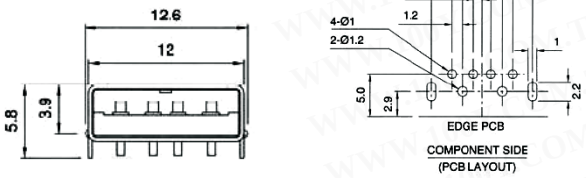

CA-0305-00

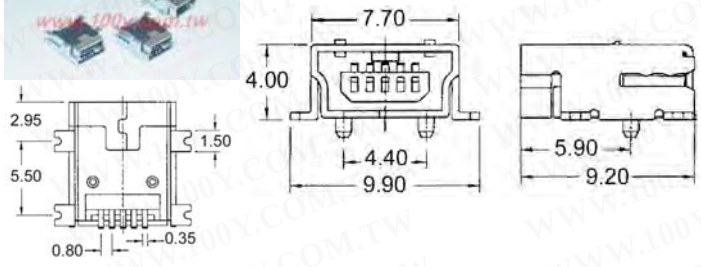

UB-23

USB-ADP-AF/AF

USB A Type Female to A Type Female Adapter
USB ADAPTER for USB A Type Female to A Type Female

KS-001-ANW

100Y 编号	厂商编号	制造厂商	说明
13966	CA-0305-00		Mini USB 5PIN Socket
13964	CA-0306-03		Mini USB 4PIN Socket SU" SMT
28166	KS-001-ANW		USB Jack DIP 90° 4P 母
18931	KS-001MD-A-N-B		USB Jack (DIP)
18932	KS-002K-A1-N-W		USB Jack DIP (180°) 双层
28099	UB-23	SCE	USB 转接头 A 母-A 母
22041	USB SERIES A USA-04		USB-A SMT 04P/ 2.0
17582	USB-ADP-AF/AF		USB 转换头(A 母/A 母)
16916	USBAS-00401B012		USB CONNECTOR SERIES
2353	USBAS-00401W003		USB CONN 4P A 型
39295	USBBS-00401W003-G		USB CONN 4P B 型-RoHS

服务专线:台湾:886-3-5753170 深圳:86-755-83298787 上海:86-21-34970699
传 真:台湾:886-3-5753172 深圳:86-755-83640655 上海:86-21-64605107
E-mail:台湾:sale@100y.com.tw 深圳:100y@163.com 上海:100y-1@163.com