







IEEE 1394 连接座(头)

详细产品规格 - 请点击 cn.100y.com.tw







312-SO4CR2

说明:
 Voltage:5.0V Current:0.5A
 Contact Resistance:Terminal-50MΩ Max
 Shell-50MΩ Max
 Temperature:-25°Cto85°C



IEECR-00603B003

MATERIAL:
 ●SHELL:COPPER ALLOY.
ELECTRICAL CHARACTERISTICS:
 ●CURRENT RATING:1 AMP.
 ●CONTACT RESISTANCE:20 MILLIOHMS MAX.



●HOUSING:THERMOPLASTIC UL94V-0 RATED.

●CONTACT:BRONZE.



●INSULATION RESISTANCE:1000 MEGOHMS MIN.
 ●DIELECTRIC WITHSTANDING:AC 500V FOR 1 MINUTES.

500V DC FOR 1MINUTES.
 ●OPERATING TEMPERATURE:-40°C TO +105°C

100Y 编号	厂商编号	说明
13965	312-SO4CR2	IEEE 1394 4PIN Socket SMT SMT
12082	IEECR-00603B003	IEEE-1394 DIP 6P 30u" GOLD PLATING


FPC/FFC连接座/线

FPC/FFC SMT90


上接式连接头



FPCTF-T50T1B000

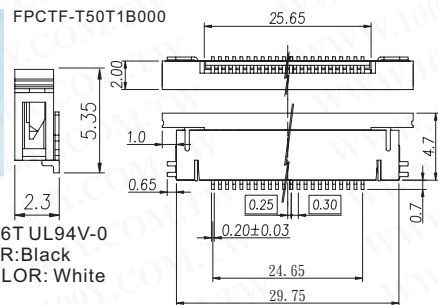

FPCTF-T26T1W000

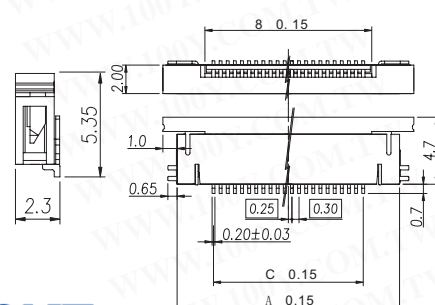

Specifications

Material & Finish

- Housing Material: Nylon 6T UL94V-0
- COLOR:Black
- Slider: PPA UL94V-0/COLOR: White

Electrical Performance:

- Rated current: 0.5A
- Rated voltage: 50 VDC
- Contact Resistance: 30Ω max.
- Insulation Resistance: 100MΩ min.
- Dielectric Withstanding Voltage: AC 250V/60sec.
- Operating Temperature: -30 to +85



100Y 编号	厂商编号	制造厂商	说明	Type	Contacts	Pitch (mm)
29220	FPCTF-T16T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	16P-上接	0.5
29221	FPCTF-T20T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	20P-上接	0.5
29222	FPCTF-T24T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	24P-上接	0.5
18805	FPCTF-T26T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	26P-上接	0.5
29223	FPCTF-T30T1W000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	30P-上接	0.5
12855	FPCTF-T50T1B000	KINGFONT	0.5mm Pitch ZIF Mode Horizontal Type Top Entry	SMT 90°	50P-上接	0.5

FPC/FFC SMT90




下接式连接头

详细产品规格 - 请点击 cn.100y.com.tw



FPCTF-B30T1B000

- Rated current: 0.5A
- Rated voltage: 50 VDC
- Contact Resistance: 30MΩ max. (at 20mVDC, 100mA max.)
- Insulation Resistance: 100MΩ min. (at 500 VDC)
- Dielectric Withstanding Voltage: AC 250V / 60sec. (Leak current must be 1mA max.)
- Operating Temperature: -30°C to +85°C

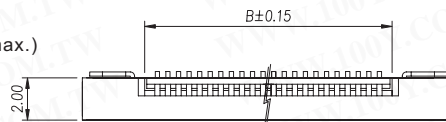

100Y 编号	厂商编号	说明	类型	Contacts	Pitch (mm)
12726	FPCTF-B16T1B000	FPC ZIF SMT 90° 下接式连接头	SMT 90度	16P-下接	0.5mm
12732	FPCTF-B20T1W000	FPC ZIF SMT 90° 下接式连接头	SMT 90度	20P-下接	0.5mm
12731	FPCTF-B24T1B000	FPC ZIF SMT 90° 下接式连接头	SMT 90度	24P-下接	0.5mm
12733	FPCTF-B26T1W000	FPC ZIF SMT 90° 下接式连接头	SMT 90°	26P-下接	0.5mm
12544	FPCTF-B30T1B000	FPC ZIF SMT 90° 下接式连接头	SMT 90°	30P-下接	0.5
22559	FPCTF-B33T1W000	FPC ZIF SMT 90° 下接式连接头	SMT 90°	33P-下接	0.5
12854	FPCTF-B50T1B000	FPC ZIF SMT 90° 下接式连接头	SMT 90°	50P-下接	0.5

