



4mm 香蕉插头/座


详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)




TL-8125 TL-8126

- 说明:**
- 颜色: Red, Black, (Blue, Yellow, Green)
  - 电流: 10A
  - 绝缘电阻: DC500V 100MΩ
  - 承受电压: AC 1500V 1 minute
  - 温度范围: -20°C ~ +80°C

- Material:**
- Handle: ABS.
  - Plug: nickel plated heat treated beryllium copper.
  - EFits O.D. less 5mm wire by soldering.
  - EFits 4mm standard banana socket.

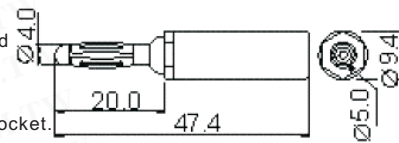

R8-27A-R

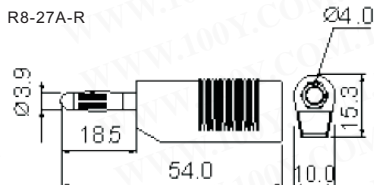

- 说明:**
- 颜色: Red, Black, (Blue, Yellow, Green)
  - 电流: 10A
  - 绝缘电阻: DC500V 100MΩ
  - 承受电压: AC 1500V 1 minute
  - 温度范围: -20°C ~ +80°C

- Material:**
- Handle: ABS.
  - Plug: nickel plated heat treated beryllium copper.
- Handle: nylon.**
- Fits O.D. less 4mm banana plug or O.D. less than 5mm wire by screw.
  - Fits 4mm standard banana socket.




0532-B 0532-R



1003-B 1003-R



1325-B 1325-R



1325-B 1325-R

- Gold Plated.
- Banana Plug.
- Screw Type.
- 3mm/4mm



1007

- 说明:**
- 颜色: Red, Black, (Blue, Yellow, Green)
  - 电流: 10A
  - 绝缘电阻: DC500V 100MΩ
  - 承受电压: AC 1500V 1 minute
  - 温度范围: -20°C ~ +80°C
- Material:**
- Handle: ABS.
  - Plug: nickel plated heat treated beryllium copper.
  - EFits O.D. less 5mm wire by soldering.
  - EFits 4mm standard banana socket.



1009-B 1009-R



1318 镀金  
Double banana to binding posts.



MC-233200-22  
MC-233200-21

100Y 编号	厂商编号	说明	颜色
10088	0532-B	镀金香蕉插头	黑色
10087	0532-R	镀金香蕉插头	红色
7710	1003-B	镀金香蕉插头	黑色
7709	1003-R	镀金香蕉插头	红色
5888	1007-BLUE	4mm 香蕉插头-镀锡	蓝色
20051	1007-G	4mm 香蕉插头-绿色	
8084	1009-B	香蕉插头 90°	黑色
8083	1009-R	香蕉插头 90°	红色
3888	1318 镀金	连体香蕉头 4mm	红色, 黑色
3687	1322-B	4mm 镀金香蕉头	黑色
10767	1322-G	4mm 镀金香蕉头	绿色
10672	1325-B	镀金香蕉头锁线电木壳(音响用)	黑色
10636	1325-R	镀金香蕉头锁线电木壳(音响用)	红色
28314	MC-233200-21	SLB4-1/90 香蕉插座-黑色	黑色
28315	MC-233200-22	SLB4-1/90 香蕉插座-红色	红色
17217	R8-18-B	4mm 香蕉插头	黑色
17218	R8-18-R	4mm 香蕉插头	红色
17210	R8-27A-R	4mm 香蕉插头	红色
3261	TL-8125-B	Nickel. Socker Type 4mm 香蕉插头	黑色
3260	TL-8125-R	Nickel. Socker Type 4mm 香蕉插头	红色
4180	TL-8126-B	Nickel. Socker Type 香蕉插头 4mm	黑色
4179	TL-8126-R	Nickel. Socker Type 香蕉插头 4mm	红色

4mm 博士端子

详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)



3116A

- Material:**
- Insulation: nylon (UL flame: 94V-2)
  - Metal: Gold Flash.
  - φ4.0mm (0.160") banana socket with φ 4.0mm.
  - DC500V 100MΩ
  - AC 1000V 1 minute
  - 10°C +80°C



KPG-4

- 说明:**
- 4mm panel-mounting round socket with brass insert accepts a wide range of 4mm plugs.
  - Panel mounting hole 8mm
  - Contact surface: Gold/Tin-plated
  - Rated current: 19A 50V

100Y 编号	厂商编号	说明	颜色
7692	3116A	20A 连体端子镀金	红、黑色
3071	KPG-4-B	博士端子镀金 4mm	黑色
3070	KPG-4-R	博士端子镀金 4mm	红色

