4mm 博士端子

详细产品规格－请点击cn.100y.com.tw

1354

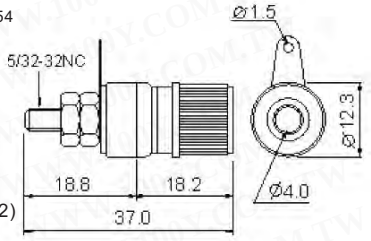

Material:
- Insulation : nylon(UL flame:94V-2)
  Metal : Gold Flash
- Binding post with ϕ4.0mm(0.160")banana socket.
- DC500V 100MΩ
- AC 1000V 1 minute
- -10℃~+80℃

3111

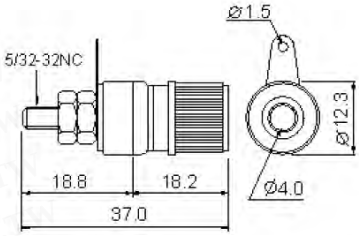

Material:
- Insulation : nylon(UL flame:94V-2)
  Metal : nickel plated brass
- Binding post with ϕ4.0mm(0.160")banana socket.
- DC500V 100MΩ
- AC 1000V 1 minute
- -10℃~+80℃

1355

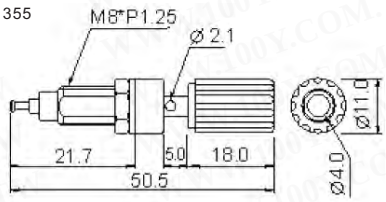

Material:
- Insulation:nylon(UL flame:94V-2)
- ϕ4.0mm(0.160") banana socket with
- DC500V 100MΩ
- AC 1000V 1minute
- -10 ℃~+80℃ □

Metal:Gold Flash
ϕ2.1mm(0.083") socket.

3114

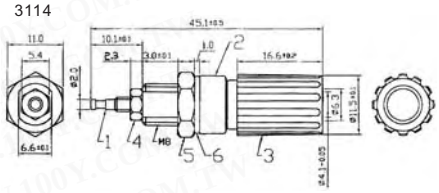

Material:
- Insulation:nylon(UL flame:94V-2)
- ϕ4.0mm(0.160") banana socket with
- DC500V 100MΩ
- AC 1000V 1minute
- -10 ℃~+80℃ □

Metal:nickel plated brass.
ϕ2.1mm(0.083") socket.

KSG-4



说明：
- 2/4 mm PCB mounting socket
- Mounting hole 2.8/4.8 mm
- Contact surface: Gold-plated
- Rated current :10/19A 50V

KSG-50A



说明：
- A range of 2/4mm socket design to easy and quick assembly.
- Mounting hole 4.5/6.5 mm.
- Contact surfae:Gold/plated.
- Pated current:10/19A 50V

KPG-4

KBL-4

KBL-4



说明：
- BEZEL to suit 2/4 mm socket to provide identification of socket
- Suited for KSG-30A/KSG-50A
- Panel mounting hole 4.5/6.5 mm

100Y 编号	厂商编号	说明	颜色
8380	1354-B	中型端子镀金	黑色
8379	1354-R	中型端子镀金	红色
3885	1355-B	博士端子-镀金/4mm	黑色
3886	1355-R	博士端子-镀金/4mm	红色
16182	3111-B	中型博士端子镀锡	黑色
16183	3111-R	中型博士端子镀锡	红色
5807	3111-Y	中型博士端子镀锡	黄色
28265	3114-B	4mm 博士端子/黑色	黑色
9116	3114-BL	4mm 博士端子	蓝色
8790	3114-G	4mm 博士端子	绿色
10964	3114-Y	4mm 博士端子	黄色
30398	8196S-B	黑色博士端子 4mm	黑色
30401	8196S-BL	蓝色博士端子 4mm	蓝色
30400	8196S-G	绿色博士端子 4mm	绿色
30397	8196S-R	红色博士端子 4mm	红色
30399	8196S-Y	黄色博士端子 4mm	黄色
3081	KBL-4-B	博士端子色环 4mm	黑色
28674	KBL-4-BL	博士端子色环 4mm	蓝色
3080	KBL-4-R	博士端子色环 4mm	红色
28676	KBL-4-W	博士端子色环 4mm	白色
3082	KBL-4-Y	博士端子色环 4mm	黄色
31682	KPG-4-BL		
31684	KPG-4-G		
31681	KPG-4-W		
3072	KPG-4-Y	博士端子镀金 4mm	黄色
3075	KSG-4	裸露镀金博士端子 4mm	镀金色
3088	KSG-50A-B	博士端子 4mm	黑色
3086	KSG-50A-R	博士端子 4mm/	红色
3087	KSG-50A-Y	博士端子 4mm	黄色