



隔绝套型鳄鱼夹



Material:
 ●Handle:PVC.
 ●Clip: Gold Flash.
 ●DC500V 100MΩ
 ●AC 500V 1minute
 ●-20℃~+80℃ ●50A

3004



●ALLGATOR CLIR WITH MOLDED HANDLE
 ●L(mm):37mm

AC70A



Gold-plated, beryllium-copper, spring contacts accept probe tips from .076" to .084" (1.93 mm to 2.13 mm). Standar djaw opening of .313" (8 mm). 1000V, 10A rating. One red, one black.

L12-0600-05



●最大输入电压 / 电流: 100V DC/35A
 ●电阻: 16MΩ
 ●开口幅度: 35mm
 ●接端: φ4mm diameter pin and socket

MC-66.9575



详细产品规格 - 请点击cn.100y.com.tw




Material:
 ●Handle:PVC.
 ●Clip: nickel plated steel.
 ●DC500V 100MΩ
 ●AC 500V 1minute
 ●-20℃~+80℃ ●30A

3005



●ALLGATOR CLIR WITH MOLDED HANDLE
 ●L(mm):61mm

R8-1A




Material:
 ● Handle :ABS Clip:nickel plated brass
 ●Alligator clip with 4.0mm socket
 ●-20℃~+80℃ □ ●3A ●AC1500V 1 minute ●DC500V 100MΩ



MC-66.9575

φ4mm safety socket in handle for accepting φ4mm safety leads or any other φ4mm Multilam plugs.

●Rated voltage: 100V, CATIII
 ●Rated current: PA
 ●Insulation: Max. 32A
 ●Operating temperature: -40℃~80℃
 ●Metal parts: Brass, nickel-plated
 ●Clamping limit: Max, 30mm, see sketch

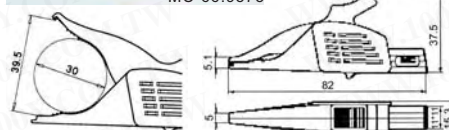

Standard colours*




100Y 编号	厂商编号	制造厂商	说明	颜色	L(mm)
7802	0757-B		小型蓄电池夹	黑色	75
7801	0757-R		小型蓄电池夹	红色	75
9278	0761-B		大型 50A 蓄电池夹	黑色	
3549	3004-B		迷你型鳄鱼夹	黑色	37
5872	3004-R		迷你型鳄鱼夹	红色	37
5873	3005-B		大鳄鱼夹	黑色	61
5869	3005-R		大鳄鱼夹-红色	红色	61
10635	3010-B		大型 50A 蓄电池夹	黑色	120
10634	3010-R		大型 50A 蓄电池夹	红色	120
36339	AC70A	FLUKE	FLUKE_鳄鱼夹 红/黑	红/黑	
16661	L12-0600-05		转换式安规大口径鳄鱼夹	红黑各一	82mm
14917	MC-66.9575-21		XDK-1033 DOLPHIN CLIPS, 鳄鱼夹	黑色	92
14920	MC-66.9575-22		XDK-1033 DOLPHIN CLIPS, 鳄鱼夹	红色	92
14921	MC-66.9575-24		XDK-1033 DOLPHIN CLIPS, 鳄鱼夹	黄色	92
14922	MC-66.9575-25		XDK-1033 DOLPHIN CLIPS, 鳄鱼夹	绿色	92
31125	MC-66.9755-21		XKK-1001 黑色鳄鱼夹	黑色	82.2
31126	MC-66.9755-23		XKK-1001 鳄鱼夹	蓝色	82.2
17214	R8-1A-B		4mm 鳄鱼夹	黑色	53mm
17213	R8-1A-R		4mm 鳄鱼夹	红色	53mm
17209	R8-1B-B		鳄鱼夹_2mm	黑色	53mm
17208	R8-1B-R		鳄鱼夹	红色	53mm

小测试点, 钩子, 夹线等

测试钩, 棒



GRIP-B/100

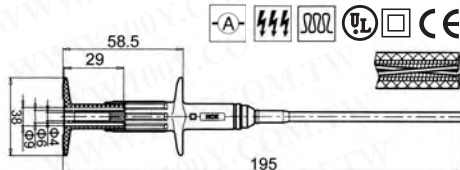

说明:

●Rated voltage: 100V, CATIII
 ●Rated current: 1A ●Insulation: PA
 ●Operating temperature handle: -40℃~+80℃
 ●Insulation shaft : Silicone
 ●Operating temperature shaft: -80℃~+105℃
 ●Clip: spring wire grabber , stainless steel
 ●Clamping limit: Max, approx. 5mm
 ●shaft lenght: 50mm



100Y 编号	厂商编号	制造厂商	说明	颜色	L(mm)
14567	GRIP-B/100-BLACK	MC	(大)测试钩	BLACK	197mm
14435	GRIP-B/100-RED	MC	(大) 测试钩	红色	197mm

