




DT - 通型端子台-平台锁螺丝式

详细产品规格 - 请点击cn.100y.com.tw



DT-65-B01W

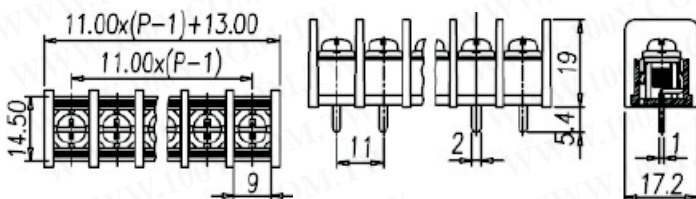

SPECIFICATION:

- Working temperatures: -40°C to +105°C
- Insulation withstands volt: AV2000V min
- Insulation resistance: 500mΩ or more at DC 500V
- Wire range: 22~12AWG
- Max. Torque Value: 18kg/cm

Materials

- Plastic housing : PA6.6 .UL94V-0. Black
- Terminal: Brass. 1.0t. Tin plated
- Screw: Steel .M4. Nickel plated



DT-7N-B01W-05

PECIFICATION:


- Working temperatures: -40°C to +130°C
- Insulation withstands volt: AV2000V min
- Insulation resistance: 1000mΩ at DC 500V
- Wire range: 18~10AWG
- Max. Torque Value: 18kg/cm

Materials

- Plastic housing : PBT. UL94V-0. Black
- Terminal: Brass. 1.01. Tin plated
- Screw: Steel .M4. Nickel plated



DT-45-A03W



说明:

- Material: Polyamide, UL94V-0
- Screw: steel, Ni plated
- Solder pin: Brass, Tin plated
- Temperature: -40°C to +105°C

100Y 编号	厂商编号	制造厂商	说明	Poles	U:长 mm	Pitch(mm)
3177	DT-45-A03W-05G		栅板型端子台	镀金 05P	66.5	9.5
10585	DT-45-A03W-06G		配线盘 300V/20A	6P		9.5
10586	DT-45-A03W-07		配线盘 300V/20A	7P		9.5
10587	DT-45-A03W-08		配线盘 300V/20A	8P		9.5
22085	DT-65-B01W-08		栅板型端子台	8P	89	11
21329	DT-65-B01W-09		栅板型端子台	9P	101	11
23940	DT-7N-B01W-05		栅板型端子台	5	68.08mm	13mm

TB - 通型端子台-平台锁螺丝

详细产品规格 - 请点击cn.100y.com.tw



TB-25-6



TB-15-3



TB-15-12



TB-15-6



TB-25-4



3046-5



TB-20-14




TB-25-12



TB-15-4

- TB-15、TB-25系列皆采用工程塑料，
- 耐高温(120°C以上)，
- 耐撞击。

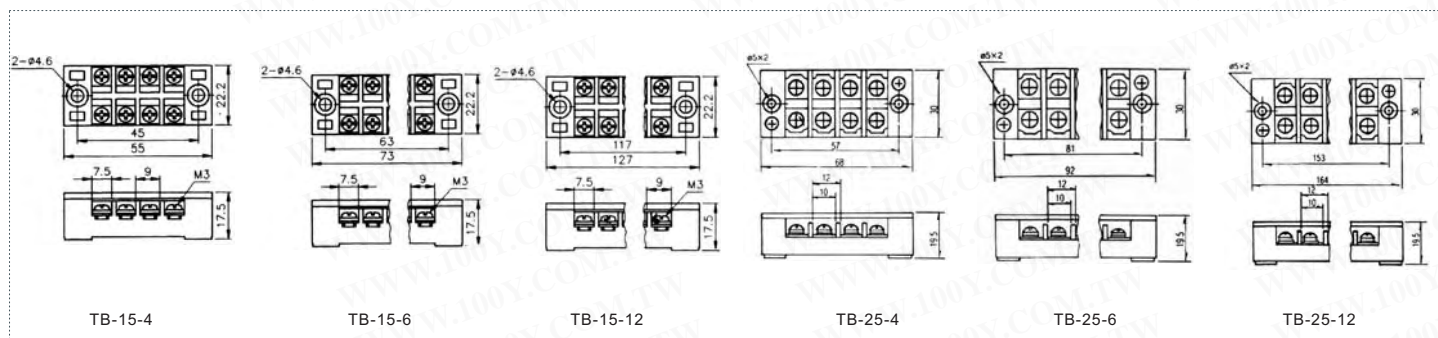

100Y 编号	厂商编号	说明	类型	Poles	L(mm)	L1(mm)
19515	3046-5	单端子台 PC 板式	3046	5P	72mm	
4247	3047-02P	二*2 联配电端子板美式	TB-10	2*2P	35.7	28.5
12017	TB-15-12	固定式端子盘 600V/15A	TB-15	12*2P	127	
34751	TB-15-3					
12011	TB-15-4	固定式端子盘 600V/15A	TB-15	4*2P	55	
12013	TB-15-6	固定式端子盘 600V/15A	TB-15	6*2P	73	
29211	TB-20-14	固定式端子盘 600V/20A	TB-20	14*2P	166.5	175.5
12018	TB-25-12	固定式端子盘 600V/25A	TB-25	12*2P	164	
12014	TB-25-4	固定式端子盘 600V/25A	TB-25	4*2P	68	
12015	TB-25-6	固定式端子盘 600V/25A	TB-25	6*2P	92	

