




探针

详细产品规格 - 请点击 cn.100y.com.tw

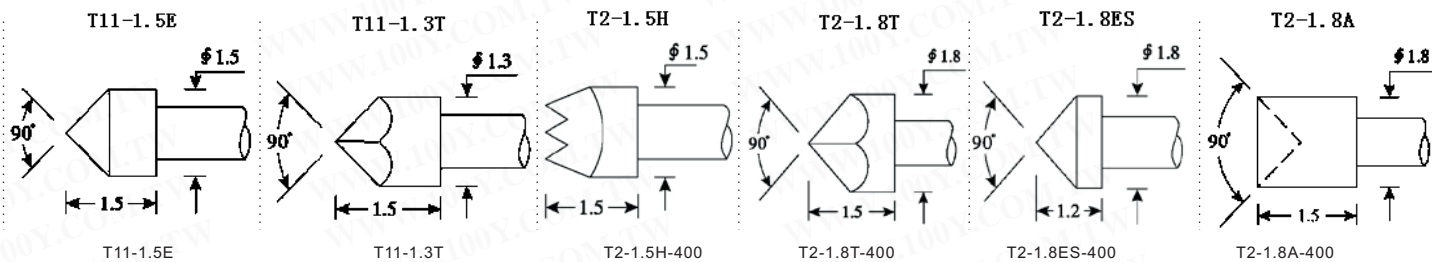

T11

最小间距(RECOMMENDED MIN CENTER): 1.9m/m
 钻孔尺寸(MOUNTING HOLE SIZE): 1.35m/m 1.40m/m
 材质(MATERIALS): PLUNGER: RH.PLATED BE CU
 BARREL: AU.PLATED BRASS
 行程(FULL TRAVEL): 4.2 m/m
 全压弹力(SPRING PRESSURE): 150g
 额定电流 (CURRENT RATING): 3A
 接触电阻 (CONTACT RESISTANCE): 50mΩ

T2


最小间距(RECOMMENDED MIN CENTER): 2.54m/m
 钻孔尺寸(MOUNTING HOLE SIZE): 1.7m/m 1.75m/m
 材质(MATERIALS): PLUNGER: RH.PLATED BE CU
 BARREL: AU.PLATED BRASS
 行程(FULL TRAVEL): 2.54, 3.0 m/m; 3.5, 4.0m/m
 全压弹力(SPRING PRESSURE): 150g
 额定电流 (CURRENT RATING): 3A
 接触电阻 (CONTACT RESISTANCE): 50mΩ

100Y 编号	厂商编号	制造厂商	说明	最小间距	钻孔尺寸	行程	弹力	额定电流	接触电阻	全长	尾端直径
39231	F585.10S.050.N.200		探针								
28080	F788-33S.060.L.165	Feinmetall	探针	2.54m/m	2.10m/m	6.4mm		2A	35mOhm	43mm	0.79mm
23762	T0-0.9E	T.C.P	长导脚,端子及绕线柱	1.27m/m	0.9m/m	2.54m/m	128gms	3A	50mlllloh	16.44mm	0.68
23763	T0-0.9T	T.C.P	长导脚,端子及绕线柱	1.27m/m	0.9m/m	2.54m/m	128gms	3A	50mlllloh	16.44mm	0.68
23764	T1-1.5T	T.C.P	探针	1.9m/m	1.4;1.45m/m	2.54m/m	128gms	3A	50mlllloh	17.04mm	1.01
23766	T11-1.3T	T.C.P	探针	1.9m/m	1.4;1.45m/m	4.2m/m	150gms	3A	50mlllloh	24.2m/m	1.01m/m
23767	T11-1.5E	T.C.P	探针	1.9m/m	1.4;1.45m/m	4.2m/m	150gms	3A	50mlllloh	24.2m/m	1.01m/m
12758	T2-1.5H-400	T.C.P	探针	2.54m/m	1.7;1.75m/m	2.54;3.0m/m 3.5;4.0m/m	150gms	3A	50mllllohms	24.5	1.36
12564	T2-1.8A-400	T.C.P	探针	2.54m/m	1.7;1.75m/m	2.54;3.0;3.5;4.0m/m	400gms	3A	50mlllloh	24.5	1.36
12565	T2-1.8ES-400	T.C.P	探针	2.54m/m	1.7;1.75m/m	2.54;3.0;3.5;4.0m/m	400gms	3A	50mlllloh	24.5	1.36
12542	T2-1.8H	T.C.P	探针	2.54m/m	1.7;1.75m/m	2.54;3.0;3.5;4.0m/m	150gms	3A	50mlllloh	24.5	1.36
12567	T2-1.8T-400	T.C.P	探针	2.54m/m	1.7;1.75m/m	2.54;3.0;3.5;4.0m/m	400gms	3A	50mlllloh	24.5	1.36

白色塑胶端子台
Polyethylene 端子台

详细产品规格 - 请点击 cn.100y.com.tw

TERMINAL BLOCK(Flat base type)



- Part Number: PA8 PA10 PA12 Pa14
- Terminal Type: Universal , Barrier , Screw Clamp , Others
- Voltage Rating (V): 450
- Current Rating (A): 57
- No. of Terminals: 1 to 12
- Housing Materials: Nylon , Thermoplastic , Polyamide
- Terminal Materials: Brass
- Plating: Nickel
- Pitch (mm): 10
- Max. Wire Size (AWG): 8
- Max. Wire Size (mm2): 10
- International/Safety Approval: CE VDE UL CSA FI OVE DEMKO SEMKO NENKO
- Additional Features: Flat,Raised & High Foot base avail

100Y 编号	厂商编号	说明	nom. Current (A)	Volt. Rating (r.m.s)	Approvals
3657	PA10F-04P	端子台	4	43*20.2*15.8	
4222	PA10F-05P	端子台			
4224	PA10F-06P	端子台			
4223	PA10F-07P	端子台			
3658	PA10F-08P	端子台	8	83*20.2*15.8	
4225	PA10F-09P	端子台			
3659	PA10F-10P	端子台	10	103*20.2*15.8	
3660	PA10F-11P	端子台	11	113*20.2*15.8	
3661	PA10F-12P	端子台	12	123*20.2*15.8	
27825	PA10H	端子台	450V/24A	12	CE
3650	PA8F-04P	端子台	4	35*16.3*13.3	
3649	PA8F-05P	端子台	5	43*16.3*13.3	
3651	PA8F-06P	端子台	6	51*16.3*13.3	
3653	PA8F-07P	端子台	7	59*16.3*13.3	
3652	PA8F-08P	端子台	8	67*16.3*13.3	
3654	PA8F-09P	端子台	9	75*16.3*13.3	
3655	PA8F-10P	端子台	10	83*16.3*13.3	
3656	PA8F-11P	端子台	11	91*16.3*13.3	
3648	PA8F-12P	端子台	12	99*16.3*13.3	

您只需透过本产品目录 & WWW.100Y.COM.TW 网站, 即可迅速搜寻所需产品 easy ordering

