




公 / 母 Ac插座

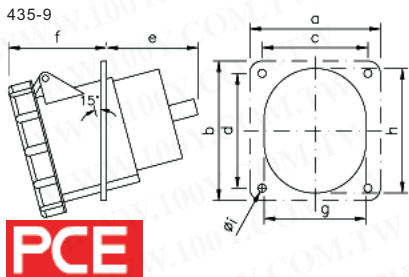

PCE

Ampere	16	16	16	32	32	32
Pole	3	4	5	3	4	5
Flansch a	100	100	100	120	120	120
Flansch b	112	112	112	130	130	130
Lochabst. c	80	80	80	100	100	100
Lochabst. d	88	88	88	108	108	108
e	75	75	75	94	94	94
f	75	75	75	80	80	80
g	82	82	82	93	93	93
h	100	100	100	110	110	110
i	7	7	7	7	7	7
Gewicht in Gramm	636	680	738	1064	1126	1316

详细产品规格 - 请点击cn.100y.com.tw



R7-22

FEATURES:


- Material : Housing : phenolic. Contact : nickel plated brass.
- Snap-in mounting, easy to install receptacle to panel.
- Fit flat and round plug.
- 15A 125V AC
- DC 500V 100M Ω
- AC 1500V



SO-11-1A UL-02-6201

Specifications:

- Contact Rating: 15A / 125 VAC
- Contact Resistance: 20 m Ω max
- Dielectric Strength: 1500 VAC / 1 minute
- Insulation Resistance: 100 m

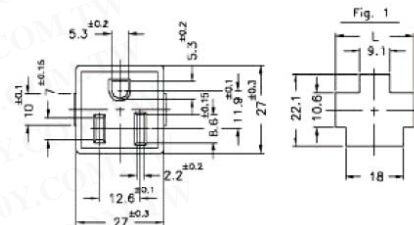

100Y 编号	厂商编号	制造厂商	说明	Current (A)	Voltage (VAC)	Terminals	Agency Approvals	Male/Female Plug
33908	435-9	PCE	FEMALE	63A	230V	5P(3P+N+E)	CE, OVE, VDE, KEMAEUR	工业埋入式插座 Flanged socket sloping
2629	R7-22		F	15	125	2		2P 电源插座
40610	SO-11-1A		3P 电源座 UL	15A	125VAC	3P	UL CSA	F
12147	UL-02-6201		3P 电源座 UL	15	125	3P	UL CSA	F



R-3014

附保险丝座

- Current (A):10A
- 2.5W
- Voltage (VAC):250V



R-3013

附保险丝座

Specifications:

- Insulation Resistance: 100 M Ω at 500 VDC
- Dielectric Strength: 2000 VAC / 1 minute
- Body Material: Nylon 66 UL 94V-0



100Y 编号	厂商编号	说明	Current (A)	Voltage (VAC)	Terminals	Agency Approvals	Male/Female Plug
8389	R-3013	M	10	250	3	UL	附保险丝座 3P 有耳朵公插座
8390	R-3014	Male					附保险丝座 3P AC 公插座



2184

MATERIAL:

- Housing:plastic,PBT with 30% Glass fiber, flammability 94V-0
 - Terminal:Copper alloy,tin plated
- Specifications:
- Contact Rating: 2.5A / 250 VAC
 - Insulation Resistance: 100 m Ω / 500 VDC
 - Dielectric Strength: 2000 VAC / 1 minute
 - Terminal Type: Solder, PCB
 - Operating Temperature:-25°C TO+85°C



105-0G

A
M
P
E
R
E

230V
50-60Hz
blau
blue




Code 16 Farbe/colour 105-0g grau/grey




LK2432F

插座
电木
NEMA: L15-30R



LK5432

插座
电木, 橡胶



100Y 编号	厂商编号	制造厂商	说明	Current (A)	Voltage (VAC)	Terminals	Agency Approvals	Male/Female Plug
3223	105-0G	PCE	Female	16A	230V-250V	2PIN	VDE, OVE, KEMAEUR	工业埋入式插座 Socket outlet (DIN 49440)
4525	2184		M	2.5	250	2	UL	8 字型 AC 座
33729	LK2432F	LKEN	4P Receptacle 30A	30A	250V	4P		
36004	LK5432	LKEN						



LK-5320

20A 引挂式缆线中间插接头

型号
LK5320S
LK5320



品名
3P20A 引挂式电缆线 全组
Y型3P20A引挂橡胶母插 单座
中间插接 250V



LK-5215

AC插座 母座
H型3P15A接地电缆线
中间橡胶插座
125V 15A



2021

100Y 编号	厂商编号	制造厂商	说明	Current (A)	Voltage (VAC)	Terminals	Agency Approvals	Male/Female Plug
29039	2021		母座			2P		2P AC 母座
19791	LK-5215	LKEN	H 型 3P15A 接地电缆线中间橡胶插座	15A	125V			Female Socket
16698	LK-5320	LKEN	Y 型 3P20A 引挂橡胶母插	20A	250V			F

