



Rj45母插座

详细产品规格 - 请点击cn.100y.com.tw



610S-8811-13031

Material:

Housing :PBT polyester UL94V0
Color:black
Contacts :0.35mm thickness alloy
Selective gold plating
Shield -0.25mm thickness copper
Alloy with nickel plated


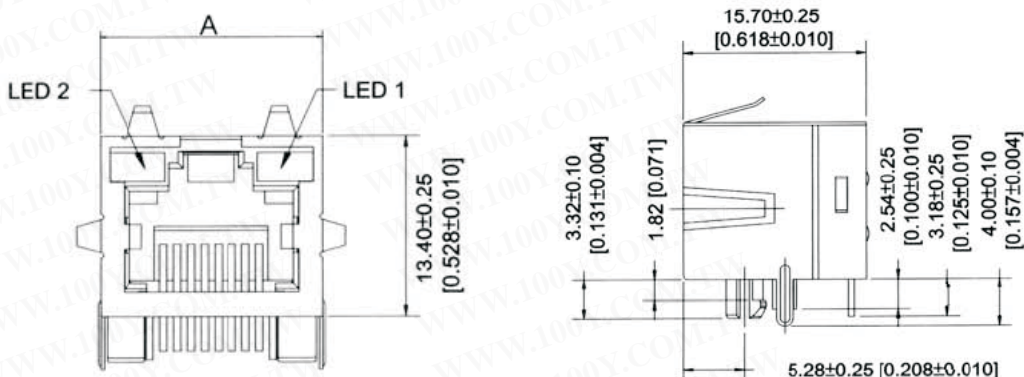


Table with 3 columns: 100Y 编号, 厂商编号, 说明




Materials:

BOX: UL94V-0 ABS
Jack :RJ-45 8P8C,50micro inches gold plated [UL-94V-0 PBT]
Terminal block : UL 94V-0 ABS---Dual type
Nylon-6-66---110type

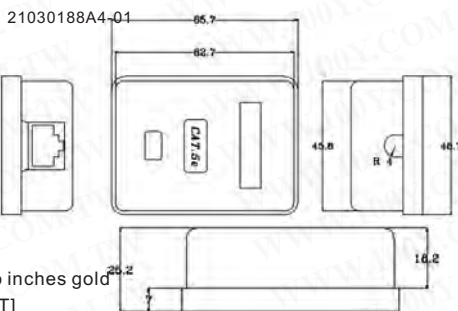

Dual type block can be punched down with krone or AT&T tool
110 type block can be punched down with AT&T tool only.

Table with 4 columns: 100Y 编号, 厂商编号, 制造厂商, 说明

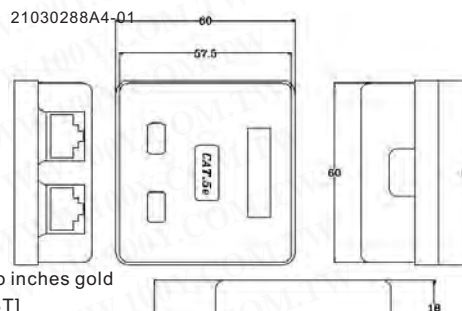

Materials:

BOX: UL94V-0 ABS
Jack :RJ-45 8P8C,50micro inches gold plated [UL-94V-0 PBT]
Terminal block : UL 94V-0 ABS---Dual type
Nylon-6-66---110type



Dual type block can be punched down with krone or AT&T tool
110 type block can be punched down with AT&T tool only.



9039
9038

特征:
- 配线终端之连结, 可用RJ-45 跳接线连接至电话或计算机。
- 附标示卡及双面胶供使用, 防尘盖以防止灰尘及湿气。

规格:
- 外壳采用白色ABS耐冲击塑料, 符合UL-94V0规定。
- 采用110 IDC绝缘置换方式, 适合22AWG-26AWG线径。

电气特性:
- 额定电流Current Rating : 1.5 Amp
- 直流电阻DC Resistance : 0.1Omaximum

◆可选用蓝色ICON标示计算机, 或选用绿色ICON标示电话。
◆若以充胶线连结信息插座, 跳接线充胶部份须与RJ-45外尺寸切齐, 以利跳接线接头与信息插座孔位兼容。

◆JACK接点镀金50微英吋, 拔插寿命最少可达750次。

◆绝缘电阻Insulation Resistance : 500 MOminimum
◆接点电阻Contact Resistance : 20 mO maximum

Table with 4 columns: 100Y 编号, 厂商编号, 说明



18141
14238

9037
Type: CAT5e Snap-in Keystone Jack (8P8C)
Termination: 110 Style 90 Degree punch down for 22-26 AWG solid wire
Use With: Any Computer Cable Store Blank Wall Plate or Patch Panel
T568A & T568B wiring compatible
UL listed



29165028812-01
Materials:
Case : UO-94V-0 ABS
Jack :RJ-45 8P8C, 50 micro inches gold plated [UL-94V-0 PBT]
PCB:FR-4

Table with 4 columns: 100Y 编号, 厂商编号, 说明



2582
15398

Electrical:
Current rating: 1.5 Amps.
Insulation resistance: 500Mega-ohms min.
Contact resistance: 20 milli-ohms max.
DC resistance: 0.1 ohms max.
Data transmission rates up to 100Mbps.



2606266P9-01

Electrical:
Current rating: 1.5 Amps.
Insulation resistance: 500Mega-ohms min.
Contact resistance: 20 milli-ohms max.
DC resistance: 0.1 ohms max.
Data transmission rates up to 100Mbps.



Table with 4 columns: 100Y 编号, 厂商编号, 制造厂商, 说明

