




热电致冷器



HMS-S20

致冷晶片模组 3A/12V

- 电压：12V
- 最大电压值：最高勿超过14.2V
- 电流：3A
- 消耗功率：25W
- 风扇电压：12V
- L*B*H (mm)：30*30*4.0 (晶片)
- Tmax (°C)：>60°C

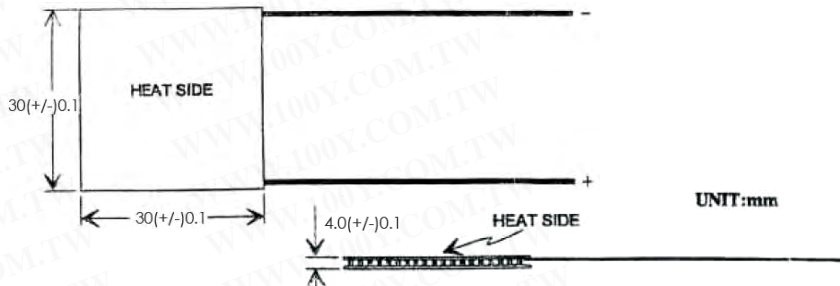


100Y 编号	厂商编号	说明	L*B*H (mm)	I _{max} (A)	V _{max} (V)	T _{max} (°C)	最大产冷功率 Oc _{max} W
37588	HMS-S20	致冷芯片模组 3A/12V	30*30*4.0 (芯片)	3A	12V	>60°C	25W

详细产品规格 - 请点击 cn.100y.com.tw


散热片+散热膏 大型高热量用散热片




KH100-45

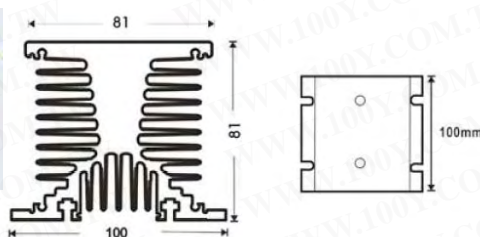

Model No	Kh100 SERIAL Length L(mm)	Suitable SSR
KH100-45	45	10A
KH100-70	70	25A
KH100-100	100	40A
KH100-120	120	50A
KH100-150	150	75A, 100A



KH104-104-2 KH104-104

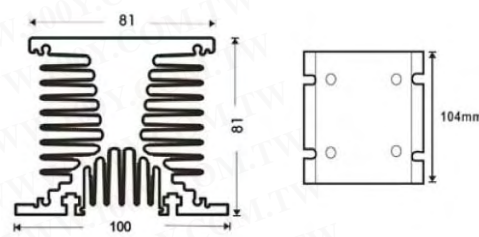


Model No	Kh104-104 For 3 phase ssr Length L(mm)	Suitable SSR
KH104-104	104	25A, 40A
KH104-120 (And Fan)	120	50A
KH104-150 (And Fan)	150	75A, 100A

详细产品规格 - 请点击 cn.100y.com.tw




KH060-50

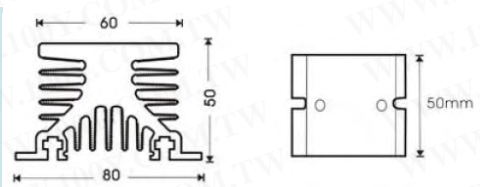

Model No	Kh60 SERIAL Length L(mm)	Suitable SSR
KH60-50	50	10A, 15A
KH60-80	80	25A
KH60-100	100	40A
KH60-120	120	50A
KH60-150	150	75A




KH100-200

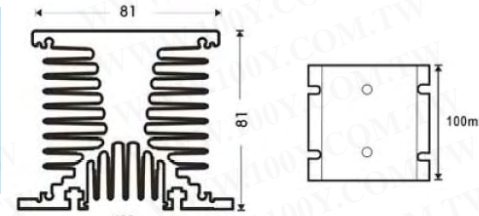

Model No	Kh100 SERIAL Length L(mm)	Suitable SSR
KH100-45	45	10A
KH100-70	70	25A
KH100-100	100	40A
KH100-120	120	50A
KH100-150	150	75A, 100A



KH185-100 KH185-70

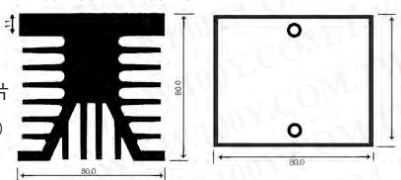

25A-90A固态继电器用散热片
产品尺寸：
100 (L) x 80 (W) x 80 (H) (mm)
产品规格：
SSR用散热片100mm



KH368-300

Description 继电器散热片
Size 80*50*300

Model No	Kh100 SERIAL Length L(mm)	Suitable SSR
KH368-50	50	5A, 10A, 15A
KH368-300	300	10A

100Y 编号	厂商编号	制造厂商	说明	Size
13081	KH060-50	KYOTTO	继电器散热片	80*50*50mm
38425	KH100-200	KYOTTO	继电器散热片	80*80*200mm
28492	KH100-45	KYOTTO	继电器散热片	80*80*45mm
32029	KH104-104	KYOTTO	大型高热量用散热片	81mm*81mm
32030	KH104-104-2	KYOTTO	大型高热量用散热片	81mm*81mm
7114	KH185-100	KYOTTO	继电器散热片	80*80*100
7113	KH185-70	KYOTTO	继电器散热片	80*70*80mm
13080	KH368-300	KYOTTO	继电器散热片	80*50*300

