




DC 风扇




KD1204PKB2(2) KD0504PFB3-8  
KD1204PFB1-8(2)

- 5.2 to 7.0 CFM
- 4.5 to 6.9 CFM
- 5 and 12 VDC (nominal)
- Patented Single-coil Brushless 8 Poles DC Motor Design
- Available with 4 Poles or 8 Poles Motor
- Locked Rotor Protection
- Low Power Consumption
- Polarity Protected
- Lubricated Sintered Sleeve Bearing System or Precision Ball Bearing System
- 26 AWG UL Rating Lead wire, "+" Red and "-" Black
- UL, CUR & TUV Approval

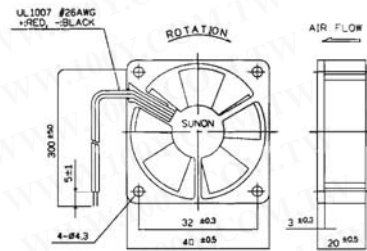

UNIT: mm KD1204PKB2(2)

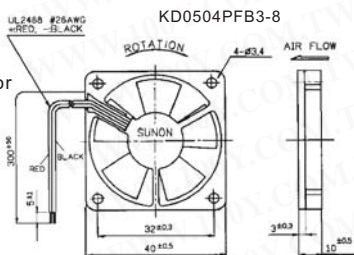


KD0504PFB3-8  
**SUNON.**

详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)



KD2412PMB1-6A  
KD2412PMB1-6A  
KD1212PTB1-6A  
KD1212PMSX-6A  
KD2412PMSX-6A  
KD2412PMS1-6A  
KD1212PTB2-6A  
KD4812PMS1-6A

- 83 to 120 CFM
- 12 and 24 VDC (nominal)
- Patented Single-coil Brushless 6 Poles DC Motor Design
- DC Motor Protected by IC
- Locked Rotor Protection
- Polarity Protected
- Lubricated Sintered Sleeve Bearing System or Precision Ball Bearing System
- 26 AWG UL Rating Leadwire, "+" Red and "-" Black
- UL, CUR & TUV Approval

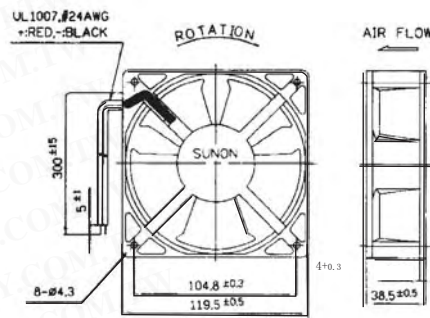


**SUNON.**

100Y 编号	厂商编号	制造厂商	说明	尺寸(mm)	电压	r.p.m	电流(A)	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
18770	KD0504PFB3-8	SUNON	风扇带线式	40x40x10	DC5V	5300	0.07	0.35	4.6	23.5	Ball
17399	KD1204PFB1-8(2)	SUNON	风扇带线式	40*40*10	12V		0.07A				Ball
15304	KD1204PKB2(2)	SUNON	风扇带线式	40*40*20	12VDC	6400	0.07	0.9	6.8	29	BALL
12001	KD1212PMSX-6A	SUNON	风扇带线式	120*120*38mm	12VDC	3100	0.63	7.6	119	45	Sleeve
5004	KD1212PTB2-6A	SUNON	风扇带线式	120*120*25mm	12Vdc	2800	0.30	3.6W	80	41	Ball
16412	KD2412PMB1-6A	SUNON	风扇带线式	120*120*25	24VDC	3100	0.31	6.7	108	42	Two Ball Bearing
16297	KD2412PMB1-6A	SUNON	风扇带线式	120*120*38	24VDC	3100	0.31	6.7	108	42	Two Ball Bearing
7781	KD2412PMS1-6A	SUNON	风扇带线式风扇	120*120*38	24V	3000	0.31	7.4	107	41	Sleeve
10631	KD2412PMSX-6A	SUNON	风扇带线式	120*120*38mm	24Vdc	3100	0.33	7.9	119	45	Sleeve
16444	KD2412PTS1-6A	SUNON	风扇带线式	120*120*25mm	24	3000	0.25A	6W	88	44	Sleeve Bearing
1790	KD4812PMS1-6A	SUNON	风扇带线式	120*120*38mm	48Vdc	2900		9.1W	132.5	46	Sleeve



DF126020SM-4P\*2-540mm

DIMENSIONS: 60X60X20(mm)

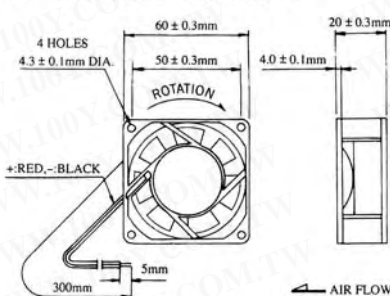

PERFORMANCE CURVE-




DC BRUSHLESS FAN FEATURES

- Housing: Thermoplastic UL94V-0 P.B.T.
- P.C.B.: UL standard 94HB
- Lead wire: AWG #24. UL1007, 300mm Length
- Bearing: Ball Bearing & Sleeve Bearing.
- Insulation Resistance: 10M ohm at 500 V DC between lead wire (+) and frame
- Dielectric Withstand : 5mA Max. at 500V AC for 1 Min. between lead wire (+) and frame
- Life Expectancy : 50,000 Hours at 25°C. Ball bearing  
20,000 Hours at 25°C. Sleeve bearing
- Operating Temperature: Fan satisfy their specification after exposure (-10°C ~ +65°C)
- Storage Temperature: -30°C ~ +70°C for 100 hours and returned to normal room temperature for 24 hours.
- Above measurements apply at 25°C 5°C reiative humidity 65% 15% (RH)



DF246020SM

DIMENSIONS: 60X60X20(mm)

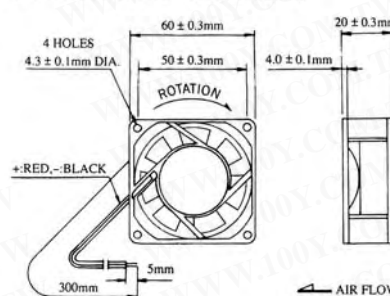

PERFORMANCE CURVE:



DC BRUSHLESS FAN FEATURES

- Housing: Thermoplastic UL94V-0 P.B.T.
- P.C.B.: UL standard 94HB
- Lead wire: AWG #24. UL1007, 300mm Length
- Bearing: Ball Bearing & Sleeve Bearing.
- Insulation Resistance: 10M ohm at 500 V DC between lead wire (+) and frame
- Dielectric Withstand : 5mA Max. at 500V AC for 1 Min. between lead wire (+) and frame
- Life Expectancy : 50,000 Hours at 25°C. Ball bearing  
20,000 Hours at 25°C. Sleeve bearing
- Operating Temperature: Fan satisfy their specification after exposure (-10°C ~ +65°C)
- Storage Temperature: -30°C ~ +70°C for 100 hours and returned to normal room temperature for 24 hours.
- Above measurements apply at 25°C 5°C reiative humidity 65% 15% (RH)

100Y 编号	厂商编号	制造厂商	说明	尺寸(mm)	电压	r.p.m	电流(A)	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
40639	DF126020SM-4P*2-540mm	Dynaon	风扇+大 4P 接头	60*60*20mm	12V	4200	0.23A	2.76W	19.5	26.5	Sleeve
40640	DF246020SM	Dynaon	风扇带线式	60*60*20	24V	4200	0.13A	3.12W	17.53	32.52	Sleeve(轴承)

