




DC 风扇

详细产品规格 - 请点击 cn.100y.com.tw


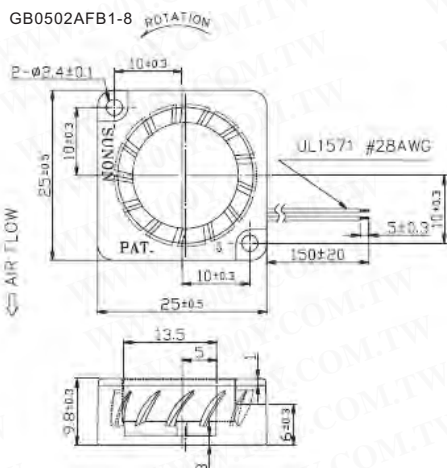


Description: 风扇带线式
Volt.: 5V
r.p.m: 12000
Current(A): 0.18A
Watts: 0.9
Air Flow(CFM): 0.9
Noise (dBA): 34
Ball/Sleeve: Ball
Size(mm): 25*25*10

SUNON.




GB0504AFB1-8
Description: DC风扇
Volt.: 5V
r.p.m: 6500
Current(A): 0.06
Watts: 0.3
Air Flow(CFM): 1.8
Noise (dBA): 31
Ball/Sleeve: BALL
Size(mm): 40*40*9

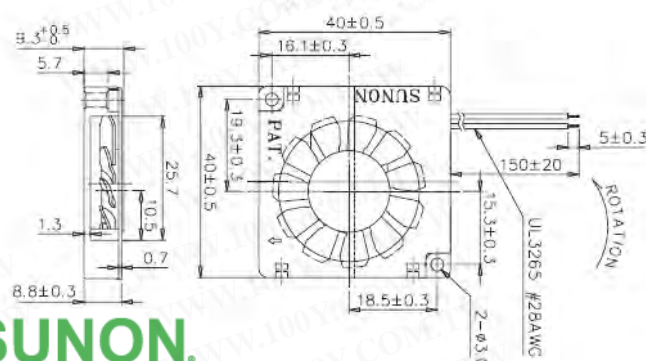

SUNON.

100Y 编号	厂商编号	制造厂商	说明	尺寸(mm)	电压	r.p.m	电流(A)	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
25781	GB0502AFB1-8	SUNON	风扇带线式	25*25*10	5V	12000	0.18A	0.9	0.9	34	Ball
23607	GB0504AFB1-8	SUNON	DC 风扇	40*40*9	5V	6500	0.06	0.3	1.8	31	BALL

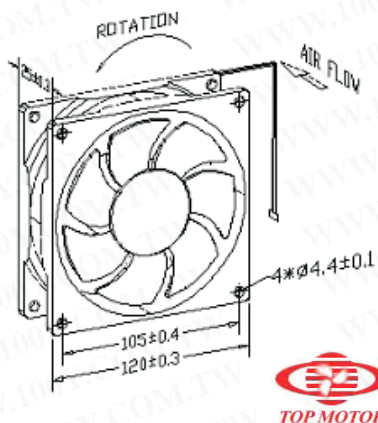

DF1212025SM-3
电压 (VDC) : 12/24/48
转速 (RPM) : 1800-2900
风量 (CFM) : 62.7-105.04
电流 (AMP) : 0.13-0.8
功率 (WATTS) : 3-13.22



F-5*5/4P
Description: 风扇+大4P接头
Volt.: 12V
r.p.m: 2500
Current(A): 0.08
Air Flow(CFM): 28.2
Ball/Sleeve: Sleeve
Size(mm): 50*50*16mm



F-5*5/3P
Description: 风扇+小3P接头
Volt.: 12V
Current(A): 0.08
Watts: 0.96
Ball/Sleeve: Sleeve
Size(mm): 50*50*1.4mm

100Y 编号	厂商编号	制造厂商	说明	尺寸(mm)	电压	r.p.m	电流(A)	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
37113	DF1212025SM-3	Dynaeon	风扇带线式	120*120*25.4mm	12Vdc	2200	0.38A		76.63	38.64	Sleeve
31124	F-5*5/3P	SCE	风扇+小 3P 接头	50*50*1.4mm	12V		0.08	0.96			Sleeve
36415	F-5*5/4P	SCE	风扇+大 4P 接头	50*50*16mm	12V	2500	0.08		28.2		Sleeve



3610KL-04W-B69
Description: DC 风扇
Volt.: 12V
r.p.m: 3600
Current(A): 0.43A
Watts: 5.16W
Air Flow(CFM): 61.8
Noise (dBA): 44.5
Ball/Sleeve: Ball Bearing
Size(mm): 92mm*92mm*25mm



MCKDE2412PTB2-6A
Description: 风扇
Volt.: 24V
r.p.m: 2800
Current(A): 0.17A
Watts: 4.8W
Air Flow(CFM): 80
Noise (dBA): 11
Ball/Sleeve: BALL
Size(mm): 120*120*25mm

100Y 编号	厂商编号	说明	尺寸(mm)	电压	r.p.m	电流(A)	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
28719	3610KL-04W-B69	DC 风扇	92mm*92mm*25mm	12V	3600	0.43A	5.16W	61.8	44.5	Ball Bearing
22119	MCKDE2412PTB2-6A	风扇	120*120*25mm	24V	2800	0.17A	4.8W	80	11	BALL

电子零件采购网 WWW.100Y.COM.TW 百年电子
-电子零件 材料 仪器-

