



DC 风扇

详细产品规格 - 请点击 cn.100y.com.tw



KD1204PKV3(MS).M



KD2408PTS1.13.AF



KD2408PTS1.13.A.GN



KD2409PTS1.13.A.GN



KD1206PTS1.H.M



KD2412PTB1-6AR-100cm线
KD2412PTB1-6AR



KD2409PTS3.13.A
KD2408PTS3.13.A

60x60x25 mm

Model	P/N	Bearing	(VDC)	(AMP)	(WATTS)	(RPM)	(CFM)	(Inch-H2O)	(dBA)	(g)
KD1206PTS1	13	Sleeve	12	0.13	1.6	4400	23.0	0.24	32	73

80x80x25 mm

Model	P/N	Bearing	(VDC)	(AMP)	(WATTS)	(RPM)	(CFM)	(Inch-H2O)	(dBA)	(g)
KD2408PTS1	13.A	Sleeve	24	0.08	1.9	3000	40.0	0.18	33	80
KD2408PTS3	13.A	Sleeve	24	0.05	1.2	2300	31.0	0.11	26	80

92x92x25 mm

Model	P/N	Bearing	(VDC)	(AMP)	(WATTS)	(RPM)	(CFM)	(Inch-H2O)	(dBA)	(g)
KD2409PTS1	13.A	Sleeve	24	0.09	2.2	2800	49.0	0.16	34	95
KD2409PTS3	13.A	Sleeve	24	0.05	1.2	2200	39.0	0.11	28	95

120X120X25 mm

Model	P/N	Bearing	(VDC)	(AMP)	(WATTS)	(RPM)	(CFM)	(Inch-H2O)	(dBA)	(g)
KD2412PTB1-6A		☉	24	0.22	5.3	3100	90	0.28	44.5	200
KD2412PTS2-6A		☉	24	0.17	4.1	2700	78	0.21	40	200

Motor

Patented Brushless DC motor design.

Frame

Injection molded non-flammable black thermoplastic
UL 94V-0 rating and aluminum

Bearing System :

Precision, life-lubricated ball bearing system
Precision, oil-impregnated sintered sleeve bearing system

Insulation

Class E integral ground system rated @100 Deg C

Insulation Resistance

More than 500M ohm between internal stator and lead wire(+) measured by DC 500V

Dielectric Strength

600VAC for one minute

Safety Protection :Electronic locked rotor protec

Operating Temperature

-10 to +70 Deg.C

Storage Temperature


-40 to +70 Deg.C

Operating Voltage

Rated voltage ±15%

Professional Design

We Can design to fit any special application requ

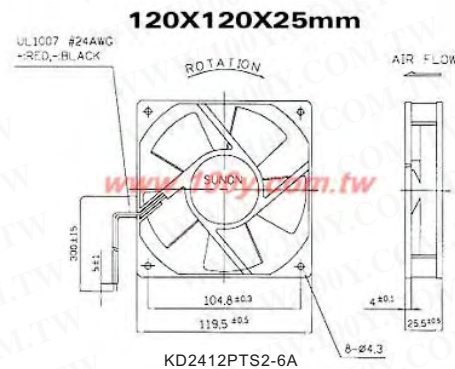

100Y 编号	厂商编号	制造厂商	说明	尺寸(mm)	电压	r.p.m	电流(A)	Watts	Air Flow(CFM)	Noise (dBA)	Ball/Sleeve
27079	KD1204PKV3(MS).M	SUNON	风扇带线式	40*40*20	12V	5200	0.05A	0.6W	6.3	18	VAPO
40179	KD1206PTS1.H.M	SUNON	风扇带线式	60*60*25mm	12			1.9			Sleeve
12105	KD1212PTB1-6A	SUNON	风扇带线式	120*120*25	12V	3100		4.8	90	44.5	Ball
28060	KD2405PFS1-8	SUNON	DC 风扇带线式	50*50*10	24V	5400		1	10.2	31.5	Sleeve
33536	KD2408PTS1.13.A.GN	SUNON	DC 风扇带线式	80*80*25mm	24V	3000	0.067	1.6	40	33	Sleeve
28474	KD2408PTS1.13.AF	SUNON	风扇带线式	80*80*25mm	24V	3000	0.08	1.9	40	33	Sleeve
29360	KD2408PTS3.13.A	SUNON	风扇带线式	80*80*25mm	24V	2300	0.05	1.2	31.0	26	Sleeve
39919	KD2409PTS1.13.A.GN	SUNON	风扇带线式	92*92*25mm	24Vdc	2800	0.08	1.9W	49	34	Sleeve
29361	KD2409PTS3.13.A	SUNON	风扇带线式	92*92*25mm	24Vdc	2200	0.05	1.2	39	28	Sleeve
27105	KD2412PTB1-6AR	SUNON	风扇带线式风扇	120*120*25	24V		0.24A				2BALL
28243	KD2412PTB1-6AR-100cm 线	SUNON	风扇带线式风扇	120*120*25	24V		0.24A				2BALL
16227	KD2412PTS2-6A	SUNON	风扇带线式	120*120*25mm	24	2700	0.2A	4.8	78	40	Sleeve Bearing
13334	KS2412PTS2-6A	SUNON	风扇带线式	120*120*25mm	24V	2700		4.8	78	40	Sleeve



更多详细资料请点击 CN.100Y.COM.YW

