


交流信号输入光耦合 IC

详细产品规格 - 请点击 cn.100y.com.tw

100Y 编号	厂商编号	制造厂商	说明	Emitter Vf	Emitter If	Detector Iceo	Detector Vceo	CTR(%)	Isolation(Vrms)
40990	OP1264A	OPTEK	OPTICALLY COUPLED ISOLATORS	1.6A	20mA	200nA	30V	50-125%	2V
34383	OP1264B	OPTEK	OPTICALLY COUPLED ISOLATORS	1.6A	20mA	200nA	30V	50-125%	2V



特点:


1. AC 输入
2. 高隔离电压在输入和输出之间 ($V_{iso} = 5000V_{rms}$)
3. 协定双重在封装内
PC814 (1-channel type)
PC824 (2-channel type)
PC844 (4-channel type)
4. 转让比率
CTR: MIN. 20% 在 $I_f = \pm 1mA, V_{ce} = 5V$
5. 由UL 认可, 文件NO. E64380

应用:

1. 可编程的控制器
2. 电话机, 电话交换机
3. 系统器具
4. 发信号传输在不同的潜力电路和阻抗之间

100Y 编号	厂商编号	制造厂商	说明	Emitter Vf	Emitter If	Detector Iceo	Detector Vceo	CTR(%)	Isolation(Vrms)	Pins/Packing
8095	PC814	SHARP	High isolation-AC Input Optoisolators	1.4V	50mA	100nA	35V	20-300%	5000V	4P/DIP
19343	PC814A	SHARP	AC Input Photocoupler	1.2V	+50mA	50mA	35V	20-300%	5000V	4P/DIP

3. SMT Gullwing Lead-Form [ex. PC814XPJ000F]







特点:

1. 4针 DIP 包装
2. 双重调制模子包裹(理想为流程焊接)
3. AC输入型号
4. 高集电器放射器电压 ($V_{ceo} = 80V$)
5. 转让比率 (CTR: MIN. 20% 在 $I_f = \pm 1mA, V_{ce} = 5V$)
6. 高隔离电压在输入和输出之间 ($V_{iso(rms)} = 5.0kV$)
7. 无铅和RoHS 方向性服从

应用:

1. 可编程的控制器
2. 电话机, 电话交换机
3. 系统器具
4. 发信号传输在不同的潜力电路和阻抗之间

100Y 编号	厂商编号	制造厂商	说明	Emitter Vf	Emitter If	Detector Iceo	Detector Vceo	CTR(%)	Isolation(Vrms)	Pins/Packing
39403	PC814XP1J00F	SHARP	High isolation-AC Input Optoisolators	1.4V	50mA	100nA	80V	20-300%	5000V	4P/SMD






- 集电器放射器电压: 80V (min.)
- 转让比率: 50% (min.)
GB列: 100% (min.)
- 隔离电压: 3750Vrms (min.)
- UL认可: UL1577, 文件 NO. E67349

TOSHIBA 微型平的耦合装置TLP121是一种小概述耦合装置, 适当为表面登上汇编。
TLP121包括相片晶体管, 光学上被结合对砷化镓红外散发的二极管

100Y 编号	厂商编号	制造厂商	说明	Emitter Vf	Emitter If	Detector Iceo	Detector Vceo	CTR(%)	Pins/Packing
47575	TLP121	TOSHIBA	IC 型光耦合器	80V	50mA	50mA	80V	50%	SOP-4P

达灵顿输出光耦合 IC

详细产品规格 - 请点击 cn.100y.com.tw

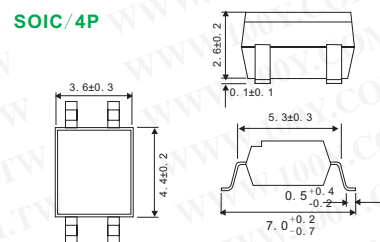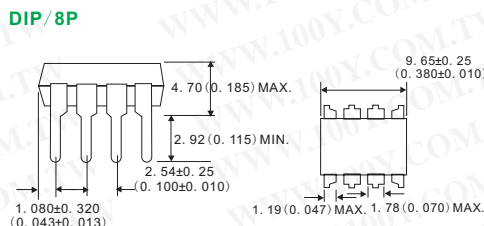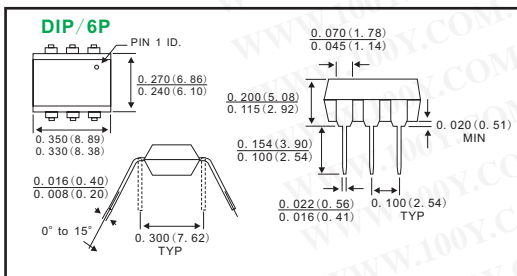

100Y 编号	厂商编号	制造厂商	说明	CTR(%)	Detector Ic	Detector Vceo	Emitter If	Emitter Vf	Isolation(Vrms)	Pins/Packing
35795	4N	VISHAY	Optocoupler, Photodarlington Output, High Gain, With Base Connection	500%		30V	60mA			6P-DIP
35803	4N25	IR	Industry Standard Single Channel 6 Pin DIP Optocoupler	20%	50nA	30V	100mA	1.5V	5300V	6P/DIP
7995	4N32	Fairchild	High CTR-PHOTODARLINGTON OUTPUT	500%	150mA	30V	60mA	1.2V	2500AC	6P-DIP
8006	4N33	Fairchild	High CTR-Darlington Output	500%	50mA	10V	10mA	1.5V	7500V	6P/DIP
35801	4N35	VISHAY	Industry Standard Single Channel 6 Pin DIP Optocoupler	100%	50nA	30V			5300V	6P/DIP
35797	4N38	VISHAY	Industry Standard Single Channel 6 Pin DIP Optocoupler	10%	50nA	80V			5300V	6P/DIP
4140	6N138	QTC	High Sensitivity, High Speed *OPIC Photocoupler	300% min	60mA	7	20mA	1.7V	5300Vrms	8P/DIP
35698	6N138	HP	Low Input Current, High Gain Optocouplers	300% min	60mA	7	20mA	1.7V	5300Vrms	8P/DIP
4141	6N139	Fairchild	High Sensitivity, High Speed * OPIC Photocoupler	400% min	60mA	18	20mA	1.7V	2500V	8P/DIP
16301	H11B1	QTC	Darlington Output-PHOTODARLINGTON OUTPUT	500% min	100mA	25V	60mA	1.5V max	5300 Vrms	6P/DIP
18057	H11G1	QTC	High Volt. Darlington	100mA(1000%)	100nA	100V	60mA	1.3V	5300Vrms	6P/DIP
35443	H11G1	Fairchild	HIGH VOLTAGE PHOTODARLINGTON OPTOCOUPERS	100mA(1000%)	100nA	100V	60mA	1.3V	5300Vrms	6P/DIP
33234	H11G2	ISOCOM	HIGH VOLTAGE DARLINGTON OUTPUT OPTICALLY COUPLED ISOLATOR	1000%	100 mA	80V	60mA	1.5 V	5300Vrms	6P/DIP



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699

上海: 86-21-64605107

上海: 100y-1@163.com