



# 电源供应器+转换器+UPS

## 100W-375W PFC功能四组交换式电供器

详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)

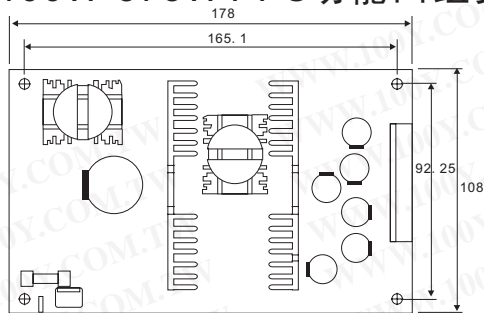

100Y 编号	厂商编号	制造厂商	说明	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current
31224	PPQ-1003A	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±6%	-5V/0.0~1.0A	±6%	12V/0.2~3.0A	±3%	5V/2.0~15A	±3%	3.3V/0.0~15A
31226	PPQ-1003B	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±6%	-12V/0.0~1.0A	±6%	12V/0.2~3.0A	±3%	5V/2.0~15A	±3%	3.3V/0.0~15A
31227	PPQ-1003C	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±6%	-15V/0.0~1.0A	+10%, -5%	15V/0.2~3.0A	±3%	5V/2.0~15A	±3%	3.3V/0.0~15A
31230	PPQ-1003D	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±6%	24V/0.0~1.0A	±6%	12V/0.2~3.0A	±3%	5V/2.0~15A	±3%	3.3V/0.0~15A



### 特点:

- 普遍AC被输入/全方位
- 固定激活PFC作用, PF>0.95
- 保护: 短路/OLP/OVP
- 冷却由自由空气对流
- 100% 全负荷留下消耗测试
- 固定的开关频率在 70KHz(Optional)
- 3 年保单

电压范围: 90~264VAC 127~370VDC

AC电流: 1.65A/115VAC 0.85A/230VAC



流入电流(max.): 冷启动 40A

漏电: <3.5mA/240VAC

运作的温度: -10~+60°C(参见减税的曲线为不同的模型)

安全标准: UL60950-1, TUV EN60950-1 Approved

承受电压: I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC

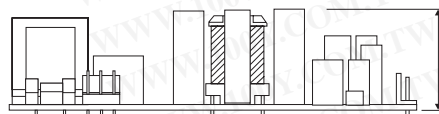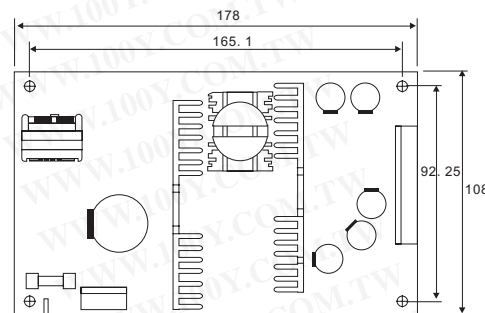

100Y 编号	厂商编号	制造厂商	说明	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current
31235	PPQ-100B	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±5%	-5V/0.0~1.0A	±5%	-12V/0.0~1.0A	±8%	12V/0.3~4.0A	±3%	5V/2.0~15A
31237	PPQ-100C	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±5%	-5V/0.0~1.0A	±5%	-15V/0.0~1.0A	-6%, +10%	15V/0.3~4.0A	±3%	5V/2.0~15A
31240	PPQ-100D	MEAN WELL	MEAN WELL_100W Quad Output with PFC Function	±5%	-12V/0.0~1.0A	±5%	12V/0.0~1.0A	±8%	24V/0.3~4.0A	±3%	5V/2.0~10A

### 特点:

- 普遍AC被输入/全方位
- PF>0.98@115VAC; >0.94@230VAC
- 保护: 短路/OLP/OVP
- 过温保护 (option)
- 认可: UL/CUL/TUV/CB/CE
- 自由空气冷却对流为 100W
- Forced-air冷却由固定DC 风扇为150W
- Ch4 极性可能被扭转为QP-100-3X/ QP-150-3X (option)
- 3 年保单

AC输入电压范围: 90~264VAC; 127~370VDC

DC 调整范围: CH1: -5~+10% 额定输出电压

(CH1&2 for QP-100/150-3 series)

过装载保护: CH1: 105~150% 打嗝声模式, 自动防御

Over voltage protection: 115%~135% for Ch1 or CH1&2

过电压保护: I/P-O/P: 3KVAC, I/P-FG: 1.5KVAC, 1minute

运作的温度: -10~60°C(参见减税的曲线为不同的模型)

安全标准: UL60950-1, TUV EN60950-1 approved

连接: 7.62mm盖子沥青接线盒



QP-100 Series



100Y 编号	厂商编号	制造厂商	说明	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current	Tol.(±)	Output Volt./Current
21087	QP-100-3A	MEAN WELL	MEAN WELL_100W PFC 功能四组交换式电供器	±5%	-5V/0~1A	±6%	12V/0.3~3A	±3%	3.3V/0~10A	±3%	5V/2~10A
21088	QP-100-3B	MEAN WELL	MEAN WELL_100W PFC 功能四组交换式电供器	±5%	-12V/0~1A	±6%	12V/0.3~3A	±3%	3.3V/0~10A	±3%	5V/0~10A
21089	QP-100-3C	MEAN WELL	MEAN WELL_100W PFC 功能四组交换式电供器	±5%	-15V/0~1A	+8,-6%	15V/0.3~2A	±3%	3.3V/0~10A	±3%	5V/2~10A
21090	QP-100-3D	MEAN WELL	MEAN WELL_100W PFC 功能四组交换式电供器	±5%	-12V/0~1A	±6%	24V/0.3~2A	±3%	3.3V/0~10A	±3%	5V/2~10A
21045	QP-100B	MEAN WELL	MEAN WELL_100W PFC 功能四组交换式电供器	±5%	-5V/0.0~1.0A	+10%,-6%	-12V/0.15~1.0A	±6%	12V/0.3~4.0A	±3%	5V/2.0~10A
16144	QP-100C	MEAN WELL	MEAN WELL_100W PFC 功能四组交换式电供器	±3%	5V/2.0~10A	+6%,-10%	15V/0.3~2.0A	±8%	-15V/0.15~1.0A	±5%	-5V/0.0~1.0A
21085	QP-100D	MEAN WELL	MEAN WELL_100W PFC 功能四组交换式电供器	±5%	-12V/01~A	±6%	24V/0.3~2A	±3%	12V/0~3A	±3%	5V/2~10A
21086	QP-100F	MEAN WELL	MEAN WELL_100W PFC 功能四组交换式电供器	±5%	-15V/0~1A	±6%	24V/0.3~2A	±3%	15V/0~3A	±3%	5V/2~10A

我们总是不断努力为你创造优质的服务以及热诚的帮助, 不论你在任何地方.

[Http://cn.100y.com.tw/](http://cn.100y.com.tw/)

横跨两岸的电子元件采购指南



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699

上海: 86-21-64605107

上海: 100y-1@163.com