

电源供应器+转换器+UPS


MOTIEN_直流转直流-双组电源转换器

详细产品规格 - 请点击 cn.100y.com.tw

100Y 编号	厂商编号	制造厂商	说明	DCVout	Current	DCVout	Current	Watts	Efficiency %	DCVin
40033	V6-1215D3P	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEL3-1223)	-15V	-100mA	+15V	+100mA	3W	78%	9-18V
40035	V6-2412D3P	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEL3-2422)	-12V	-125mA	+12V	+125mA	3W	80%	18-36V
40036	V6-2415D3P	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEL3-2423)	-15V	-100mA	+15V	+100mA	3W	80%	18-36V




- 特点**
- Wide 2:1 Input Range
 - Full SMD技术
 - 1500 Vdc Isolation
 - 短路保护
 - 效率高达 90%
 - -40~85°C 操作温度范围

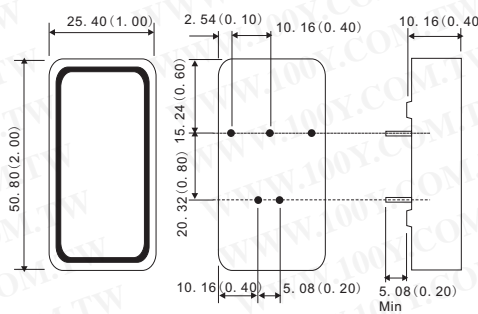

物理规格
 盒子材料: 镍上漆的铜
 基本材料: 环氧encapsulayed (UL94V-0 rated)
 重量: 30.0g
 直径: 2.00" x 1.00" x 0.40"
一般规格
 安全标准: IEC 60950-1:2001
环境规格
 操作温度: -40°C~85°C

100Y 编号	厂商编号	制造厂商	说明	DCVout	Current	DCVout	Current	Watts	Efficiency %	DCVin
39844	V7-1205D10	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 10-1221)	-5.0V	-1000mA	+5.0V	+1000mA	10W	83%	9-18V
39845	V7-1212D10	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 10-1222)	-12.0V	-416mA	+12.0V	+416mA	10W	85%	9-18V
39856	V7-1212D15	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 15-1222)	-12.0V	-625mA	+12.0V	+625mA	15W	85%	9-18V
39879	V7-1212D30L	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 25-1222)	-12.0V	-1250mA	+12.0V	+1250mA	30W	88%	9-18V
39846	V7-1215D10	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 10-1223)	-15.0V	-333mA	+15.0V	+333mA	10W	85%	9-18V
39858	V7-1215D15	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 15-1223)	-15.0V	-500mA	+15.0V	+500mA	15W	85%	9-18V
39881	V7-1215D30L	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 25-1223)	-15.0V	-1000mA	+15.0V	+1000mA	30W	88%	9-18V
39847	V7-2405D10	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 10-2421)	-5.0V	-1000mA	+5.0V	+1000mA	10W	84%	18-36V
39849	V7-2412D10	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 10-2422)	-12.0V	-416mA	+12.0V	+416mA	10W	85%	18-36V
39859	V7-2412D15	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 15-2422)	-12.0V	-625mA	+12.0V	+625mA	15W	86%	18-36V
39882	V7-2412D30L	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 25-2422)	-12.0V	-1250mA	+12.0V	+1250mA	30W	88%	18-36V
39850	V7-2415D10	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 10-2423)	-15.0V	-333mA	+15.0V	+333mA	10W	86%	18-36V
39860	V7-2415D15	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 15-2423)	-15.0V	-500mA	+15.0V	+500mA	10W	87%	18-36V
39883	V7-2415D30L	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 25-2423)	-15.0V	-1000mA	+15.0V	+1000mA	30W	88%	18-36V

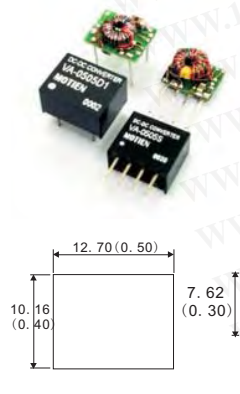

- 8 Pin DIL包装
- 低波纹和噪声
- 1000 Vdc 隔离
- 无规律
- 非导电性黑塑料盒
- MTBF>2 Mhours

输出规格
 电压准确性: ±3% Max.
 波纹 & 噪声 (at 20 Mhz BW): 100mVp-p. Max.
输入规格
 电压范围: ±10%
一般规格
 效率: 72%~82%
环境规格
 操作温度: -40°C~85°C



Pin #	STANDARD
1	-V Input
4	+V Input
5	+V1 output
6	-V1 output
7	+V2 output
8	-V2 output

100Y 编号	厂商编号	制造厂商	说明	DCVout	Current	DCVout	Current	Watts	Efficiency %	DCVin
39911	VA-0505D1	MOTIEN	DC/DC 双组电源转换器(=C&D_NME 0505 D)	-5.5V	-100mA	+5.5V	+100mA	1W	80%	5V
39912	VA-0515D1	MOTIEN	DC/DC 双组电源转换器(=C&D_NME 0515 D)	-15.15V	-34.14mA	+15.15V	+34.14mA	1W	80%	5V
39913	VA-1205D1	MOTIEN	DC/DC 双组电源转换器(=C&D_NME 1205 D)	-5.0V	-100mA	+5.0V	+100mA	1W	74%	12V
39914	VA-1212D1	MOTIEN	DC/DC 双组电源转换器(=C&D_NME 1212 D)	-12.0V	-50mA	+12.0V	+50mA	1W	82%	12V
39916	VA-1215D1	MOTIEN	DC/DC 双组电源转换器(=C&D_NME 1215 D)	-15.0V	-34mA	+15.0V	+34mA	1W	80%	12V




- Wide 2:1输入范围
- Full SMD 技术
- 1500 Vdc隔离高达 3500 Vdc 隔离
- 连续短路保护
- 效率高达 85%
- -40~85°C 操作温度范围

一般规格
 安全标准: IEC 60950-1:2001
环境规格
 操作温度: -40°C~85°C



物理规格
 重量: 17.0g
 直径: 1.28" x 0.84" x 0.41"
 1.25" x 0.8" x 0.4" (塑料盒)

输出规格
 电压准确性: ±1%
 波纹 & 噪声 (20 Mhz band width): 60mV pk-pk

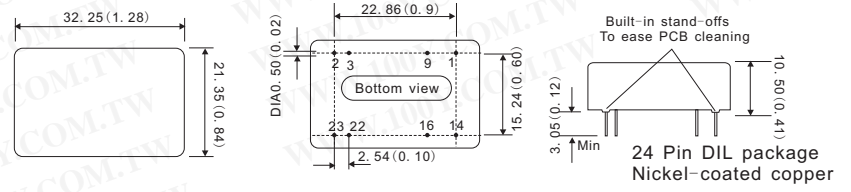

服务专线: 台湾: 886-3-5753170
 传 真: 台湾: 886-3-5753172
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
 深圳: 86-755-83640655
 深圳: 100y@163.com

上海: 86-21-34970699
 上海: 86-21-64605107
 上海: 100y-1@163.com