


电源供应器+转换器+UPS

MOTIEN_直流转直流-双组电源转换器

详细产品规格 - 请点击 cn.100y.com.tw

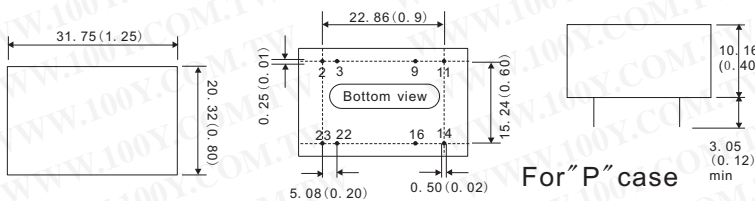

For "P" case

24 Pin DIL package
Non-conductive plastic

Pin number	Single	Dual
2	-V Input	-V Input
3	-V Input	-V Input
9	N. P.	Common
11	N. C.	-V output
14	+V output	+V output
16	-V output	Common
22	+V Input	+V Input
23	+V Input	+V Input

100Y 编号	厂商编号	制造厂商	说明	DCVout	Current	DCVout	Current	Watts	Efficiency %	DCVin
39802	VD-1205D3P	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN3-1221)	-5.0V	-300mA	+5.0V	+300mA	3W	76%	9-18V
39786	VD-1205D5	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN5-1221)	-5.0V	-500mA	+5.0V	+500mA	5W	77%	9-18V
39803	VD-1212D3P	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN3-1222)	-12.0V	-125mA	+12.0V	+125mA	3W	80%	9-18V
39787	VD-1212D6	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN5-1222)	-12V	-250mA	+12V	+250mA	6W	80%	9-18V
39804	VD-1215D3P	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN3-1223)	-15V	-100mA	+15V	+100mA	3W	80%	9-18V
39789	VD-1215D6	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN5-1223)	-15V	-200mA	+15V	+200mA	6W	78%	9-18V
39805	VD-2405D3P	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN3-2421)	-5.0V	-300mA	+5.0V	+300mA	3W	76%	18-36V
39791	VD-2405D5	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN5-2421)	-5.0V	-500mA	+5.0V	+500mA	5W	78%	18-36V
39806	VD-2412D3P	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN3-2422)	-12.0V	-125mA	+12.0V	+125mA	3W	82%	18-36V
39792	VD-2412D6	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN5-2422)	-12.0V	-250mA	+12.0V	+250mA	6W	80%	18-36V
39807	VD-2415D3P	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN3-2423)	-15.0V	-100mA	+15.0V	+100mA	3W	82%	18-36V
39793	VD-2415D6	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN5-2423)	-15V	-200mA	+15V	+200mA	6W	80%	18-36V





- Wide 4:1 输入范围
- Full SMD 技术
- 1500 Vdc 隔离
- Up to 3500 Vdc 隔离
- 连续短路保护
- 效率高达 85%
- -40~85°C 操作温度范围

输出范围
电压准确性: ±1%
波纹 & 噪声 (20 Mhz band width): 60mV pk-pk

物理规格
重量: 17.0g
直径: 1.25" x 0.8" x 0.41"

一般规格
安全标准: IEC 60950-1: 2001
环境规格
操作温度: -40°C~85°C

Pin number	Single	Dual
2	-V Input	-V Input
3	-V Input	-V Input
9	N. P.	Common
11	N. C.	-V output
14	-V output	+V output
16	+V Input	Common
22	+V Input	+V Input
23	+V Input	+V Input

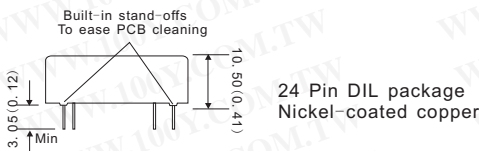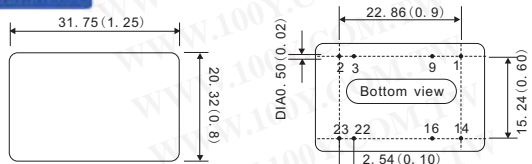

24 Pin DIL package
Nickel-coated copper



100Y 编号	厂商编号	制造厂商	说明	DCVout	Current	DCVout	Current	Watts	Efficiency %	DCVin
39818	VK-2412D4	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 4-2422)	-12V	-167mA	+12V	+167mA	4W	82%	9-36V
39822	VK-2412D6	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 6-2422)	-12V	-250mA	+12V	+250mA	6W	84%	9-36V
39819	VK-2415D4	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 4-2423)	-15V	-134mA	+15V	+134mA	4W	80%	9-36V
39823	VK-2415D6	MOTIEN	DC/DC 双组电源转换器(=TRACO_TEN 6-2423)	-15V	-200mA	+15Vdc	+200mA	6W	80%	9-36V

直流转直流-双组电源转换器

详细产品规格 - 请点击 cn.100y.com.tw



- 特点:
- 2:1 wide输入范围
 - 1000 VDC I/O隔离
 - Input PI network filter
 - 保护: 短路/过载/
 - 冷却由自由空气对流
 - 100% 全负荷留下消耗测试
 - 低成本/高可靠性
 - 1年保单



电压凝固点准确性: 2% (max.)
线变功率: 0.5% (max.)
负载变功率: 0.5% (max.) @20~100% load
效率: 76% (typical)
短路保护: 连续, 自我修复
过载保护: 150~250%, 自我修复

I/O 隔离电压: 1000VDC (min.)
I/O 隔离电阻: 100MΩ (min.) @500VDC
运行温度: -25°C to +60°C (no derating), +71°C @80% load
存储温度: -25°C to +105°C
温度系数: ±0.03%/°C (max.)
隔离电容: 80pF (Max.)

Pin no.	Output	
	Single	Dual
2&3	-Vin	-Vin
9	N. C.	COM
11	N. C.	-Vout
14	+Vout	+Vout
16	-Vout	COM
22&23	+Vin	+Vin



服务专线: 台湾: 886-3-5753170
传 真: 台湾: 886-3-5753172
E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
深圳: 86-755-83640655
深圳: 100y@163.com

上海: 86-21-34970699
上海: 86-21-64605107
上海: 100y-1@163.com