



继电器+电磁阀

RAYEX_PCB继电器

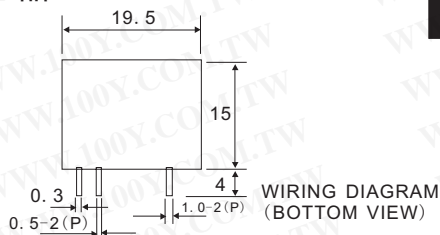




详细产品规格 - 请点击 cn.100y.com.tw

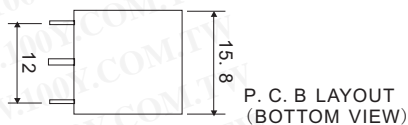

100Y 编号	厂商编号	制造厂商	说明	Outline L*W*H	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Type
8193	LEG-12	RAYEX	PCB 继电器	19.5*15.8*15	1PDT	120VAC/24VDC/10A	12Vdc	UL,TUV	LEG
2294	LEG-24	RAYEX	PCB 继电器	19.5*15.8*15	1PDT	120VAC/24VDC/10A	24Vdc	UL,TUV	LEG
10355	LEG-3	RAYEX	PCB 继电器	19.5*15.8*15	1PDT	120VAC/24VDC/10A	3Vdc	UL,TUV	LEG
3604	LEG-5	RAYEX	PCB 继电器	19.5*15.8*15	1PDT	120VAC/24VDC/10A	5Vdc	UL,TUV	LEG



- 特点:**
- 高敏感型
 - 电介质强度 AC 5,000V
 - 8mm 绝缘材料距离
 - 使用在家器具, 微波炉, 空调, 音响器材, 温度调解器

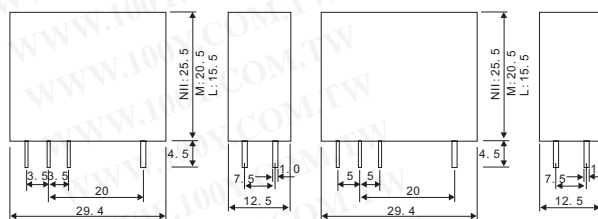

温度范围: -40°C~+80°C

重量: Standard Type : 17 grams, M Type : 15 grams, L Type : 12 grams

一般数据


绝缘抗阻: 1,000 MW Min. (DC 500V)
 电介质强度: 1,000 VAC, 50/60Hz between contact.
 5,000 VAC, 50/60Hz between all elements.
 触点材质: Silver- Cadmium Oxide as standard.
 触点电阻: 100 milliohms max. (initial value)
 振动电阻: Malfunction: 10 to 55 Hz. at Double Amplitude of 1.5 mm
 Destructive: 10 to 55 Hz. at Double Amplitude of 1.5 mm

动作时间: 15 ms max.
释放时间: 10 ms max.

100Y 编号	厂商编号	制造厂商	说明	Outline L*W*H	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Type
2276	LM1-12D	RAYEX	PCB 功率继电器	29*12.5*25.5	1PDT	10A 240Vac/ 10A 30Vdc	12Vdc	UL, CUL	LM1
2277	LM1-24D	RAYEX	PCB 功率继电器	29*12.5*25.5	1PDT	10A 240Vac/ 10A 30Vdc	24Vdc	UL, CUL	LM1
2902	LM1-5D	RAYEX	PCB 功率继电器	29*12.5*25.5	1PDT	10A 240Vac/ 10A 30Vdc	5Vdc	UL, CUL	LM1
2903	LM2-05D	RAYEX	PCB 功率继电器	29*12.5*25.5	2PDT	5A 250Vac/ 10A 30Vdc	5Vdc	UL,CUL	LM2
2272	LM2-12D	RAYEX	PCB 功率继电器	29*12.5*25.5	2PDT	5A 240Vac/ 5A 30Vdc	12Vdc	UL, CUL	LM2
2273	LM2-24D	RAYEX	PCB 功率继电器	29*12.5*25.5	2PDT	5A 240Vac/ 5A 30Vdc	24Vdc	UL, CUL	LM2
3376	LM2-48D	RAYEX	PCB 功率继电器	29*12.5*25.5	2PDT	5A 240Vac/ 5A 30Vdc	48Vdc	UL, CUL	LM2



- 特点:**
- 适当的塑料材料的就业向高温和应用各样化工处理
UL, CUL, TUV approved
 - 电力消耗: 0.33W~0.45W
 - 使用在烹调器具、空调、音响器材、家用电器、汽车
 - 控制单元等。

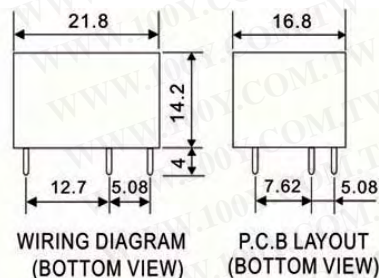

动作时间: 10 ms max.
 释放时间: 10 ms max.
 温度范围: -20°C~+60°C
 理想寿命: With operation rate 30/min.

Mechanical - 10,000,000 operations min.
 Electrical - 100,000 operations min. at rated load.

LT Series


一般数据
 绝缘抗阻: 100 MW Min. (DC 500V)
 电介质强度: 750 VAC, 50/60Hz between contact.
 1,500 VAC, 50/60Hz between all elements.
 触点材质: Silver- Cadmium Oxide as standard.
 触点电阻: 100 milliohms max. (initial value)
 震动电阻: Malfunction: 10G(11ms); Destructive: 100G(6ms)
 振动电阻: Malfunction: 10 to 55 Hz. at Double Amplitude of 1.5 mm
 Destructive: 10 to 55 Hz. at Double Amplitude of 1.5 mm

重量: 10 grams

100Y 编号	厂商编号	制造厂商	说明	Outline L*W*H	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Type
2268	LT-12G	RAYEX	PCB 继电器	21.8*16.8*14.2	1PDT	10A 120Vac/ 10A 24Vdc	12Vdc	TUV	LT
11646	LT-24G	RAYEX	PCB 继电器	21.8*16.8*14.2	1PDT	10A 120Vac/ 5A 240Vac	24Vdc	TUV	LT



- 特点:**
- 微型中转
 - 标准型和高敏感性类型可利用。
 - UL and CUL safety approval
 - 使用在微处理器控制、家庭安全, 和外部设备



服务专线: 台湾: 886-3-5753170
 传 真: 台湾: 886-3-5753172
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
 深圳: 86-755-83640655
 深圳: 100y@163.com

上海: 86-21-34970699
 上海: 86-21-64605107
 上海: 100y-1@163.com