


继电器+电磁阀

NAIS_PCB继电器


详细产品规格 - 请点击 cn.100y.com.tw



规格: Characteristics

初绝缘电阻*1	Min. 1,000MΩ (at 500V DC)	
冲击电阻	Functional*5	Min. 490m/s ² {50G}
	Destructive*6	Min. 980m/s ² {100G}
振动电阻	Functional*7	176.4m/s ² {18G}, 10 to 55Hz at double amplitude of 3mm
	Destructive	294m/s ² {30G}, 10 to 55Hz at double amplitude of 5mm
净重	Approx. 2g .071 oz	

100Y 编号	厂商编号	制造厂商	说明	Coil Voltage	Type
35806	TF2-24V	NAIS	SMALL POLARIZED RELAY WITH HIGH SENSITIVITY	24V	TF



- 特点:
- 低侧面 4 mm .157寸高
 - 高触点电容: 2 A
 - 浪涌承受电压在触点和线圈之间: 2,500 V (Telcordia)



规格: Contacts

安排	1 Form C	
最大初触点电阻 (By voltage drop 6 V DC 1 A)	50 mΩ	
触点材料	Gold-clad silver	
规定值	一般开关电容 (resistive load)	2 A 30 V DC
	最大开关功率 (resistive load)	60 W
	最大开关电压	220 V DC
	最大开关电流	2 A
	最小开关电容 (Reference value)*1	10 μA 10 mV DC

Characteristics


初绝缘电阻*1	Min. 1,000 MΩ (at 500 V DC)	
毛坯件电压	开放触点之间	750 Vrms for 1 min. (Detection current: 10 mA)
	触点和线圈之间	1,500 Vrms for 1 min. (Detection current: 10 mA)
冲击电阻	Functional*5	Min. 750 m/s ² {75 G}
	Destructive*6	Min. 1,000 m/s ² {100 G}
振动电阻	Functional*7	196 m/s ² {20G}, 10 to 55 Hz at double amplitude of 3.3 mm
	Destructive	294 m/s ² {30G}, 10 to 55 Hz at double amplitude of 5 mm
净重	Approx. 1 g .035 oz.	

100Y 编号	厂商编号	制造厂商	说明	Coil Voltage	Type
46917	TK1-L2-H-5V	NAIS	NAIS_继电器 5V	5V	TK




- 特点:
- 小规格个人计算机板架置
 - 小头可能成为更高的密度架置
 - 高灵敏度: 140 兆一般工作功率 (single sidestable 3-12 V type)
 - 浪涌承受电压: 1500 V FCC Part 68
 - 密封型允许自动清洁
 - 可适用闭塞型


Schematic (Bottom view)

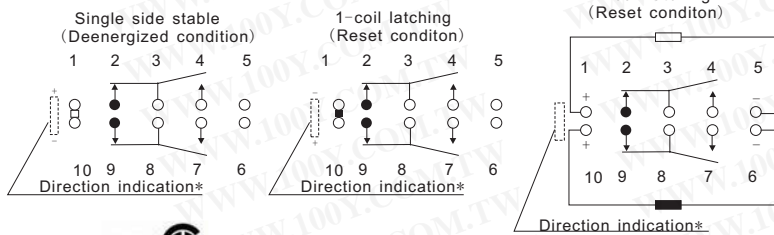

Standard PC board terminal

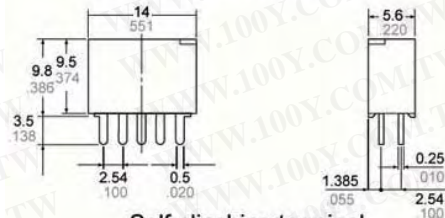

Self-clinching terminal

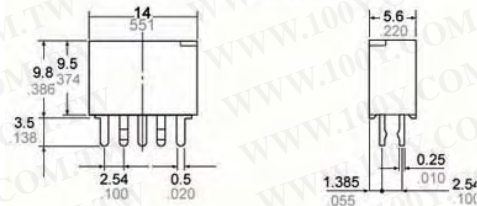

规格: Contact

安排	2 Form C	
最大初触点电阻 (By voltage drop 6 V DC 1 A)	60 mΩ	
触点材料	Gold-clad silver	
规定值	一般开关电容 (resistive load)	1 A 30 V DC, 0.5 A 125 V AC
	最大开关功率 (resistive load)	30 W, 62.5 VA
	最大开关电压	110 V DC, 125 V AC
	最大开关电流	1 A
	最小开关电容*1	10 μA 10 mV DC

Characteristics

初绝缘电阻*1	Min. 1,000 MΩ (at 500 V DC)	
冲击电阻	Functional*5	Min. 490 m/s ² {50G}
	Destructive*6	Min. 980 m/s ² {100G}
振动电阻	Functional*7	176.4 m/s ² {18G}, 10 to 55 Hz at double amplitude of 3 mm
	Destructive	294 m/s ² {30G}, 10 to 55 Hz at double amplitude of 5 mm
净重	Approx. 1.5 g .053 oz	

General tolerance: ±0.3 ±0.12

100Y 编号	厂商编号	制造厂商	说明	Contact Arrangement	Contact Rating	Coil Voltage	Outline L*W*H	Type
28313	TN2-12V	NAIS	NAIS_Slim Polarized Relay	2 Form C	1A/30Vdc, 0.5A/125Vac	12Vdc	14*5.6*9.5mm	TN-Relays
36745	TN2-24V	NAIS	SLIM POLARIZED RELAY	DPDT	30Vdc/125Vac	24Vdc	14*5.6*9.8	TN Series
36732	TN2-3V	NAIS	SLIM POLARIZED RELAY	DPDT	30Vdc/125Vac	3Vdc	14*5.6*9.8	TN Series
36739	TN2-4.5V	NAIS	SLIM POLARIZED RELAY	DPDT	30Vdc/125Vac	4.5Vdc	14*5.6*9.8	TN Series
36746	TN2-48V	NAIS	SLIM POLARIZED RELAY	DPDT	30Vdc/125Vac	48Vdc	14*5.6*9.8	TN Series
41212	TN2-5V	NAIS	SLIM POLARIZED RELAY	DPDT	30Vdc/125Vac	5Vdc	14*5.6*9.8	TN Series
20581	TN2-5V	NAIS	SLIM POLARIZED RELAY	DPDT	30Vdc/125Vac	5Vdc	14*5.6*9.8	TN Series



服务专线: 台湾: 886-3-5753170
 传 真: 台湾: 886-3-5753172
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
 深圳: 86-755-83640655
 深圳: 100y@163.com

上海: 86-21-34123367 & 54151736 29-113
 上海: 86-21-64605107
 上海: 100y-1@163.com