


继电器+电磁阀

NAIS_PCB继电器

详细产品规格 - 请点击 cn.100y.com.tw



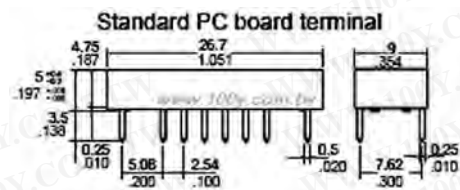


Schematic (Bottom view)

• Single side stable (Deenergized condition)

• 1-coil latching (Reset condition)

• 2-coil latching (Reset condition)



*Orientation stripe typical-located on top of relay



特点:

- 高灵敏度:
 - 2 Form C: 140 mW power consumption (single side stable type)
 - 4 Form C: 280 mW power consumption (single side stable type)
- 浪涌承受电压: 1500 V FCC Part 68
- 密封外壳可以自动清洁

- 也可闭塞末端
- M.B.B. contact types available

规格: Contact

安排	Standard (B.B.M) type	
最大初触点电阻 (By voltage drop 6 V DC 1A)	4 Form C	
触点材料	50 mΩ	
规定值	Gold-clad silver	
	一般开关电容 (resistive load)	1 A 30 V DC 0.5 A 125 V AC
	最大开关功率 (resistive load)	30 W, 62.5 VA
	最大开关电压	110 V DC, 125 V AC
	最大开关电流	1 A
最小开关电容 ¹	10 μA 10 mV DC	

Characteristics

初绝缘电阻 ¹	Standard (B.B.M) type	
冲击电阻	Functional ⁵	Min. 1,000 MΩ (at 500 V DC)
	Destructive ⁶	Min. 490 m/s ² {50G}
振动电阻	Functional ⁷	176.4 m/s ² {18G}, 10 to 55 Hz at double amplitude of 3 mm
	Destructive	294 m/s ² {30G}, 10 to 55 Hz at double amplitude of 5 mm
净重	4 Form C:	Approx. 3 g .106 oz.

100Y 编号	厂商编号	制造厂商	说明	Contact Rating	Coil Voltage	Outline L*W*H	Type
36692	TQ4-12V	NAIS	4 Form C 继电器	30VDC/1A	12VDC	26.7*9*5	TQ4
36695	TQ4-24V	NAIS	4 Form C PCB 继电器	30VDC/1A	24VDC	26.7*9*5	TQ4
36689	TQ4-3V	NAIS	4 Form C PCB 继电器	30VDC/1A	3VDC	26.7*9*5	TQ4
36688	TQ4-4.5V	NAIS	4 Form C PCB 继电器	30VDC/1A	4.5VDC	26.7*9*5	TQ4
36698	TQ4-48V	NAIS	4 Form C PCB	30VDC/1A	48VDC	26.7*9*5	TQ4
22000	TQ4-5V	NAIS	4Form C PCB 继电器	30VDC/1A	5VDC	26.7*9*5	TQ4
36687	TQ4-6V	NAIS	4 Form C PCB 继电器	30VDC/1A	6VDC	26.7*9*5	TQ4
36686	TQ4-9V	NAIS	4 Form C PCB 继电器	30VDC/1A	9VDC	26.7*9*5	TQ4







Coil latching type

特点:

- 在线圈和触点之间降低电压: 2,000 V
- 浪涌承受电压在触点和线圈之间: 2,500 V
- 高触点电容: 2 A 30 V DC
- 表面安装也可适用



Single side stable and 1 coil latching type

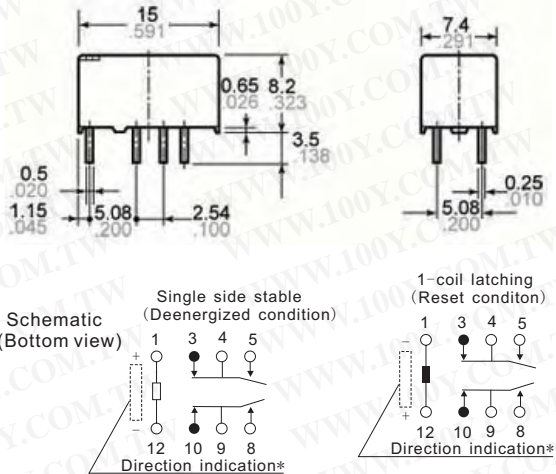

规格:

Contact

安排	2 Form C	
最大初触点电阻 (By voltage drop 6 V DC 1A)	100 mΩ	
触点材料	Gold-clad silver alloy	
规定值	一般开关电容 (resistive load)	2 A 30 V DC
	最大开关功率 (resistive load)	60 W
	最大开关电压	220 V DC
	最大开关电流	2 A
	最小开关电容 ¹	10 μA 10 mV DC

Characteristics

初绝缘电阻 ¹	Min. 1,000 MΩ (at 500 V DC)	
冲击电阻	Functional ⁵	Min. 750 m/s ² {75 G}
	Destructive ⁶	Min. 1,000 m/s ² {100 G}
振动电阻	Functional ⁷	196 m/s ² {20 G}, 10 to 55 Hz at double amplitude of 3.3 mm
	Destructive	294 m/s ² {30G}, 10 to 55 Hz at double amplitude of 5 mm
净重	Approx. 2 g .071 oz	

*Orientation stripe located on top of relay.

100Y 编号	厂商编号	制造厂商	说明	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Outline L*W*H	Type
36679	TX2-DC1.5V	NAIS	PCB Relay	2 Form C	2A/30VDC 0.3A/110VAC	1.5VDC	UL, CSA	15*7.4*8.2mm	TX2
14543	TX2-DC12V	NAIS	PCB Relay	2 Form C	2A/30VDC 0.3A/110VAC	12VDC	UL, CSA	15*7.4*8.2mm	TX2
36685	TX2-DC24V	NAIS	PCB Relay	2 Form C	2A/30VDC 0.3A/110VAC	24VDC	UL, CSA	15*7.4*8.2mm	TX2
36680	TX2-DC3V	NAIS	PCB Relay	2 Form C	2A/30VDC 0.3A/110VAC	3VDC	UL, CSA	15*7.4*8.2mm	TX2
36681	TX2-DC4.5V	NAIS	PCB Relay	2 Form C	2A/30VDC 0.3A/110VAC	4.5VDC	UL, CSA	15*7.4*8.2mm	TX2
36682	TX2-DC5V	NAIS	PCB Relay	2 Form C	2A/30VDC 0.3A/110VAC	5VDC	UL, CSA	15*7.4*8.2mm	TX2
36683	TX2-DC6V	NAIS	PCB Relay	2 Form C	2A/30VDC 0.3A/110VAC	6VDC	UL, CSA	15*7.4*8.2mm	TX2
36684	TX2-DC9V	NAIS	PCB Relay	2 Form C	2A/30VDC 0.3A/110VAC	9VDC	UL, CSA	15*7.4*8.2mm	TX2



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34123367 & 54151736

上海: 86-21-64605107

上海: 100y-1@163.com