

继电器+电磁阀

OEG_PCB继电器

详细产品规格 - 请点击 cn.100y.com.tw


100Y 编号	厂商编号	制造厂商	说明	Type	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Outline L*W*H
42902	OZ-SS-105L	OEG	OEG_PCB 继电器	OZ, 1 pole	1 Form C, SPDT	16A 240VAC	5VDC	UL, CSA, TUV	29.2*12.8*20.6mm
23971	OZ-SS-112LM1	OEG	OEG_PCB 继电器	OZ, 1 pole	1 Form A, SPST-NO	16A 240VAC	12VDC	UL, CSA, TUV	29.2*12.8*20.6mm
40398	OZ-SS-124L	OEG	OEG_PCB 继电器	OZ, 1 pole	1 Form C, SPDT	16A 240VAC	24VDC	UL, CSA, TUV	29.2*12.8*20.6mm
23974	OZ-SS-124LM1	OEG	OEG_PCB 继电器	OZ, 1 pole	1 Form A, SPST-NO	16A 240VAC	24VDC	UL, CSA, TUV	29.2*12.8*20.6mm




特点:

- Meet UL 508, CSA, TUV requirements.
- 1 Form A 触点排列
- 快连接末端和个人计算机板类型。
- Meet 5,000V 电介质电压在线圈和触点之间
- Meet 10,000V 浪涌电压在线圈和触点之间 (1.2/50 μs)

PCF (Top View)



(Bottom View)

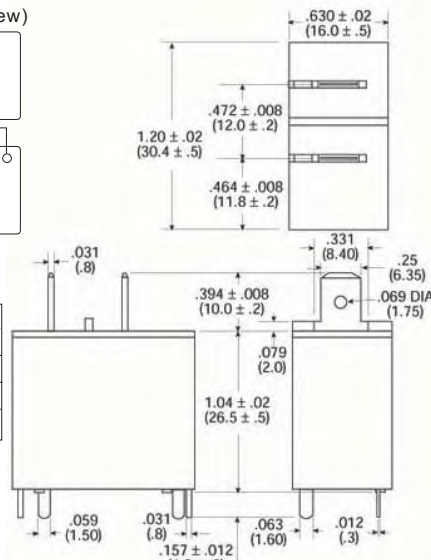

触点数据@	20°C
安排:	1 Form A
材料:	AgSnO
最大开关率:	300 ops./min. (no load). 30 ops./min. (rated load).
预测机械寿命:	10 million operations (no load).
预测电子寿命:	100,000 operations (rated load).
最小装载:	100mA @5VDC.
初触点电阻:	100 milliohms @ 1A,6VDC.

- UL File No. E82292
- CSA File No. LR48471
- TUV File No. R85447

线圈数据

电压:	6 to 24VDC.
一般功率:	900 mW.
线圈温度上升:	55°C max., at rated coil voltage.
最大线圈功率:	130% of nominal.
使用率:	Continuous.

环境数据

温度范围:	Operating:	30°C to +55°C
冲击	Mechanical:	10 to 55 Hz., 1.5mm double amplitude
	Operational:	10 to 55 Hz., 1.5mm double amplitude.
振动	Mechanical:	1,000m/s ² (100G approximately).
	Operational:	100m/s ² (10G approximately).
工作湿度:		20 to 85% RH. (Non-condensing).

初绝缘电阻 在相互绝缘元素之间:	1,000M ohms min. @ 500VDC.
---------------------	----------------------------

机械数据:

末端:	PCF:	印制电路末端与快连接末端
	PCFN:	Printed circuit terminals.
盒子 (94V-0 燃烧性规定值):	PCF / PCFN:	Vented (Flux-tight) plastic cover.
重量:		约0.99 oz (28g)

100Y 编号	厂商编号	制造厂商	说明	Type	Contact Arrangement	Coil Voltage	Recognized Safety	Outline L*W*H
47065	PCF-112D2M	OEG	OEG_PCB 继电器	PCF, 1 pole	1 Form A, SPST-NO	12VDC	UL, CSA, TUV	30.4*16*26.5





特点:

- 1 Form A (SPST-NO) or 1 Form C (SPDT) contact arrangements.
- 5 or 10A ratings. • Compact size 20L x 10W x 15.2H (mm).
- 高浪涌电压为f 8000V.
- 无锡触点.
- 灵敏 (200mW) 线圈可适用于1 Form A types.
- UL, CSA, VDE 认证

- UL File No. E82292
- CSA File No. LR48471
- VDE File No. 119568

Wiring Diagram (Bottom View)

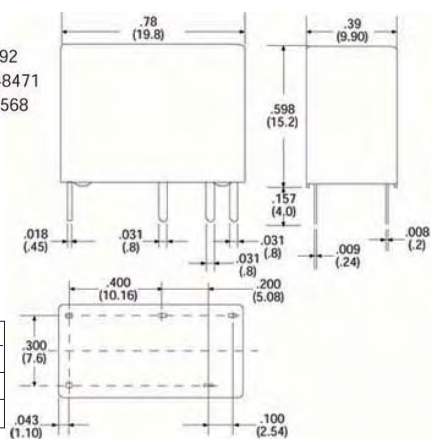

触点数据@	20°C
安排:	1 Form A (SPST-NO) and 1 Form C (SPDT).
材料:	AgSnO
最大开关率:	300 ops./min. (no load). 20ops./min. (rated load).
预测机械寿命:	5 million operations (no load).
预测电子寿命:	100,000 operations (rated load).
最小装载:	100mA @5VDC.
初触点电阻:	100 milliohms @ 1A,6VDC.

线圈数据

电压:	5 to 48VDC.
一般功率:	200mW or 400mW.
最大线圈功率:	130% of nominal.
使用率:	Continuous.

环境数据

温度范围:	Operating:	Models with Class F insulation: -30°C to +85°C.
冲击	Mechanical:	10 to 55 Hz., 1.5mm double amplitude
	Operational:	10 to 55 Hz., 1.5mm double amplitude.
振动	Mechanical:	1,000m/s ² (100G approximately).
	Operational:	100m/s ² (10G approximately).
工作湿度:		20 to 85% RH. (Non-condensing).

初绝缘电阻 在相互绝缘元素之间:	1,000M ohms min. @ 500VDC.
---------------------	----------------------------

机械数据:	
末端:	Printed circuit terminals.
重量:	约0.25 oz (7g)

100Y 编号	厂商编号	制造厂商	说明	Type	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Outline L*W*H
47044	PCH-105D2H	OEG	OEG_PCB 继电器	PCH, 1 pole	1 Form C (SPDT)	5A	5VDC	UL, CSA, VDE	20.00 x 10.00 x 15.2 0
47029	PCH-112D2H	OEG	OEG_PCB 继电器	PCH, 1 pole	1 Form C (SPDT)	5A	12VDC	UL, CSA, VDE	20.00 x 10.00 x 15.20
47045	PCH-124D2H	OEG	OEG_PCB 继电器	PCH, 1 pole	1 Form C (SPDT)	5A	24VDC	UL, CSA, VDE	20.00 x 10.00 x 15.20



服务专线: 台湾: 886-3-5753170
 传 真: 台湾: 886-3-5753172
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
 深圳: 86-755-83640655
 深圳: 100y@163.com

上海: 86-21-34123367 & 54151736 29-118
 上海: 86-21-64605107
 上海: 100y-1@163.com