

继电器+电磁阀

表面型AC驱动/AC负载固态继电器

详细产品规格 - 请点击 cn.100y.com.tw




规格:


Model No.	Control voltage range	Must turn off voltage	Input Impedance	Max load current	Load voltage range	Min blocking voltage	Max off-state leakage	Frequency range
KL40C-25AX	50-250 VAC	MAX10VAC	1.5Kohm	25A	48-480VAC	1200VAC	15 mA	47-70HZ

Model NO.	Isolation Impedence	Dielectric strength input-output	Dielectric strength input output-case	Turn-on time	Turn-off time	Capacitance in-out	Weight (g)
KL40C-25AX	10 ⁹ ohm	4000 VACrms	2500 VACrms	LESS 2 mSec	LESS 1/2 AC cycle	LESS 15 PF	95g

概述直径 (Unit: mm)

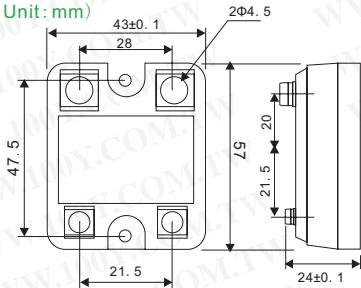

等效电路

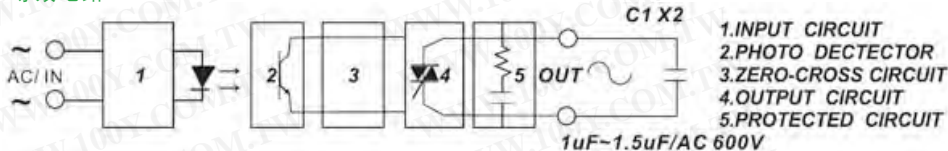


100Y 编号	厂商编号	制造厂商	说明	Vin 驱动电压	Irms 负载电流	Vrms 负载电压	Switching Type
13689	KL40C25AX	KYOTTO	固态继电器	80-280VAC	25A	48-480VAC	Zero-Cross



规格:


Model No.	Control Impedance	Must turn off voltage	Input Impedance	Max load current	Load voltage range	Min blocking voltage	Max off-state leakage	Frequency range
KR2010AX	VRO~500KΩ	MAX10VAC	1.5Kohm	10A	24-280VAC	600VAC	LESS 5 mA	47-70HZ
KR2040AX	VRO~500KΩ	MAX10VAC	1.5Kohm	40A	24-280VAC	600VAC	LESS 5 mA	47-70HZ

Model NO.	Isolation Impedence	Dielectric strength input-output	Dielectric strength input output-case	Turn-on time	Turn-off time	Capacitance in-out	Weight (g)
KR2010AX	10 ⁹ ohm	4000 VACrms	2500 VACrms	LESS 2 mSec	LESS 1/2 AC cycle	LESS 15 PF	92g
KR2040AX	10 ⁹ ohm	4000 VACrms	2500 VACrms	LESS 2 mSec	LESS 1/2 AC cycle	LESS 15 PF	95g

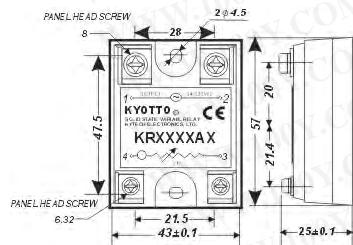


OUTLINE DIMENSIONS (Unit: mm)

EQUIVALENT CIRCUIT

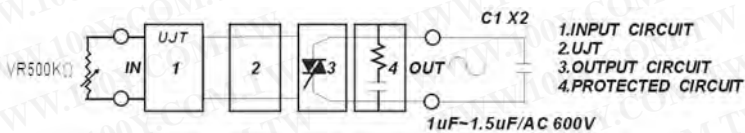

100Y 编号	厂商编号	制造厂商	说明	Vin 驱动电压	Irms 负载电流	Vrms 负载电压
46351	KR2010AX	KYOTTO	固态继电器		10A	24-280VAC
24918	KR2040AX	KYOTTO	固态继电器	250K ohm	40A	24-280VAC

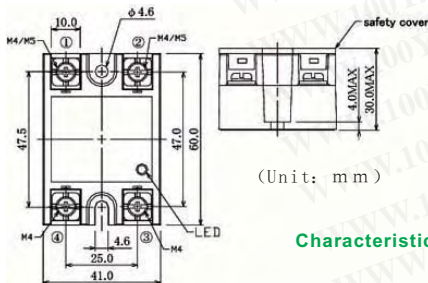

Characteristics

项目	S3C-225ADV	S3C-245ADV
输入电压范围	AC 85 ~ 264Vrms	
负载电压范围	AC 85 ~ 264Vrms	
漏电状态	12mA and below (Vo=200V)	
在电压降落状态	1.5Vrms and below	
最小负载电流	100mA	
零交叉作用	Built-in	
国际安全标准	UL、c-UL、VDE application is scheduled	

特点:

- 1. AC 输入类型增加来S3C 系列项目排列 可应用于操作两个以AC100V/200V 输入信号
- 2. 共同维度以直流输入类型 同样形式和维度以直流输入键入并且可附上小尺寸盘区
- 3. 安全特点 变阻器和CR有效地吸收末端安全外 套防止电击的外部浪涌
- 4. 操作指示灯 LED 显示表明正常运行
- 5. 国际安全标准 UL/c-UL/VDE应用预定

100Y 编号	厂商编号	制造厂商	说明	Vin 驱动电压	Irms 负载电流	Vrms 负载电压	Switching Type
37228	S3C-225ADV	JEL	JEL 25A AC 负载固态继电器	AC85-264V	15A	AC85-264V	Zero-cross-circuit
37225	S3C-245ADV	JEL	JEL AC 负载固态继电器	AC85-264V	45A	AC85-264V	Zero-cross-circuit



服务专线: 台湾: 886-3-5753170
 传 真: 台湾: 886-3-5753172
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
 深圳: 86-755-83640655
 深圳: 100y@163.com

上海: 86-21-34123367 & 54151736 29-145
 上海: 86-21-64605107
 上海: 100y-1@163.com