
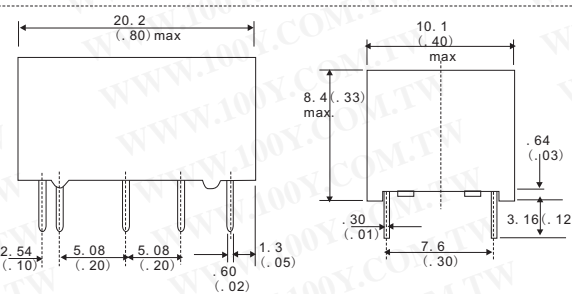
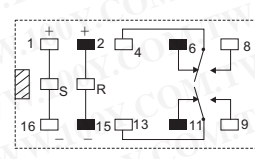


# 继电器+电磁阀


## OMRON\_PCB继电器

详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)

100Y 编号	厂商编号	制造厂商	说明	Outline L*W*H	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Type
37204	G6A-274P-DC5V	OMRON	OMRON 1A 5V 电路板用 G6A 微型继电器	10.1*20.2*8.4	2 FROM C	0.3A 125VAC/1A 30VDC	5V	UL,CSA ,FCC	G6A
16195	G6A-274P-ST-US-DC12V	OMRON	PCB 继电器	20.2*10.1*8.4	2C	0.6A/125VAC, 2A/30VDC	DC12V	UL,CSA	G6A-274P-ST-US
12350	G6A-274P-ST-US-DC24V	OMRON	PCB 继电器	20.2*10.1*8.4	2c	0.6A/125VAC, 2A/30VDC	DC24V	UL,CSA	G6A-274P-ST-US
16194	G6A-274P-ST-US-DC5V	OMRON	PCB 继电器	20.2*10.1*8.4	2c	0.6A/125VAC, 2A/30VDC	DC5V	UL,CSA	G6A-274P-ST-US
39277	G6A-474P-ST-US-DC24V	OMRON	PCB 继电器			0.6A/125VAC, 2A/30VDC	DC24V	UL,CSA	G6A-474P-ST-US


Terminal arrangement/  
Internal connections  
(Bottom view)



100Y 编号	厂商编号	制造厂商	说明	Outline L*W*H	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Type
16888	G6AK-234P-DC12V	OMRON	PCB 继电器	20.2*10.1*8.4	DPDT	2A	DC12V	UL,CSA	G6AK-234P



- 高敏感性可能被数字电路驱动。
- 水平的设计允许用于 1/2-inch PCB racks.
- 冲动承受电压为 FCC Part 68 requirements.
- 中转能并排镶嵌于低磁性漏出。
- 利用唯一和双重绕并且锁上中转。
- 特殊模型可利用为低热电力。

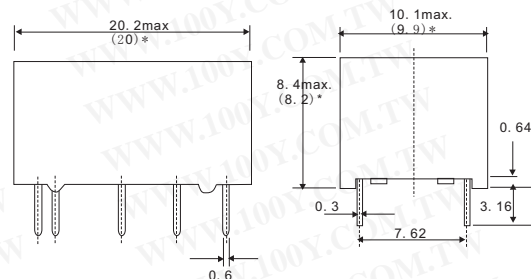

**特点:**

触点电阻: 50 mΩ max.

反跳时间: Operate: mean value: approx. 0.5 ms

Release: mean value: approx. 0.5 ms


绝缘阻抗: 1,000 MΩmin. (at 500 VDC);除重置

冲击承受电压: 1,500 V (10 x 160 μs) (conforms to FCC Part 68)

环境温度: Operating: -40°C to 70°C (with no icing)



Terminal arrangement/  
Internal connections  
(Bottom view)



100Y 编号	厂商编号	制造厂商	说明	Outline L*W*H	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Type
36570	G6AK-234P-ST-US-9V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	9VDC	UL,CSA	G6AK-234P-ST-US
35916	G6AK-234P-ST-US-DC12V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	12VDC	UL,CSA	G6AK-234P-ST-US
36571	G6AK-234P-ST-US-DC24V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	24VDC	UL,CSA	G6AK-234P-ST-US
36564	G6AK-234P-ST-US-DC3V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	3VDC	UL,CSA	G6AK-234P-ST-US
36565	G6AK-234P-ST-US-DC4.5V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	4.5VDC	UL,CSA	G6AK-234P-ST-US
36572	G6AK-234P-ST-US-DC48V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	48VDC	UL,CSA	G6AK-234P-ST-US
36568	G6AK-234P-ST-US-DC5V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	5VDC	UL,CSA	G6AK-234P-ST-US
36569	G6AK-234P-ST-US-DC6V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	6VDC	UL,CSA	G6AK-234P-ST-US
35921	G6AK-234P-ST40-US-DC12V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	12VDC	UL,CSA	G6AK-234P-ST40-US
36580	G6AK-234P-ST40-US-DC24V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	24VDC	UL,CSA	G6AK-234P-ST40-US
36573	G6AK-234P-ST40-US-DC3V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	3VDC	UL,CSA	G6AK-234P-ST40-US
36575	G6AK-234P-ST40-US-DC4.5V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	5VDC	UL,CSA	G6AK-234P-ST40-US
36582	G6AK-234P-ST40-US-DC48V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	48VDC	UL,CSA	G6AK-234P-ST40-US
36576	G6AK-234P-ST40-US-DC5V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	6VDC	UL,CSA	G6AK-234P-ST40-US
36577	G6AK-234P-ST40-US-DC6V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	6VDC	UL,CSA	G6AK-234P-ST40-US
36578	G6AK-234P-ST40-US-DC9V	OMRON	PCB Relay	20.2mm x 10.1mm x 8.4mm	DPDT	0.5 A at 125 VAC, 2 A at 30 VDC	9VDC	UL,CSA	G6AK-234P-ST40-US



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699

上海: 86-21-64605107

上海: 100y-1@163.com