

继电器+电磁阀

TTI_PCB继电器



详细产品规格 - 请点击 cn.100y.com.tw

CONTACT RATING

型号	TRA, H TYPE
最大允许通过电压	250VAC 60VDC
最大允许通过电流	0.5A
触点容量电阻装载 (cosΦ=1)	0.1A 125VAC 0.5A 24VDC
额定电流运载	0.5A
最大开关功率	10VA 10W
Referenced min. Applicable Load	1VDC 1mA

PERFORMANCE (at initial value)

型号	TRA
冲击	Endurance 100G Min. Error Operation 13G Min.
寿命	机械 50,000,000 ops. Min. (no load) 2,000,000 ops. Min. (at rated load)
	电子 10,000,000 ops. Min. (6V 10mA)

100Y 编号	厂商编号	制造厂商	说明	Outline L*W*H	Contact Rating	Coil Voltage	Type
22905	TRA-1050(ohm)12VDC	TTI	TTI Relay	25.2*8.1*9.0mm	0.5A/24VDC	12VDC	TRA
22906	TRA-2080(ohm)24VDC	TTI	TTI Relay	25.2*8.1*9.0mm	0.5A/24VDC	24VDC	TRA
22907	TRA-250(ohm)5VDC	TTI	TTI Relay	25.2*8.1*9.0mm	0.5A/24VDC	5VDC	TRA
22910	TRA-250(ohm)6VDC	TTI	TTI Relay	25.2*8.1*9.0mm	0.5A/24VDC	6VDC	TRA
22911	TRA-500(ohm)5VDC	TTI	TTI Relay	25.2*8.1*9.0mm	0.5A/24VDC	5VDC	TRA
22912	TRA-700(ohm)9VDC	TTI	TTI Relay	25.2*8.1*9.0mm	0.5A/24VDC	9VDC	TRA

主要特点:

- 微型。
- 银色或银色合金与金子被镀接触
- 低散逸
- 利用封闭型
- 设计依照外国安全标准 UL.
- UL and cUL recognized


应用:

- 微处理器控制、商店目录交换器和家用电器



PERFORMANCE (at initial value)

型号	TRA
电介质强度	线圈和触点之间 500VAC 50/60HZ (1minute) 触点之间 500VAC 50/60HZ (1minute)
绝缘电阻	100 MΩ Min. (500VDC)
触点电阻	100mΩ Max.
浪涌电阻	1000V (between coil & contact 1x40usec)
环境温度	-25°C to +55°C (无水结露和无水下落)
环境湿度	45 to 85% RH
动作时间	5msec Max.
释放时间	5msec Max.
线圈温度上升	40 deg. Max. (在线圈额定电压中)
重量	Abt. 3.5grs.
振动	Endurance 10 to 55HZ Single amplitude 0.35mm Error Operation 10 to 55HZ Single amplitude 0.35mm
冲击	Endurance 50G Min. Error Operation 10G Min.
寿命	机械 10x10 ⁶ operations Min. (no load)
	电子 10x10 ⁴ operations. Min. (at rated coil voltage)
最大开关	机械 300 operation/min
	电子 30 operation/min

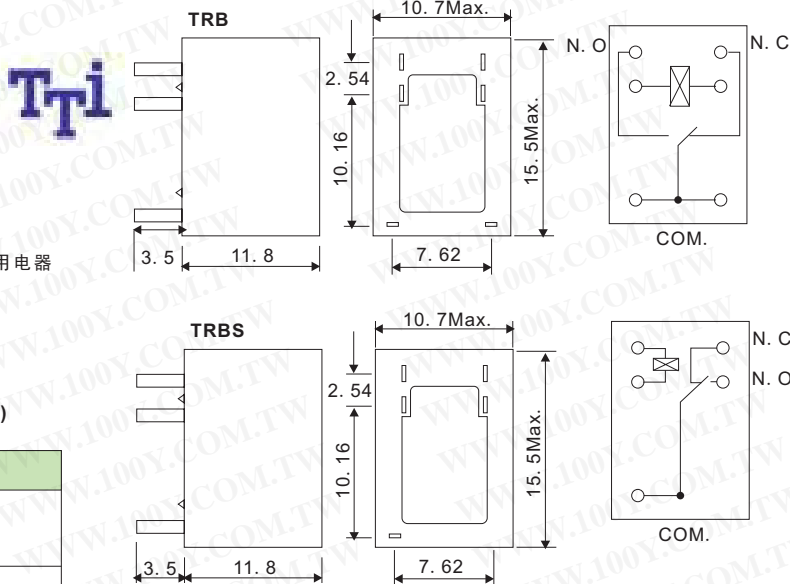

CONTACT RATING

型号	TRBS	TRB-B3	TRB-B5
	1 Amp type	3 Amp type	5 Amp type
最大允许通过电压	125VAC, 30VDC		
最大允许通过电流	1A	3A	5A
触点容量电阻装载 (cosΦ=1)	Coil=0.2W 1A 125VAC 1A 30VDC	Coil=0.36W 3A 125VAC 3A 30VDC	Coil=0.45W 5A 125VAC 5A 14VDC
额定电流运载	1A	3A	5A
最大允许通过功率	30W	90W	70W
Referenced min. Applicable Load	125VA,	375VA,	625VA,
电感负载 (cos=0.4 L/R=7msec)	0.3A 125VAC 0.3A 30VDC		
触点材质	Ag alloy		



服务专线:台湾:886-3-5753170
传 真:台湾:886-3-5753172
E-mail:台湾:sale@100y.com.tw

深圳:86-755-83298787
深圳:86-755-83640655
深圳:100y@163.com

上海:86-21-34970699
上海:86-21-64605107
上海:100y-1@163.com