

## TTI\_PCB继电器


详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)

100Y 编号	厂商编号	制造厂商	说明	Outline L*W*H	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Type
22999	TRIH-12D-SB-2CM	TTI	TTI Relay	29.0*13.0*25.5mm	DPDT	2A 250VAC/30VDC	12VDC	CUL	TRIH
23000	TRIH-24D-FB-1AE	TTI	TTI Relay	29.0*13.0*25.5mm	SPST	16A 250VAC/30VDC	24VDC	CUL	TRIH
23001	TRIH-24D-FB-1AH	TTI	TTI Relay	29.0*13.0*25.5mm	SPST	10A 250VAC/30VDC	24VDC	CUL	TRIH
23002	TRIH-24D-FB-1CE	TTI	TTI Relay	29.0*13.0*25.5mm	SPDT	8A 250VAC/30VDC	24VDC	CUL	TRIH
23003	TRIH-24D-FB-1CH	TTI	TTI Relay	29.0*13.0*25.5mm	SPDT	7.5A 250VAC/30VDC	24VDC	CUL	TRIH
23004	TRIH-24D-FB-2CM	TTI	TTI Relay	29.0*13.0*25.5mm	DPDT	2A 250VAC/30VDC	24VDC	CUL	TRIH
23005	TRIH-24D-SB-1AE	TTI	TTI Relay	29.0*13.0*25.5mm	SPST	16A 250VAC/30VDC	24VDC	CUL	TRIH
23006	TRIH-24D-SB-1AH	TTI	TTI Relay	29.0*13.0*25.5mm	SPST	10A 250VAC/30VDC	24VDC	CUL	TRIH
23007	TRIH-24D-SB-1CE	TTI	TTI Relay	29.0*13.0*25.5mm	SPDT	8A 250VAC/30VDC	24VDC	CUL	TRIH
23008	TRIH-24D-SB-1CH	TTI	TTI Relay	29.0*13.0*25.5mm	SPDT	7.5A 250VAC/30VDC	24VDC	CUL	TRIH
23009	TRIH-24D-SB-2CM	TTI	TTI Relay	29.0*13.0*25.5mm	DPDT	2A 250VAC/30VDC	24VDC	CUL	TRIH
23010	TRIH-48D-SB-2CM	TTI	TTI Relay	29.0*13.0*25.5mm	DPDT	2A 250VAC/30VDC	48VDC	CUL	TRIH
23012	TRIH-5D-SB-1CH	TTI	TTI Relay	29.0*13.0*25.5mm	SPDT	7.5A 250VAC/30VDC	5VDC	CUL	TRIH
23013	TRIH-5D-SB-2CM	TTI	TTI Relay	29.0*13.0*25.5mm	DPDT	2A 250VAC/30VDC	5VDC	CUL	TRIH
23015	TRIH-9D-FB-2CM	TTI	TTI Relay	29.0*13.0*25.5mm	DPDT	2A 250VAC/30VDC	9VDC	CUL	TRIH



**主要特点:**

- 16A 开关电容.
- 1 & 2 pole configurations.
- 5KV/10mm 电介质线圈和触点
- 份量轻为15.7mm.
- 利用密封&开启型
- UL & cUL 认证

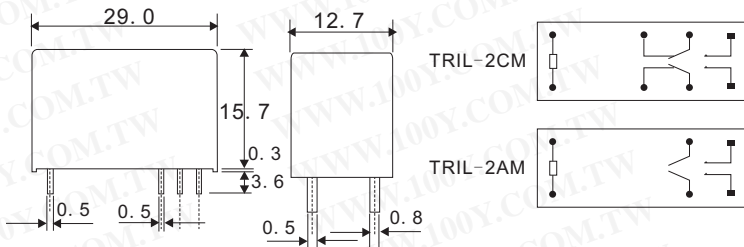


**应用:**

微波炉, 传真, 冰箱空调, 立体声设备, 影印机, 电视机, 自动售货机, 温度调解器等。

**PERFORMANCE (at initial value)**

型号	TRIL
电介质强度	线圈和触点之间 5000VAC. for 1 minute 触点集合之间 2500VAC. for 1 minute 开放触点之间 1000VAC. for 1 minute
动作时间	7msec Max.
释放时间	3msec Max.
绝缘电阻	Min. 100MΩ (at 500VDC)
触点电阻	50mΩMax (measured at 1A 6VDC).
环境温度	-40° to +70°C
环境湿度	35 to 85% RH
线圈温度上升	35 deg. Max. (在线圈额定电压中)
重量	Abt. 13. 5grs.
振动电阻	30 to 150HZ Double Amplitude 1.5mm
冲击电阻	100 m/s <sup>2</sup>
寿命	Mechanical : 1x10 <sup>7</sup> ops. Min. (7200 OPS/Hour) Electrical : 1x10 <sup>6</sup> ops. Min. (360 OPS/Hour)

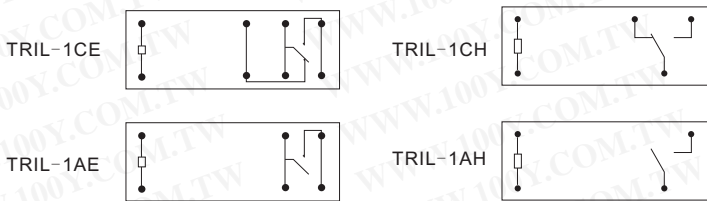

**CONTACT RATING**

型号	SPST (1A) , SPDT (1C)		DPST (2A) , DPDT (2C)
	TRIL-E	TRIL-H	TRIL-M
触点容量电阻装载 (cosψ=1)	16A 250VAC	12A 250VAC	8A 250VAC
最大允许通过电流	16A	12A	8A
最大允许通过电压	250VAC / 125VDC		
额定电流运载	16A	12A	8A
最大允许通过功率	4000VA / 480W	3000VA / 360W	2000VA / 240W
触点材质	Ag Alloy		

100Y 编号	厂商编号	制造厂商	说明	Outline L*W*H	Contact Arrangement	Contact Rating	Coil Voltage	Recognized Safety	Type
23016	TRIL-12D-SB-1AE0.4W	TTI	TTI Relay	29.0*12.7*15.7mm	SPST	16A 250VAC/30VDC	12VDC	CUL	TRIL
23018	TRIL-12D-SB-1CE	TTI	TTI Relay	29.0*12.7*15.7mm	SPDT	16A 250VAC/30VDC	12VDC	CUL	TRIL
23019	TRIL-12D-SB-1CH	TTI	TTI Relay	29.0*12.7*15.7mm	SPDT	12A 250VAC/30VDC	12VDC	CUL	TRIL
23020	TRIL-12D-SB-2CM	TTI	TTI Relay	29.0*12.7*15.7mm	DPDT	8A 250VAC/30VDC	12VDC	CUL	TRIL
23021	TRIL-24D-SB-1CE	TTI	TTI Relay	29.0*12.7*15.7mm	SPDT	16A 250VAC/30VDC	24VDC	CUL	TRIL
23022	TRIL-24D-SB-1CH	TTI	TTI Relay	29.0*12.7*15.7mm	SPDT	12A 250VAC/30VDC	24VDC	CUL	TRIL
23023	TRIL-24D-SB-2CM	TTI	TTI Relay	29.0*12.7*15.7mm	DPDT	8A 250VAC/30VDC	24VDC	CUL	TRIL
23024	TRIL-5D-SB-1CH	TTI	TTI Relay	29.0*12.7*15.7mm	SPDT	12A 250VAC/30VDC	5VDC	CUL	TRIL
23025	TRIL-5D-SB-2CM	TTI	TTI Relay	29.0*12.7*15.7mm	DPDT	8A 250VAC/30VDC	5VDC	CUL	TRIL



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699

上海: 86-21-64605107

上海: 100y-1@163.com