


# 电阻+电位器+旋钮

## 3W 多转精密电位器 (可变电阻)



功耗:	(70°C) 3W
阻值范围:	100Ω~100KΩ
机械行程:	3600°±10°
电阻体极限电压:	200V
机械耐久性:	15000周
阻值误差:	5%, 10%


详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)

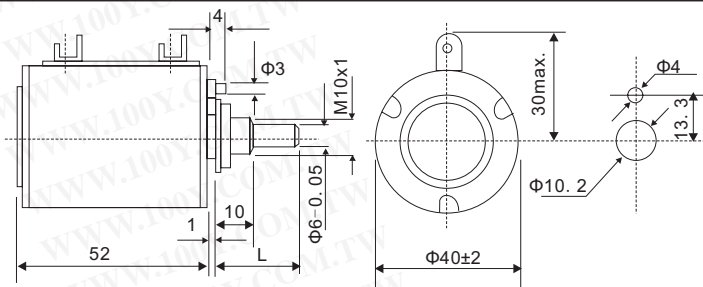

100Y 编号	厂商编号	说明	Shaft Dia. (mm)	电阻值(Ω)	Power rating (W)	圈数	误差值(±)
15746	WXD4-23-10KΩ	精密多圈绕线电位器	6mm	10KΩ	3W	10 圈	±3%



功耗:	(70°C) 3W
阻值范围:	47Ω~56KΩ
机械行程:	1800°±10°
电阻体极限电压:	200V
机械耐久性:	15000周
阻值误差:	5%, 10%

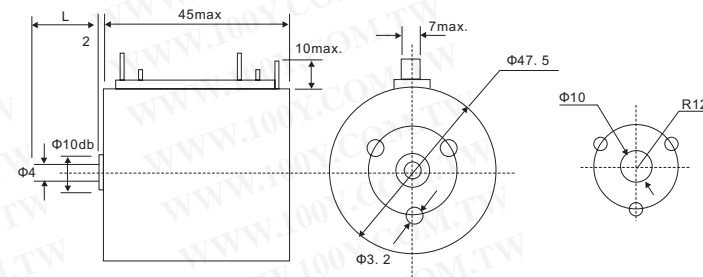


100Y 编号	厂商编号	说明	Shaft Dia. (mm)	电阻值(Ω)	Power rating (W)	圈数	误差值(±)
15747	WXD5-32-10KΩ	精密多圈绕线电位器	4mm	10KΩ	3W	5 圈	±5%

## 5W 多转精密电位器 (可变电阻)



功耗:	(70°C) 5W
阻值范围:	100Ω~120KΩ
机械行程:	3600°±10°
电阻体极限电压:	200V
机械耐久性:	15000周
阻值误差:	5%, 10%

详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)


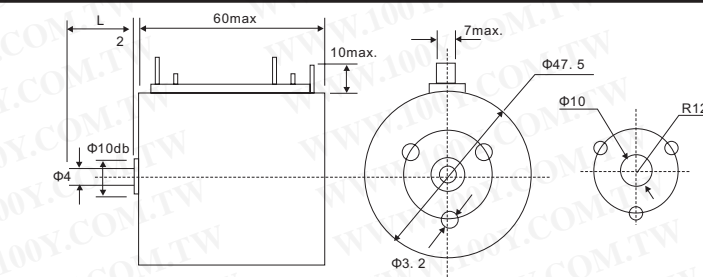


100Y 编号	厂商编号	说明	Shaft Dia. (mm)	电阻值(Ω)	Power rating (W)	圈数	误差值(±)
15748	WXD7-33-3.3KΩ	精密多圈绕线电位器	4mm	3.3KΩ	5W	10 圈	±5%


## 多转旋钮 线性刻度盘




21 Multi-Turn Dial Mechanisms

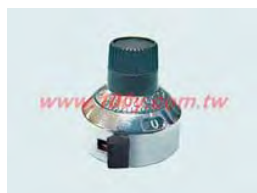

2696 Multi-Turn Dial Mechanisms

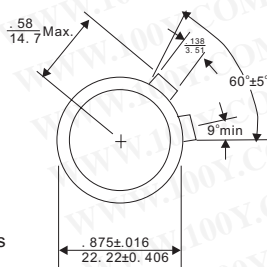


详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)

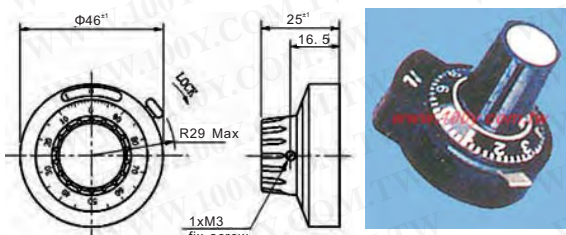

24 Multi-Turn Dial Mechanisms

The precision of referent: 1/50  
The number of cycle: 10 cycles  
Height: 25mm

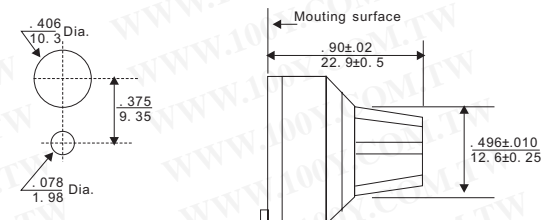

100Y 编号	厂商编号	说明	外径 (mm)	转数	轴孔直径
20169	21 多转旋钮	Φ46 刻度盘	Φ46	15 转	Φ6
20171	24 多转旋钮	刻度盘	Φ24	10 转	Φ4
20170	2696 多转旋钮	刻度盘	Φ22	10 转	Φ4



服务专线: 台湾: 886-3-5753170  
传 真: 台湾: 886-3-5753172  
E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787  
深圳: 86-755-83640655  
深圳: 100y@163.com

上海: 86-21-34970699  
上海: 86-21-64605107  
上海: 100y-1@163.com