

电阻+电位器+旋钮

0603 晶片电阻 (1/10W)



详细产品规格 - 请点击 cn.100y.com.tw

100Y 编号	厂商编号	制造厂商	说明	电阻值(Ω)	误差值(±)	包装单位
20615	0603-4.7KΩ ±1%	LIKET	SMD THICK FILM CHIP RESISTORS	4K7Ω	±1%	5000PCS/R
20150	0603-4.7KΩ±5%	LIKET	SMD 电阻	4.7KΩ	±5%	1 卷/5000 个
23158	0603-4.99Ω±1%	LIKET	0603 Chip Resistors-Thick Film	4.99Ω	±1%	
20590	0603-5.1KΩ ±1%	LIKET	SMD 电阻	5.1KΩ	±1%	5000pcs/R
18107	0603-5.1Ω±1%	LIKET	SMD 电阻	5.1Ω	±1%	
20147	0603-53.6Ω ±1%	LIKET	SMD 电阻	53.6Ω	±1%	1 卷/5000 个
20595	0603-560Ω ±5%	LIKET	SMD 电阻	560Ω	±5%	5000pcs/R
18109	0603-6.49KΩ±1%	LIKET	SMD 电阻	6.49KΩ	±1%	
24923	0603-62Ω±5%	LIKET	SMD 0603 电阻	62 ohm	±5%	
24920	0603-75KΩ±5%	LIKET	SMD 0603 电阻	75Kohm	±5%	
20149	0603-75Ω ±5%	LIKET	SMD 电阻	75Ω	±5%	1 卷/5000 个
18108	0603-75Ω±1%	LIKET	SMD 电阻	75Ω	±1%	
24924	0603-75Ω±5%	LIKET	SMD 0603 电阻	75 ohm	±5%	
23159	0603-787Ω±1%	LIKET	0603 Chip Resistors-Thick Film	787Ω	±1%	
24066	0603-9.1KΩ±1%	LIKET	SMD 电阻	9.1KΩ	±1%	



应用:

电信设备, 收音机和录音机, 电视变频器, 摄像机, 手表, 计算器, 汽车制造业(显示), 计算机, 仪器, 医疗和军事设备。

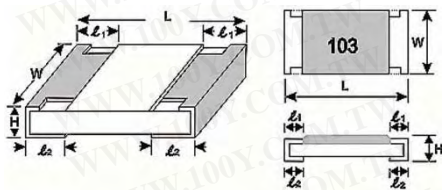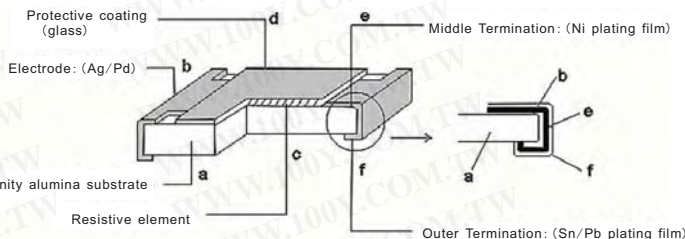

TYLE	DIMENSIONS : (mm)				
	L	W	H	L1	L2
0603	1.00±0.20	0.80±0.15	0.40±0.10	0.30 0.20	0.30 0.15

型号	容量范围 @ 70°C	T.C.R. (ppm/°C) Max.	电阻范围				最大工作电压	最大负载电压	Jumper 额定电流	Jumper Resistance Valus	操作温度范围
			B (±0.1%) D (±0.5%)	F (±1%)	G (±2%)	J (±5%) K (±10%)					
CR 03 (0603)	0.1W	+400~-400	1Ω-9.9Ω	1Ω-9.9Ω	1Ω-9.9Ω	50V	100V	1A	50MΩ Max	-55°C to +125°C	
		+200~-200		10Ω-1MΩ	10Ω-10MΩ						
		+100~-100	10Ω-1MΩ	10Ω-1MΩ							

100Y 编号	厂商编号	制造厂商	说明	电阻值(Ω)	误差值(±)	包装单位
39673	PR031M00XXJ	EVER OHMS	SMD 电阻	1M Ω	±5%	5000PCS/R
39672	PR03330EXXJ	EVER OHMS	SMD 电阻	330Ω	±5%	5000PCS/R
27880	RP030E00XXJ	EVER OHMS	SMD 电阻	0Ω	±5%	5000PCS/R



外观:

电阻器构造内部金属电极增加在各个末端和由电阻贴连接的一个高级陶瓷体。调整其构成近似必需阻抗和所需耐切这电阻层的激光切口。电阻层涂有防护层。此外,二个外在端子(纯锡)增加。

See fig. 4


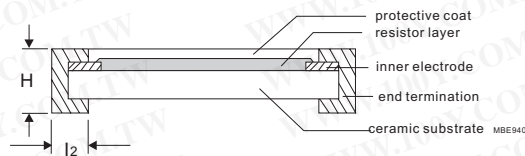


Fig. 4 Chip resistor construction

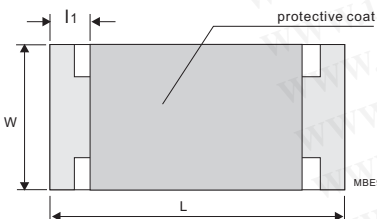

TYPE	RC0603
L (mm)	1.60 ±0.1
W (mm)	0.80 ±0.10
H (mm)	0.45 ±0.10
l1 (mm)	0.25 ±0.15
l2 (mm)	0.25 ±0.15

特征

RC0603 1/10W

操作温度范围	-55 °C to +155 °C
最大工作电压	50 V
最大负载电压	100 V
电介质耐压	100 V
电阻范围	5% (E24) 1 Ω to 22 MΩ Zero Ohm Jumper < 0.05 Ω
温度系数	10 Ω < R ≤ 10 MΩ ±100 ppm/°C R ≤ 10 Ω; R > 10 MΩ ±200 ppm/°C
Jumper Criteria	Rated Current 1.0 A Maximum Current 2.0 A



服务专线: 台湾: 886-3-5753170
传 真: 台湾: 886-3-5753172
E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
深圳: 86-755-83640655
深圳: 100y@163.com

上海: 86-21-34123367 & 54151736 30-54
上海: 86-21-64605107
上海: 100y-1@163.com