


电阻+电位器+旋钮

0603 晶片电阻 (1/10W)

详细产品规格 - 请点击 cn.100y.com.tw




100Y 编号	厂商编号	制造厂商	说明	电阻值(Ω)	误差值(±)	包装单位
19724	RC0603JR-07470R	YAGEO	SMD 电阻	470Ω	±5%	
20309	RC0603JR-0747R	YAGEO	SMD 电阻	47Ω	±5%	
19410	RC0603JR-074K7	YAGEO	SMD 电阻	4.7KΩ	±5%	
12803	RC0603JR-0775R	YAGEO	SMD 电阻	75Ω	±5%	5000pcs/R
27884	RP03100EXXJ		SMD 电阻	100Ω	±5%	
27882	RP0310E0XXJ	YAGEO	SMD 电阻	10Ω	±5%	
27253	RP0310K0XXF		SMD 电阻	10KΩ	±1%	
27868	RP0311K3XXF		SMD 电阻	11.3KΩ	+/-5%	5000PCS/R
28900	RP03130KXXF		0603 电阻	130KΩ	±1%	5000PCS/R
27251	RP0313K3XXF		SMD 电阻	13.3KΩ	±1%	
27885	RP03150EXXJ		SMD 电阻	150Ω	±5%	
27395	RP03180EXXJ		SMD 电阻	180Ω	±1%	
27881	RP031E00XXJ		SMD 电阻	1Ω	±5%	
27256	RP031K00XXF		SMD 电阻	1KΩ	±1%	
28888	RP031K00XXJ		0603 电阻	1KΩ	±5%	5000PCS/R
28891	RP031K40XXF		0603 电阻	1.4KΩ	±1%	5000PCS/R
28892	RP031K62XXF		0603 电阻	1.62KΩ	±1%	5000PCS/R
28902	RP0320K0XXF		0603 电阻	20KΩ	±1%	5000PCS/R
27396	RP03240EXXJ		SMD 电阻	240Ω	±1%	
28893	RP032K00XXF		0603 电阻	2KΩ	±1%	5000PCS/R
28897	RP0330K1XXF		0603 电阻	30.1KΩ	±1%	5000PCS/R
28889	RP03374EXXJ		0603 电阻	374Ω	±1%	5000PCS/R
27398	RP033M30XXJ		SMD 电阻	3.3MΩ	±5%	
28890	RP0347E5XXF		0603 电阻	47.5Ω	±1%	5000PCS/R
28901	RP03499KXXF		0603 电阻	499KΩ	±1%	5000PCS/R
27392	RP0349E9XXF		SMD 电阻	49.9Ω	±1%	
28886	RP034E70XXJ	YAGEO	0603 晶片电阻	4.7Ω	±5%	5000PCS/R
28894	RP034K75XXF		0603 电阻	4.75KΩ	±1%	5000PCS/R
27255	RP0351K10XXF		SMD 电阻	5.1KΩ	±1%	
28898	RP0356K2XXF		0603 电阻	56.2KΩ	±1%	5000PCS/R
28899	RP0361K9XXF		0603 电阻	61.9KΩ	±1%	5000PCS/R
27883	RP0368E0XXJ		SMD 电阻	68Ω	±5%	
28895	RP036K19XXF		0603 电阻	6.19KΩ	±1%	5000PCS/R
27252	RP036K34XXF		SMD 电阻	6.34KΩ	±1%	
28896	RP036K65XXF		0603 电阻	6.65KΩ	±1%	5000PCS/R
28887	RP036K80XXJ		0603 晶片电阻	6.8KΩ	±5%	5000PCS/R
27399	RP036M80XXJ		SMD 电阻	6.6MΩ	±5%	



特点:

- RuO₂ 浓厚涂膜电阻器元素
- 无浸镍障碍终止
- Meets or exceeds EIA 575, EIAJ RC 2690A, EIA PDP-100, MIL-R-55342F
- 标号: 白色三数字在黑防护外套无标号在1F, 1H, 1E 尺寸
- 产品以无铅终止符合ROHS要求
- 铅位于玻璃材料、电极和电阻器元素是豁免每附录1, 豁免5 欧共体方针 2005/95/EC

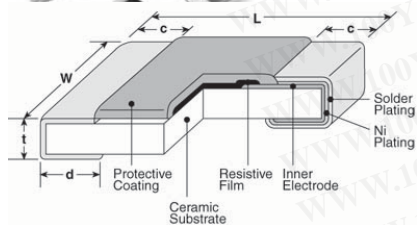

直径和外壳

Type (Inch Size Code)	Dimensions inches (mm)				
	L	W	c	d	t
1J (0603)	.063±.008 (1.6±0.2)	.031±.004 (0.8±0.1)	.012±.004 (0.3±0.1)	.012±.004 (0.3±0.1)	.018±.004 (0.45±0.1)

应用和规定值

部份指定*	容量范围 @ 70°C	T.C.R. (ppm/°C) Max.	电阻范围 E-24** (G±2%)	电阻范围 E-24** (J±5%)	绝对最大值 工作电压	绝对最大值 负载电压	操作温度范围***
RK73B1J (0603)	1/10W (.10W)	±200	10Ω- 10MΩ	10Ω- 10MΩ	50V	100V	-55°C to +155°C
		±400	1.0Ω- 9.1Ω	1.0Ω- 9.1Ω 11MΩ- 22MΩ			

100Y 编号	厂商编号	说明	电阻值(Ω)	误差值(±)	包装单位
41567	RK73B1JTTD103J	电阻	10Ω	±5%	7 paper tape
41570	RK73B1JTTD104J	电阻	10Ω	±5%	7 paper tape
41569	RK73B1JTTD105J	电阻	10Ω	±5%	7 paper tape
41564	RK73B1JTTD106J	电阻	10Ω	±5%	7 paper tape



服务专线: 台湾: 886-3-5753170
 传 真: 台湾: 886-3-5753172
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
 深圳: 86-755-83640655
 深圳: 100y@163.com

上海: 86-21-34970699
 上海: 86-21-64605107
 上海: 100y-1@163.com