



电阻+电位器+旋钮

BEST_3266 方型多圈玻璃釉 微调电位器

详细产品规格 - 请点击 cn.100y.com.tw

100Y 编号	厂商编号	说明	电阻质(Ω)	Type	误差值(±)	Power Rating (W)
15407	3266W-100KΩ	12 转微调可变电阻(无铅)	100KΩ	3266W	±10%	0.25W
15401	3266W-100Ω	12 转微调可变电阻(无铅)	100Ω	3266W	±10%	0.25W
15406	3266W-10KΩ	12 转微调可变电阻(无铅)	10KΩ	3266W	±10%	0.25W
15404	3266W-1KΩ	12 转微调可变电阻(无铅)	1KΩ	3266W	±10%	0.25W
15402	3266W-200Ω	12 转微调可变电阻(无铅)	200Ω	3266W	±10%	0.25W
15405	3266W-2KΩ	12 转微调可变电阻(无铅)	2KΩ	3266W	±10%	0.25W
15403	3266W-500Ω	12 转微调可变电阻(无铅)	500Ω	3266W	±10%	0.25W
31100	3266W-50Ω	12 转微调可变电阻(无铅)	50Ω	3266W	±10%	0.25W

TRIMMER_WIW3296 多圈方型 玻璃釉微调电位器

详细产品规格 - 请点击 cn.100y.com.tw







- 特点:
- 多圈/金属陶瓷/工业/密封
 - 5端型号 (W, X, P, Y, Z)
 - 关节可手动调节

电子特征	
标准电阻范围	10 to 5 megohms (see standard resistance table)
耐电阻	±10% std.(tighter tolerance available)
极小电阻	1% or 2 ohms max. (whichever is greater)
接点电阻变更	3% or 3 ohms max.(whichever is greater)
适应性	Voltage ±0.01% Resistance ±0.05%
决议	Infinite
绝缘电阻	500 vdc 1,000 megohms min.
电介质强度	101.3 kPa 600 vac 8.5 kPa 360 vac
电子行程	25 turns nom.

环境特征	
额定功率 (300 volts max.)	0.5 watt (70°C), 0 watt (125°C)
温度范围	-55°C to +125°C
温度系数	±100ppm/°C
振动	98 m/s ² (1%ΔTR; 1%ΔVR)
冲击	490 m/s ² (1%ΔTR; 1%ΔVR)
Load Life	1,000 hours 0.5 watt @ 70°C (3%ΔTR; 3% or 3 ohm, whichever is greater, CRV)
Rotational Life	200 cycles (3%ΔTR; 3% or 3 ohm, whichever is greater, CRV)

物理特性	
扭矩	36 mN·m max.
机械终止	Wiper idles
端子	Solderable pins
标准包装	50 pcs. per tube

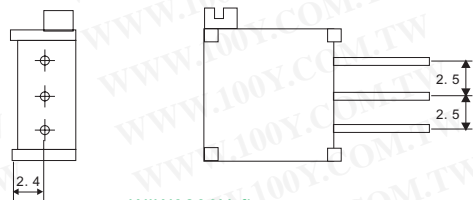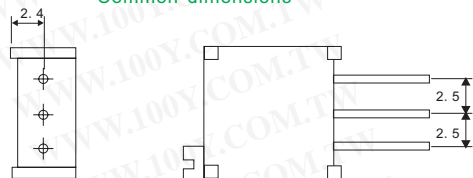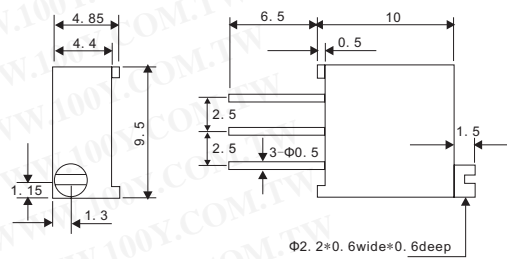

100Y 编号	厂商编号	说明	电阻质(Ω)	Type	误差值(±)	Power Rating (W)
15424	WIW3296W-100KΩ	TRIMMER_WIW3296 25 转微调可变电阻	100KΩ	WIW3296W	±10%	0.5W
15418	WIW3296W-100Ω	TRIMMER_WIW3296 25 转微调可变电阻	100Ω	WIW3296W	±10%	0.5W
15423	WIW3296W-10KΩ	TRIMMER_WIW3296 25 转微调可变电阻	10KΩ	WIW3296W	±10%	0.5W
15417	WIW3296W-10Ω	TRIMMER_WIW3296 25 转微调可变电阻	10Ω	WIW3296W	±10%	0.5W
15421	WIW3296W-1KΩ	TRIMMER_WIW3296 25 转微调可变电阻	1KΩ	WIW3296W	±10%	0.5W
15419	WIW3296W-200Ω	TRIMMER_WIW3296 25 转微调可变电阻	200Ω	WIW3296W	±10%	0.5W
15422	WIW3296W-2KΩ	TRIMMER_WIW3296 25 转微调可变电阻	2KΩ	WIW3296W	±10%	0.5W
15425	WIW3296W-2MΩ	TRIMMER_WIW3296 25 转微调可变电阻	2MΩ	WIW3296W	±10%	0.5W
15420	WIW3296W-500Ω	TRIMMER_WIW3296 25 转微调可变电阻	500Ω	WIW3296W	±10%	0.5W
15415	WIW3296X-100KΩ	TRIMMER_WIW3296 25 转微调可变电阻	100KΩ	WIW3296X	±10%	0.5W
15409	WIW3296X-100Ω	TRIMMER_WIW3296 25 转微调可变电阻	100Ω	WIW3296X	±10%	0.5W
15414	WIW3296X-10KΩ	TRIMMER_WIW3296 25 转微调可变电阻	10KΩ	WIW3296X	±10%	0.5W
15408	WIW3296X-10Ω	TRIMMER_WIW3296 25 转微调可变电阻	10Ω	WIW3296X	±10%	0.5W
15412	WIW3296X-1KΩ	TRIMMER_WIW3296 25 转微调可变电阻	1KΩ	WIW3296X	±10%	0.5W
15410	WIW3296X-200Ω	TRIMMER_WIW3296 25 转微调可变电阻	200Ω	WIW3296X	±10%	0.5W
15413	WIW3296X-2KΩ	TRIMMER_WIW3296 25 转微调可变电阻	2KΩ	WIW3296X	±10%	0.5W
15416	WIW3296X-2MΩ	TRIMMER_WIW3296 25 转微调可变电阻	2MΩ	WIW3296X	±10%	0.5W
15411	WIW3296X-500Ω	TRIMMER_WIW3296 25 转微调可变电阻	500Ω	WIW3296X	±10%	0.5W



服务专线: 台湾: 886-3-5753170
 传 真: 台湾: 886-3-5753172
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
 深圳: 86-755-83640655
 深圳: 100y@163.com

上海: 86-21-34970699
 上海: 86-21-64605107
 上海: 100y-1@163.com