


# 电阻+电位器+旋钮

## TRIMMER\_WI1016 单圈圆型 玻璃釉微调电位器

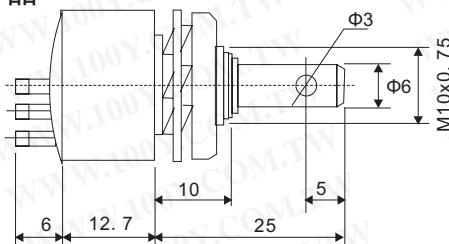

详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)


物理特性	
机械角度	260° nom
扭矩	50 mN·m max.
终止强度	350 mN·m min.

电子特征	
标准电阻范围	100 to 5 megohms (see standard resistance table)
耐电阻	±20% or ±10% (tighter tolerance available)
极小电阻	1% or 10 ohms max. (whichever is greater)
接点电阻变更	5% or 5 ohms max. (whichever is greater)
适应性	Voltage±0.05% Resistance±0.15%
决议	Infinite
绝缘电阻	500 vdc 1,000 megohms min.
电介质强度	101.3 kPa 800 vac 8.5 kPa 500 vac
电子角度	225° nom.



环境特征	
额定功率(500 volts max.)	1.5 watt (70°C), 0 watt (125°C)
温度范围	-55°C to +125°C
温度系数	±250ppm/°C or ±100ppm/°C
振动	98 m/s <sup>2</sup> (2%ΔTR; 2%ΔVR)
冲击	490 m/s <sup>2</sup> (2%ΔTR; 2%ΔVR)
Load Life	1,000 hours 1.5 watt @ 70°C (10%ΔTR; 6% or 6 ohms, Whichever is greater, CRV)
Rotational Life	10,000 cycles (10%ΔTR; 6% or 6 ohms, Whichever is greater, CRV)

100Y 编号	厂商编号	说明	Type	电阻质(Ω)	Dia.* Length	shaft Dia*L (mm)	误差值(±)	Power Rating (W)
15428	WI1016-3-15KΩ	微调可变电阻 1.5W 260° 转	WI1016-3	15KΩ	(ψ)20 * (L)12.7	6*25mm	±20%	1.5W

## TRIMMER\_WI11 单圈圆型 玻璃釉微调电位器

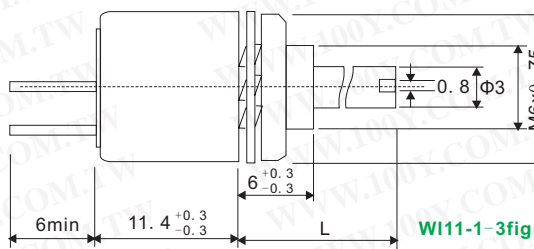

L					
9	12	16	20	25	32

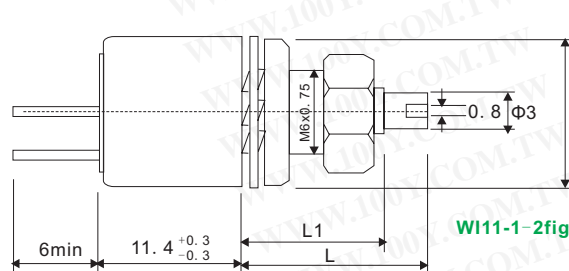

L1	L
11	12
13	16

物理特性	
机械角度	280°±15° nom.
扭矩	80 mN·m max.
终止强度	150 mN·m min.

电子特征	
标准电阻范围	47 to 4.7 megohms (see standard resistance table)
耐电阻	±10% or ±20% std. (tighter tolerance available)
极小电阻	1% or 2 ohms max. (Whichever is greater)
接点电阻变更	4% or 4 ohms max. (whichever is greater)
决议	Infinite
绝缘电阻	500 vdc 1,000 megohms min.
电介质强度	101.3 kPa 1000 vac 8.5 kPa 350 vac
电子角度	250°±10° nom.

环境特征	
额定功率(250 volts max.)	0.5 watt (70°C), 0 watt (125°C)
温度范围	-55°C to +125 °C
温度系数	±100ppm/°C
振动	98 m/s <sup>2</sup> (2%ΔTR; 2%ΔVR)
冲击	390 m/s <sup>2</sup> (2%ΔTR; 2%ΔVR)
Load Life	1,000 hours 0.5 watt @ 70°C (5%ΔTR; 8% or 8 ohm, Whichever is greater, CRV)
Rotational Life	10000 cycles (-1) 1000 cycles (-2) (5%ΔTR; 8% or 8 ohm, Whichever is greater, CRV)

100Y 编号	厂商编号	说明	Type	电阻质(Ω)	Dia.* Length	shaft Dia*L (mm)	误差值(±)	Power Rating (W)
15432	WI11-1-3-100KΩ-12mm	微调可变电阻	WI11-1-3 ZS-3	100KΩ	(ψ)12.7 * (L)12mm	3*12mm	±10%	1W
15427	WI11-1-3-10KΩ-12mm	微调可变电阻	WI11-1-3 ZS-3	10KΩ	(ψ)12.7 * (L)11.4	3*12mm	±10%	1W
15430	WI11-1-3-1KΩ-16mm	微调可变电阻	WI11-1-3 ZS-3	1kΩ	(ψ)12.7 * (L)11.4	3*16mm	±10%	1W
15429	WI11-1-3-1MΩ-12mm	微调可变电阻	WI11-1-3 ZS-3	1MΩ	(ψ)12.7 * (L)11.4	3*12mm	±10%	1W



服务专线: 台湾: 886-3-5753170  
 传 真: 台湾: 886-3-5753172  
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787  
 深圳: 86-755-83640655  
 深圳: 100y@163.com

上海: 86-21-34970699  
 上海: 86-21-64605107  
 上海: 100y-1@163.com