

# 电阻+电位器+旋钮

## 碳膜可变电阻

详细产品规格 - 请点击 [cn.100y.com.tw](http://cn.100y.com.tw)


100Y 编号	厂商编号	制造厂商	说明	Power rating (W)	电阻值(Ω)	误差值(±)
32712	R1610G-8A1-B101-0H03	HT	插板式双联可变电阻	1/4W	100	±20%
32719	R1610G-8A1-B102-0H03	HT	插板式双联可变电阻	1/4W	1K	±20%
32724	R1610G-8A1-B103-0H03	HT	插板式双联可变电阻	1/4W	10KΩ	±20%
32728	R1610G-8A1-B104-0H03	HT	插板式双联可变电阻	1/4W	100K	±20%
32730	R1610G-8A1-B105-0H03	HT	插板式双联可变电阻	1/4W	1M	±20%
32714	R1610G-8A1-B201-0H03	HT	插板式双联可变电阻	1/4W	200	±20%
32721	R1610G-8A1-B202-0H03	HT	插板式双联可变电阻	1/4W	2K	±20%
32726	R1610G-8A1-B203-0H03	HT	插板式双联可变电阻	1/4W	20KΩ	±20%
29332	R1610G-8A1-B501-0H03		插板式双联可变电阻	1/4W	500	±20%
32723	R1610G-8A1-B502-0H03	HT	插板式双联可变电阻	1/4W	5K	±20%
32727	R1610G-8A1-B503-0H03	HT	插板式双联可变电阻	1/4W	50K	±20%
32729	R1610G-8A1-B504-0H03	HT	插板式双联可变电阻	1/4W	500K	±20%



机械的性能	
全回转角度	300° ± 5°
回转扭力	2~20mN. m (20~200gf. cm)
止回转强度	0.7 N. m (7kgf. cm)
轴推拉强度	70N (7kgf)
C. C. 位置	Center, 11/21/31/41 detent

耐久的性能	
回转寿命	15,000 cycles

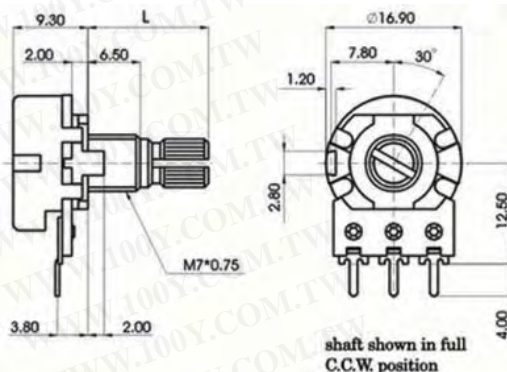

电气的性能	
总阻值	5KΩ~2MΩ
总阻值容许差	±20° (more than 1MΩ ±30%)
定格电力	Curve B: 0.125W other than B: 0.06W
最高使用电压	Curve B: 200V other than B: 150V
阻值线性	A, B, C, D
残留阻值	R ≥ 250KΩ 0.1% max. of total resistance 250KΩ > R > 10KΩ 20Ω max. 10KΩ ≥ R 10Ω max.
绝缘抵抗	More than 100MΩ at DC500V
相互偏差	-40~0 dB ≤ 3dB (Specialy: -60~0 dB ≤ 1.5dB)


100Y 编号	厂商编号	制造厂商	说明	Power rating (W)	电阻值(Ω)	误差值(±)
5457	R1610N-8A1-B101-0H03		插板式可变电阻	1/4W	100Ω	±20%
38100	R1610N-8A1-B102-0H03	HT	插板式可变电阻	1/4W	1KΩ	±20%
32735	R1610N-8A1-B103-0H03	HT	插板式可变电阻	1/4W	10KΩ	±20%
32084	R1610N-8A1-B104-0H03	HT	插板式可变电阻	1/4W	100KΩ	±20%
12194	R1610N-8A1-B105-0H03		插板式可变电阻	1/4W	1MΩ	±20%
2066	R1610N-8A1-B202-0H03		插板式可变电阻	1/4W	2KΩ	±20%
2069	R1610N-8A1-B203-0H03		插板式可变电阻	1/4W	20KΩ	±20%
4791	R1610N-8A1-B205-0H03		插板式可变电阻	1/4W	2MΩ	±20%
32737	R1610N-8A1-B254-0H03	HT	插板式可变电阻	1/4W	250KΩ	±20%
2070	R1610N-8A1-B303-0H03		插板式可变电阻	1/4W	30KΩ	±20%
29320	R1610N-8A1-B501-0H03	HT	插板式可变电阻	1/4W	500Ω	±20%
38098	R1610N-8A1-B502-0H03	HT	插板式可变电阻	1/4W	5KΩ	±20%
38097	R1610N-8A1-B503-0H03	HT	插板式可变电阻	1/4W	50KΩ	±20%
10656	R1610N-8A1-B504-0H03		插板式可变电阻	1/4W	500KΩ	±20%



机械的性能	
全回转角度	300° ± 5°
回转扭力	2~20mN. m (20~200gf. cm)
止回转强度	0.7 N. m (7kgf. cm)
轴推拉强度	70N (7kgf)
C. C. 位置	Center, 11/21/31/41 detent

耐久的性能	
回转寿命	15,000 cycles

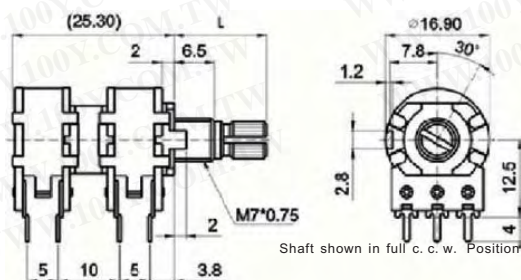

服务专线: 台湾: 886-3-5753170  
 传 真: 台湾: 886-3-5753172  
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787  
 深圳: 86-755-83640655  
 深圳: 100y@163.com

上海: 86-21-34970699  
 上海: 86-21-64605107  
 上海: 100y-1@163.com