


驱动+通信介面IC

Elantec_驱动MOSFET & IGBT IC


详细产品规格 - 请点击 cn.100y.com.tw



100Y 编号	厂商编号	制造厂商	说明	Pins/Package	Supply voltage	Operating Temp
33085	EL7202CN	Elantec	High Speed, Dual Channel Power MOSFET Drivers	8-Pin P-DIP	15V	-40°C to 85°C
33086	EL7212CN	Elantec	High Speed, Dual Channel Power MOSFET Drivers	8-Pin P-DIP	15V	-40°C to 85°C
41252	EL7212CS	Elantec	DUAL CHANNEL POWER MOSFET DRIVERS	8P/DIP	16.5V	-40 °C TO +80°C
33087	EL7242CN	Elantec	Dual Input, High Speed, Dual Channel Power MOSFET Driver	8-Pin P-DIP	16V	-40°C to 85°C

数据和通信类 IC

详细产品规格 - 请点击 cn.100y.com.tw

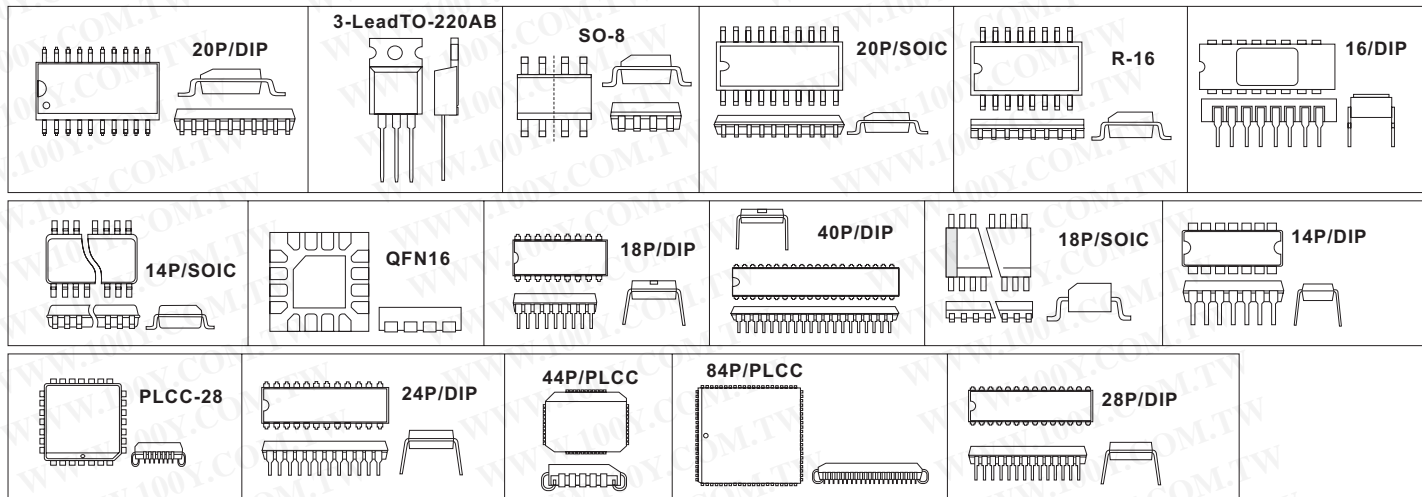

100Y 编号	厂商编号	制造厂商	说明	Pins/Package	Operating Temp.	Supply voltage
23237	20PT1024		10/100 BASE-TX LAN MAGNETICS FOR AUTO MDI/MDIX APPLICATION	20P/DIP	0~70°C	
26051	20PT1024X		10/100 BASE-TX LAN MAGNETICS FOR AUTO MDI/MDIX APPLICATION	20P/DIP	0~70°C	
42783	2SK1542	TOSHIBA	通信工业用驱动 IC	TO-220	-55~150	60V
41428	65HVD3082EP	T.I.	low-power rs-485 transceiver available in small moeop-8 package	MSOP-8	-40°C~85°C	7
13194	AD598JR	ADI	LVDT Signal Conditioner	20P/SOIC	0°C to +70°C	13-16V
32361	AD630BD	ADI	Balanced Modulator/Demodulator	20P/DIP	-25°C to +85°C	±5 to ±16.5 Volts
32362	AD630JN	ADI	Balanced Modulator/Demodulator	20P/DIP	0°C to +70°C	±5 to ±16.5 Volts
44519	AD694AR	ADI	驱动 IC	R-16	-40+85C	+4.5 V
32659	ADXL202JQC	ADI	Low Cost ±2 g/±10 g Dual Axis iMEMS Accelerometers with Digital Output	14-Lead CERPAK	0°C to +70°C	+3 V to +5.25 V
49226	ADXL330KCPZ	ADI	Small, Low Power, 3-Axis ±3 gi MEMSR Accelerometer	16-Lead LFCSP	-25°C ~70°C	2~3.6V
7166	AK8870G	AsahiKASEI	Intergrated DTMF receiver	18P/DIP	-40~+85°C	4.75~5.25V
17962	CM8870P1	CAMD	Intergrated DTMF receiver	18P/DIP	-40~+85°C	4.75~5.25V
33316	HD3-4702-9	Intersil	CMOS Programmable Bit Rate Generator	16P/DIP	-40°C~85°C	+8.0V
39256	HT-12E	HOLTEK	Series of Encoders	18P/DIP	20 C to 75 C	2.4V~12V
27620	HT82K628A	HOLTEK	Windows 2000 Keyboard Encoder	40P/DIP	- 25 °C to 70 °C	-0.3~5.5V
43610	HT82K68E	HOLTEK	MultimediaKeyboardEncoder8-BitOTPMCU	SSOP-48	-25°C to 70°C	6
33260	HT9170D	HOLTEK	DTMF Receiver	18-pin SOP	-20°C to 75°C	2.5V~5.5V
22617	HT9200A	HOLTEK	DTMF Generators	8P/DIP	-20~75°C	2~5.5V
16986	ICS1893AF	ICS	ICS3.3-V 10Base-T/100Base-TX Integrated PHYceiver (TM)	48P/SSOP	0°C~70°C	3.3V
22648	L3240N	ST(SGS)	ELETRONIC TWO-TONE RINGER	8P/DIP	-20~70°C	26V
44258	LM1496H	N.S	数据和通信类 IC	8P/Metal Can	0°C to +70°	
42339	MAX3646ETG+T	MAXIM	155Mbps to 622Mbps SFF/SFP Laser Driver with Extinction Ratio Control	24 Thin QFN	-40°C to +85°C	+3.3V
42343	MAX3656ETG-T	MAXIM	155Mbps to 2.5Gbps Burst-ModeLaser Driver	24 Thin QFN-EP**	-40°C to +85°C	+3.3V
42347	MAX3737ETJ+	MAXIM	Multirate Laser Driver with Extinction Ratio Control	32 Thin QFN	-40°C to +85°C	+3.3V
42458	MAX4717EUB+T	MAXIM	4.5? /20?, 300MHz Bandwidth, Dual SPDTAnalog Switches in UCSP	10 μMAX		
3831	MC1496P	MOTOROLA	Balanced modulator/demodulator	14P/DIP	0°C to +70°C 0~70°C	12V
42046	MC3400AP1	ON-Semi.	Dual EIA-423/EIA-232D Line Driver	PDIP/8		
7172	MK5371N-00M	ST(SGS)	Telephone dialer	18P/DIP		
17961	MT8870CE	Mitel	Intergrated DTMF receiver	18P/DIP	-40~+85°C	4.75~5.25V
28996	MT8870DE	Mitel	Integrated DTMF Receiver	18P/DIP	-40°C~85°C	4.75~5.25V
14500	MT8870DS	Mitel	Integrated DTMF Receiver	18P/SOIC	-40°C~85°C	4.75~5.25V
16063	MT8888CE	ZARLINK	Integrated DTMF Transceiver with Intel Micro Interface	20P/DIP	-40°C~85°C	6V
32476	NE5521N	PHILIPS	LVDT signal conditioner	18-Pin Plastic Dual In-Line	0 to +70°C	20V
23236	PKD01EPZ	ADI	Monolithic Peak Detector with Reset-and-Hold Mode	14P/Plastic DIP	0°C to 70°C	±18V
23965	SA701D	PHILIPS	low power ECL prescaler	8P/SOIC	-40 to +85°C	-0.3 to +7.0
34853	SCC2681AC1N40	PHILIPS	Dual asynchronous receiver/transmitter	DIP40	0 °C to 70 °C	40V
34856	SCC2691AC1A28	PHILIPS	Universal asynchronous receiver/transmitter (UART)	28PLCC	-65 to +150 °C	7V
34858	SCC2691AC1N24	PHILIPS	Universal asynchronous receiver/transmitter (UART)	24-Pin Plastic Dual In-Line	0°C to +70°C	+5V +10%,
34863	SCC2692AC1N40	PHILIPS	Dual asynchronous receiver/transmitter (DUART)	40-Pin Plastic Dual In-Line	0 to +70°C	+5V +10%,
34864	SCC2692AE1A44	PHILIPS	Dual asynchronous receiver/transmitter (DUART)	44-Pin Plastic Leadged Chip Carrier	-40 to +85°C	+5V +10%,



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699

上海: 86-21-64605107

上海: 100y-1@163.com