




74HC/HCT~逻辑IC系列

详细产品规格 - 请点击 cn.100y.com.tw

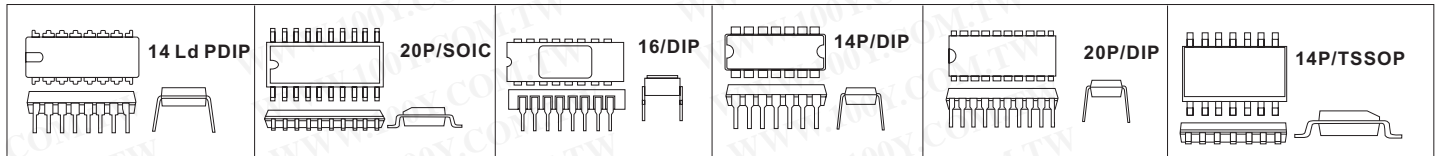

100Y 编号	厂商编号	制造厂商	说明	Pins/Package	Vcc(Supply voltage)	Operating Temp.
32847	CD74HCT193E	T.I.	High Speed CMOS Logic Presettable Synchronous 4-Bit Up/Down Counters	16 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32848	CD74HCT221E	T.I.	High Speed CMOS Logic Dual Monostable Multivibrator with Reset	16 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32849	CD74HCT221M	T.I.	High Speed CMOS Logic Dual Monostable Multivibrator with Reset	16 Ld SOIC	4.5V to 5.5V	-55 to 125°C
32852	CD74HCT240E	T.I.	High Speed CMOS Logic Octal Buffer/Line Drivers, Three-State	20 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32853	CD74HCT244E	T.I.	High Speed CMOS Logic Octal Buffer/Line Drivers, Three-State	20 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32854	CD74HCT244M	T.I.	High Speed CMOS Logic Octal Buffer/Line Drivers, Three-State	20 Ld SOIC	4.5V to 5.5V	-55 to 125°C
32855	CD74HCT245E	T.I.	High Speed CMOS Logic Octal-Bus Transceiver, Three-State, Non-Inverting	20 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32857	CD74HCT245M	T.I.	High Speed CMOS Logic Octal-Bus Transceiver, Three-State, Non-Inverting	20 Ld SOIC	4.5V to 5.5V	-55 to 125°C
32860	CD74HCT273E	T.I.	High Speed CMOS Logic Octal D-Type Flip-Flop with Reset	20 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32862	CD74HCT273M	T.I.	High Speed CMOS Logic Octal D-Type Flip-Flop with Reset	20 Ld SOIC	4.5V to 5.5V	-55 to 125°C
32864	CD74HCT283E	T.I.	High Speed CMOS Logic 4-Bit Binary Full Adder with Fast Carry	16 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32865	CD74HCT297E	T.I.	High-Speed CMOS Logic Digital Phase-Locked-Loop	16 Ld PDIP	4.5 to 5.5V	-55 to 125°C
32870	CD74HCT32E	T.I.	High Speed CMOS Logic Quad 2-Input OR Gate	14 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32874	CD74HCT373E	T.I.	High Speed CMOS Logic Octal Transparent Latch, Three-State Output	20 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32879	CD74HCT373M	T.I.	High Speed CMOS Logic Octal Transparent Latch, Three-State Output	20 Ld SOIC	4.5V to 5.5V	-55 to 125°C
32885	CD74HCT374E	T.I.	High Speed CMOS Logic Octal D-Type Flip-Flop, Three-State Positive-Edge Triggered	20 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32891	CD74HCT390E	T.I.	High Speed CMOS Logic Dual Decade Ripple Counter	16 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32895	CD74HCT4040E	T.I.	High Speed CMOS Logic 12-Stage Binary Counter	16 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32898	CD74HCT4040M	T.I.	High-Speed CMOS Logic 12-Stage Binary Counter	16 Ld SOIC	4.5V to 5.5V	-55 to 125°C
32899	CD74HCT4046AE	T.I.	High-Speed CMOS Logic Phase-Locked-Loop with VCO	16 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32902	CD74HCT4051E	T.I.	High Speed CMOS Logic Analog Multiplexers/Demultiplexers	16 Ld PDIP	4.5V to 5.5V	-55 to 125°C
34587	CD74HCT4051M96	T.I.	High-Speed CMOS Logic Analog Multiplexers/Demultiplexers	16 Ld SOIC	4.5V to 5.5V	-55 to 125°C
32903	CD74HCT540E	T.I.	High Speed CMOS Logic Octal Buffer and Line Drivers, Three-State	20 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32904	CD74HCT541E	T.I.	High Speed CMOS Logic Octal Buffer and Line Drivers, Three-State	20 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32881	CD74HCT573E	T.I.	High Speed CMOS Logic Octal Transparent Latch, Three-State Output	20 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32888	CD74HCT574E	T.I.	High Speed CMOS Logic Octal D-Type Flip-Flop, Three-State Positive-Edge Triggered	20 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32905	CD74HCT688E	T.I.	8-bit magnitude comparator	20 Ld PDIP	4.5-5.5V	-55 to 125°C
1031	CD74HCT688M	T.I.	8-bit magnitude comparator	20P/SOIC(300mil)	4.5-5.5V	-40-85°C
32907	CD74HCT74E	T.I.	Dual D Flip-Flop with Set and Reset Positive-Edge Trigger	14 Ld PDIP	4.5V to 5.5V	-55 to 125°C
32908	CD74HCT86E	T.I.	High Speed CMOS Logic Quad 2-Input EXCLUSIVE OR Gate	14 Ld PDIP	4.5V to 5.5V	-55 to 125°C
712	GD74HC367C	NEC	Hex Tri-State Buffer(Hex Bus Drivers with noninverted 3-state output)	16P/DIP	2-6V	-55-125°C
669	HD74HC51		Dual 2-in AND-OR-INV Gate(2-wide 2-input, 2-wide 3-input AND-OR-INVERT Gates)	14P/DIP	4.75-5.25V	0-70°C
718	GD74HC534		Octal D-type Flip-Flops with inverted 3-state output	20P/DIP	2-6V	-40-85°C
657	HD74HC00P	RENESAS	Quad 2-Input NAND Gate	14P/DIP	2-6V	-40-85°C
29616	HD74HC02P	HITACHI	Quad 2-Input NOR Gate	14P/DIP	2-6V	-40-85°C
13892	HD74HC04D	HITACHI	Hex Inverter	14P/SOIC	2-6V	-40-+85°C
658	HD74HC04P	RENESAS	Hex Inverter	14P/DIP	2-6V	-40 to +125 °C
40169	HD74HC04RPEL	HITACHI	Hex Inverter	14P/SOP	-0.5-7V	-65-150°C
659	HD74HC05P	HITACHI	日立_Hex Inverter (Open Collector)(Hex Inverters with Open Drain outputs)	14P/DIP	0.5V~ 7.0V	-40-+85°C
660	HD74HC08P	HITACHI	日立_Quad 2-Input AND Gate	14P/DIP	2-6V	-40-85°C
27934	HD74HC08RPEL	HITACHI	Quad 2-Input AND Gate	14P/SOIC	2-6V	-40-85°C
661	HD74HC09P	HITACHI	日立_Quad 2-Input AND Gate (O,C)(Quad. 2-input AND Gates with Open Drain outputs)	14P/DIP	2-6V	-40-85°C
675	HD74HC109P	HITACHI	日立_Dual J-K Flip-Flop with Set and Reset(Dual J-K Flip-Flops with Preset and Clear)	16P/DIP	2-6V	-40-85°C
662	HD74HC10P	HITACHI	日立_Triple 3-Input NOR Gate(Triple 3-input NAND Gates)	14P/DIP	2-6V	-40-85°C
663	HD74HC11P	HITACHI	日立_Triple 3-Input AN Gate	14P/DIP	2-6V	-40-85°C
676	HD74HC123AP	HITACHI	日立_Dual Retriggerable Monostable Multivibrator with clear	16P/DIP	2-6V	-55-125°C
19248	HD74HC125D	HITACHI	Quad buffer/line driver; 3-state	14P/SOIC	4.5-5.5V	-40-85°C
4476	HD74HC125P	HITACHI	3-STATE Quad Buffers	14P/DIP	2-6V	-40-85°C
678	HD74HC126P	HITACHI	日立_Tri-State Quad Buffer	14P/DIP	2-6V	-40-85°C
4489	HD74HC132P	HITACHI	Quad 2-input NAND Schmitt Trigger	14P/DIP	2-6V	-40-85°C
19250	HD74HC138P	RENESAS	1-of-8 Decoder/Demultiplexer	DIP/16P		
680	HD74HC139P	RENESAS	Dual 3-to-8 line Decoder(Dual 2-to-4 Line Decoder)	16P/DIP	2-6V	-40-85°C
681	HD74HC147P	HITACHI	日立_10-to-4 line Priority Encoder	16P/DIP	2-6V	-40-85°C
19257	HD74HC14D	HITACHI	HEX SCHMITT-TRIGGER INVERTERS	14P/SOIC	2-6V	-40-85°C
4304	HD74HC14P	HITACHI	Hex Inverter Schmitt Trigger	14P/DIP	2-6V	-40-85°C
39284	HD74HC14P	RENESAS	Hex Schmitt-trigger Inverters	14P/DIP	2-6V	-40-85°C
4312	HD74HC151P		8-input data selector/multiplexer, high-performance silicon-gate CMOS	16P/DIP	2-6V	-40-85°C
682	HD74HC153P	HITACHI	日立_Dual 4-Input Multiplexer	16P/DIP	2-5.5V	-40-85°C
683	HD74HC154P	HITACHI	日立_4-to-16 line Decoder(3" Lead)	24P/DIP	2-6V	-55-125°C
684	HD74HC155P	HITACHI	日立_Dual 2-to-4 line Decoders/Demultiplexers	16P/DIP	2-6V	-40-+85°C
685	HD74HC157P	HITACHI	日立_Quad 2-Input Multiplexer	16P/DIP	2-6V	-40-85°C
686	HD74HC158P	HITACHI	Quad. 2-to-1 line Data Selectors/Multiplexers with Inverted outputs	16P/DIP	2-6V	-55-125°C
687	HD74HC160P	HITACHI	Synchronous Decade Counter with Direct Clear	16P/DIP	2-6V	-40-85°C
688	HD74HC161P	HITACHI	Synchronous Binary Counter with Asynchronous Clear	16P/DIP	2-6V	-40-85°C



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699

上海: 86-21-64605107

上海: 100y-1@163.com