




74HC/HCT~逻辑IC系列

详细产品规格 - 请点击 cn.100y.com.tw

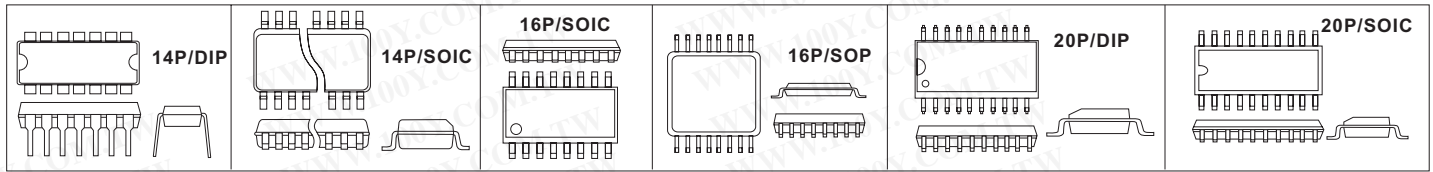

100Y 编号	厂商编号	制造厂商	说明	Pins/Package	Vcc(Supply voltage)	Operating Temp.
40890	SN74HC32D	T.I.	devices contain four independent 2-input OR gates.	SOIC	-0.5 V to 7 V	-40 C to 85 C
34572	SN74HC32N	T.I.	QUADRUPLE 2-INPUT POSITIVE-OR GATES	14P/DIP	2-6V	-40°C to 85°C
34568	SN74HC367N	T.I.	HEX BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS	16P/DIP	2-6V	-40°C to 85°C
22282	SN74HC373DWR	T.I.	OCTAL TRANSPARENT D-TYPE LATCHES WITH 3-STATE OUTPUTS	20P/DIP	-0.5-7 V	-65°C~150°C
19232	SN74HC373N	T.I.	OCTAL TRANSPARENT D-TYPE LATCHES WITH 3-STATE OUTPUTS	20P/DIP	2-6V	-55~125°C
19235	SN74HC374N	T.I.	OCTAL EDGE-TRIGGERED D-TYPE FLIP-FLOPS WITH 3-STATE OUTPUTS	DIP	2-6V	-40~85°C
44456	SN74HC377N	T.I.	OCTAL D-TYPE FLIP-FLOPS WITH CLOCK ENABLE	20P/DIP	-0.5~7V	-40~85°C
34565	SN74HC4040N	T.I.	12-BIT ASYNCHRONOUS BINARY COUNTERS	16P/DIP	2-6V	?40 C to 85 C
22292	SN74HC4046AM96	T.I.	High-Speed CMOS Logic Phase-Locked-Loop with VCO	16P/SOIC	5V	-55~125oC
22297	SN74HC4051MTC	T.I.	8-Channel Analog Multiplexer · Dual 4-Channel Analog Multiplexer · Triple 2-Channel Analog Multiplexer	16P/SSOP	-0.5-7.5V	-65°C~150°C
41738	SN74HC4060D	T.I.	14-Stage Asynchronous Binary Counters And Oscillators	16P/SOIC	2 V to 6 V	-40 °C to 85 °C
41737	SN74HC4060N	T.I.	14-Stage Asynchronous Binary Counters And Oscillators	DIP/16P	2 V to 6 V	-40 °C to 85 °C
43027	SN74HC4066DBR	T.I.	QUADRUPLE BILATERAL ANALOG SWITCH	SSOP	2-6V	-40 C to 85 C
43028	SN74HC4066PW	T.I.	QUADRUPLE BILATERAL ANALOG SWITCH	TSSOP-14	2-6V	-40 C to 85 C
43029	SN74HC4066PWR	T.I.	QUADRUPLE BILATERAL ANALOG SWITCH	TSSOP-14	2-6V	-40 C to 85 C
32120	SN74HC540N	T.I.	Octal Buffers and Line Drivers with 3-state outputs	20P/DIP	2-6V	-40~85°C
43030	SN74HC541DW	T.I.	OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS	SOIC-20	2-6V	-40 C to 85 C
22307	SN74HC541N	T.I.	OCTAL BUFFERS AND LINE DRIVERS WITH 3-STATE OUTPUTS	20P/DIP	2-6V	-65°C~150°C
4490	SN74HC573	T.I.	3-STATE Octal D-Type Latch	20P/DIP	2-6V	-40~85°C
19241	SN74HC573ADW	T.I.	OCTAL TRANSPARENT D-TYPE LATCHES WITH 3-STATE OUTPUTS	20P/SOP	2-6V	-40~85°C
34561	SN74HC573AN	T.I.	OCTAL TRANSPARENT D-TYPE LATCHES WITH 3-STATE OUTPUTS	20P/DIP	2-6V	-40°C to 85°C
22312	SN74HC574N	T.I.	Octal D-type flip-flop; positive edge-trigger; 3-state	20P/DIP	5V	-40~85°C
19240	SN74HC595N	T.I.	逻辑 IC	DIP		-45~85°C
43033	SN74HC595N	T.I.	8-BIT SHIFT REGISTERS WITH 3-STATE OUTPUT REGISTERS	16P/DIP	2-6V	-40 C to 85 C
43035	SN74HC682DWR	T.I.	8-BIT MAGNITUDE COMPARATORS	SOIC-20	2 V to 6 V	-40 C to 85 C
17742	SN74HC688D	T.I.	8-bit Mag. Comparator	20P/SOIC	2-6V	-40~85°C
14764	SN74HC688DW	T.I.	8-Bit Magnitude Comparator (Equality Detector)	20P/SOIC(300mil)	2-6V	-40~85°C
29306	SN74HC688N	T.I.	8-bit Mag. Comparator	20P/DIP	2-6V	-40~85°C
28794	SN74HC74N	T.I.	Dual D Flip Flop with Preset and Clear	14P/DIP	2-6V	-40~125°C
11501	SN74HC85D	T.I.	High Speed CMOS Logic 4-Bit Magnitude Comparator	14P/SOIC (窄体)	2-6V	-40~85°C
19258	SN74HC86N	T.I.	QUADRUPLE 2-INPUT EXCLUSIVE-OR GATES	14P/DIP	2-6V	-40~85°C
43036	SN74HCT00PWR	T.I.	QUADRUPLE 2-INPUT POSITIVE-NAND GATES	TSSOP-14	4.5 V to 5.5 V	-40 C to 85 C
1014	SN74HCT02D	T.I.	Quad 2-input NOR gate High-performance silicon-gate CMOS	14P/SOIC	2-6V	-40~85°C
29682	SN74HCT04N	T.I.	Hex Inverter	14P/PDIP	-0.5 ~7.0V	-40°C~85°C
1015	SN74HCT08D	T.I.	Quad 2-input AND gate. High-performance silicon-gate CMOS.	14P/SOIC	4.5~5.5V	-40~125°C
43040	SN74HCT08D	T.I.	QUADRUPLE 2-INPUT POSITIVE-AND GATES	SOIC-14	4.5 V to 5.5 V	-40 C to 85 C
43042	SN74HCT08DR	T.I.	QUADRUPLE 2-INPUT POSITIVE-AND GATES	SOIC-14	4.5 V to 5.5 V	-40 C to 85 C
10251	SN74HCT126D	T.I.	Quad buffer/line driver; 3-state	14P/SOIC	2-6V	-40~85°C
1020	SN74HCT138D	T.I.	High-Speed CMOS Logic 3- to 8-Line Decoder/Demultiplexer Inverting and Non-Inverting	16P/SOIC	4.5~8.5V	-40~85°C
43043	SN74HCT138D	T.I.	3-Line To 8-Line Decoders/Demultiplexers	SOIC-16	4.5 V to 5.5 V	-40 C to 85 C
1016	SN74HCT32DR	T.I.	Quad 2-input OR gate	14P/SOIC	4.5~5.5V	-40~85°C
1028	SN74HCT373D	T.I.	OCTAL TRANSPARENT D-TYPE LATCHES WITH 3-STATE OUTPUTS	20P/SOIC(300mil)	4.5~5.5V	-40~85°C
1029	SN74HCT374DW	T.I.	OCTAL EDGE-TRIGGERED D-TYPE FLIP-FLOPS WITH 3-STATE OUTPUTS	20P/SOIC(300mil)	4.5~5.5V	-40~85°C
17416	SN74HCT374DWR	T.I.	OCTAL EDGE-TRIGGERED D-TYPE FLIP-FLOPS WITH 3-STATE OUTPUT	20P/SOIC	4.5~5.5V	-40~85°C
43044	SN74HCT374DWR	T.I.	Octal D-type Edge-Triggered Flip-Flops With 3-State Outputs	SOIC ?20	4.5 to 5.5V	-40 C to 85 C
1030	SN74HCT573D	T.I.	TRI-STATE Octal D-Type Latch	20P/SOIC(300mil)	4.5~5.5V	-40~85°C
43045	SN74HCT74DR	T.I.	Dual D-Type Positive-Edge-Triggered Flip-Flops With Clear and Preset	SOIC-14	4.5 V to 5.5 V	-40 C to 85 C
29688	SN74HCT74N	T.I.	Dual D-type flip-flop with set andreset; positive-edge trigger	14P/DIP	-0.5~7V	-40~85°C
43046	SN74HCT74PWR	T.I.	Dual D-Type Positive-Edge-Triggered Flip-Flops With Clear and Preset	TSSOP-14	4.5 V to 5.5 V	-40 C to 85 C
43058	SN74HCU04DR	T.I.	Hex Inverters	SOIC-14	2 V to 6 V	-40 °C to 85 °C
20635	SN74HCU04N	T.I.	Hex Inverter	14P/DIP	2-6V	-40~85°C
36456	SN74LVT244BDW	T.I.	3.3-V ABT OCTAL BUFFERS/DRIVERS WITH 3-STATE OUTPUTS	24p/sop	2.7V~3.6V	-40~85 °C
665	TC74AC20P	TOSHIBA	Dual 4-input NAND gate	14P/DIP	2-6V	-55~125°C
33829	TC74HC04AP	TOSHIBA	HEX INVERTER	DIL14	2-6V	-40~85°C
33825	TC74HC07AP	TOSHIBA	HEX BUFFER(OPEN DRAIN)	DIL14	2-6V	-40~85°C
33820	TC74HC123AP	TOSHIBA	DUAL RETRIGGERABLE MONOSTABLE MULTIVIBRATOR	DIL16	2-6V	-40~85°C
33811	TC74HC132AP	TOSHIBA	QUAD 2-INPUT SCHMITT NAND GATE	DIL14	2-6V	-40~85°C
33808	TC74HC138AP	TOSHIBA	3-TO-8 LINE DECODER	DIL16	2-6V	-40~85°C
29592	TC74HC14AF	TOSHIBA	TOSHIBA_74HC/HCT~逻辑 IC 系列	14P/SOP-300-1.27		-40~85



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699

上海: 86-21-64605107

上海: 100y-1@163.com