


逻辑IC

其它74~系列IC

详细产品规格 - 请点击 cn.100y.com.tw

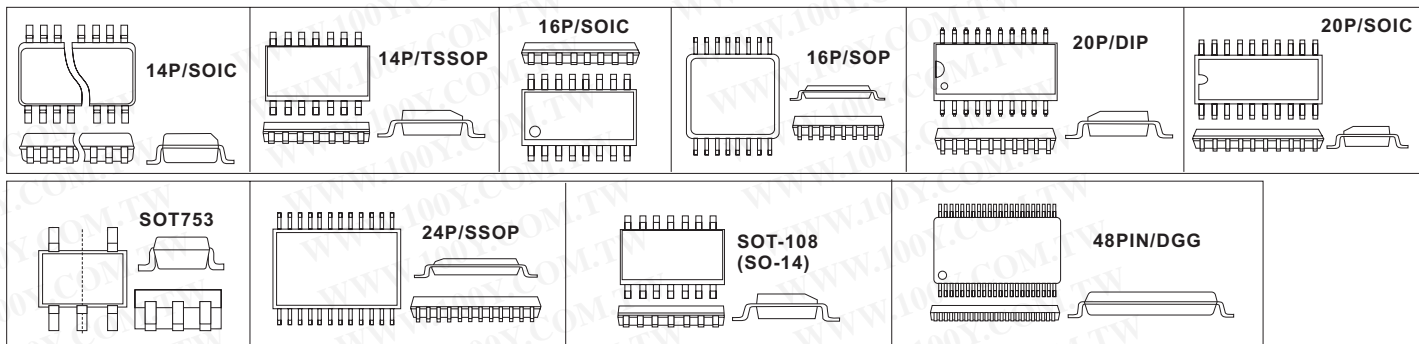

100Y 编号	厂商编号	制造厂商	说明	Pins/Package	Vcc(Supply voltage)	Operating Temp
42797	74ABT240D	PHILIPS	Octal inverting buffer	20P/SOP	5V	-40°C to +85°C
35641	74ABT244D	PHILIPS	Octal buffer/line driver (3-State)	20P/SOP	4.5-5.5V	-40°C to +85°C
35644	74ABT244N	PHILIPS	Octal buffer/line driver (3-State)	20P/DIP	4.5-5.5V	-40°C to +85°C
35647	74ABT244PW	PHILIPS	Octal buffer/line driver (3-State)	20P/TSSOP	4.5-5.5V	-40°C to +85°C
34501	74ALVC164245DG	PHILIPS	16-bit dual supply translating transceiver; 3-state	TSSOP48	2.5/3.3V	
17012	74LXC04M	Fairchild	Low Voltage Hex Inverter with 5V Tolerant Inputs	14P/SOIC	2-3.6V	-40-85°C
35925	74LXC04MTC	Fairchild	Low Voltage Hex Inverter with 5V Tolerant Inputs	14P/TSSOP	2-3.6V	-40-85°C
19093	74LXC244WM	Fairchild	Low Voltage Buffer/Line Driver with 5V Tolerant Inputs and Outputs	20P/SOIC	5V	-65 to +150°C
35927	74LXC245MSAX	Fairchild	Low Voltage Bidirectional Transceiver with 5V Tolerant Inputs and Outputs	20P/SSOP	2-3.6V	-40-85°C
30153	74LXC245MTC	Fairchild	Low Voltage Bidirectional Transceiver with 5V Tolerant Inputs and Outputs	20P/TSSOP	2-3.6V	-40-85°C
49758	74LXC245MTR	ST(SGS)	ST_其它 74~系列 IC	SOP-20P	2.0V to 3.6V	-55-125°C
19094	74LXC245WM	Fairchild	Low Voltage Bidirectional Transceiver with 5V Tolerant Inputs and Outputs	20P/SOIC	2-3.6V	-40-85°C
19095	74LXC373WM	Fairchild	Low Voltage Octal Transparent Latch with 5V Tolerant Inputs and Outputs	20P/SOIC	5V	-65 to +150°C
17011	74LVC04D	PHILIPS	Hex Inverter	14P/SOIC	1-5.5V	-40-85°C
29053	74LVC00AD	PHILIPS	逻辑 IC	14P/SOP		-40-85°C
20211	74LVC04AD	PHILIPS	Hex inverter	14P/SOIC	1.2-3.6V	-40 to +125 °C
35440	74LVC04APW	PHILIPS	Hex inverter	14P/TSSOP	1.2-3.6V	-40°C to +85°C
43047	74LVC08AD	PHILIPS	Quad 2-input AND gate	14P/SOIC	1.2V to 3.6V	-40-125°C
40702	74LVC08APW	PHILIPS	Quadruple 2-Input AND Gate	14P/TSSOP	1.2V~3.6V	-40-85°C
35436	74LVC125AD	PHILIPS	Quad buffer/line driver with 5-volt tolerant inputs/outputs 3-State	14P/SO	2.7-3.6V	-40°C to +125°C
35432	74LVC125APW	PHILIPS	Quad buffer/line driver with 5-volt tolerant inputs/outputs 3-State	14P/TSSOP	2.7-3.6V	-40°C to +125°C
48901	74LVC138AD	T.I.	TI_16-Pin Plastic SO	SO-16	3.3 V	-40°C to +85°C
41681	74LVC138APW	PHILIPS	Quadruple 2-Input AND Gate	16P/TSSOP	1.2-3.6V	-40-85°C
17070	74LVC157	PHILIPS	Quad 2-input multiplexer	16P/SOIC(SOT109-1)	2.7-3.6V	-40-125°C
41971	74LVC157AD	PHILIPS	Quad 2-input multiplexer	SO16	2.7-3.6V	-40-125°C
28952	74LVC162244APV	IDT	逻辑 IC	48P/TSSOP	3.6V	-40-125 °C
47657	74LVC1G08GV	PHILIPS	飞利浦_3.3V PicoGate 2-Input AND Gate	5P/SOT-753	1.65-5.5V	-40°C ~ 125°C
19480	74LVC244AD	PHILIPS	tolerant inputs/outputs (3-state)	20P/SO	2.7 to 3.6V	-40 to +125 °C
47594	74LVC244ADB	PHILIPS	飞利浦_tolerant inputs/outputs (3-state)	20P/SSOP	2.7 to 3.6V	-40 to +125 °C
27828	74LVC244APW	PHILIPS	tolerant inputs/outputs (3-state)	20P/TSSOP	2.7 to 3.6V	-40 to +125 °C
17069	74LVC245AD	PHILIPS	Octal bus transceiver with direction pin; 3-state	20P/SOIC	2.7-3.6V	-40-85°C
19096	74LVC273	Panasonic	Octal D-type flip-flop with reset; positive-edge trigger	20P-SOIC	2.7-3.6V	-40-85°C
19482	74LVC273D	PHILIPS	Octal D-type flip-flop with reset; positive-edge trigger	20P	2.7-3.6V	-40-85°C
43567	74LVC32AD	PHILIPS	Quad 2-input OR gate	14P/SOIC	1.2-3.6V	-40-125°C
46043	74LVC32APW	PHILIPS	Quad 2-input OR gate	14P/TSSOP	1.2-3.6V	-40-125°C
39115	74LVC373AD	PHILIPS	Octal D-type transparent latch	20-SO	5	-40-85°C
39206	74LVC4245AD	PHILIPS	Octal dual supply translating transceiver	24P/SOIC	1.5-5.5V	-40 °C to +125 °C
28924	74LVC4245APW	PHILIPS	Octal dual supply translating transceiver	24P/TSSOP	1.5-5.5V	-40-85 °C
28024	74LVC4254ADB	PHILIPS	Octal dual supply translating transceiver; 3-state	SSOP24	1.5-5.5V	-40 to +85 °C
33951	74LVC541APW	PHILIPS	Octal buffer/line driver with 5-volt tolerant	20P/TSSOP		-40°C to +85°C
40194	74LVC573D	PHILIPS	Octal D-type transparent latch (3-state)	20P/SOP	1.2 V to 3.6 V	-40-85°C
35415	74LVCH162245ADGG	PHILIPS	16-bit bus transceiver with direction pin; 30ohm series termination resistors; 5V Input/Outputs tolerant 3-State	TSSOP48	2.7-3.6V	-40 to +125 °C
35413	74LVCH162245ADL	PHILIPS	16-bit bus transceiver with direction pin; 30ohm series termination resistors; 5V Input/Outputs tolerant 3-State	SSOP48	2.7-3.6V	-40 to +125 °C
35412	74LVCH16245ADGG	PHILIPS	16-bit bus transceiver with direction pin; 5V tolerant 3-State	TSSOP48	2.7-3.6V	-40 to +125 °C
35411	74LVCH16245ADL	PHILIPS	16-bit bus transceiver with direction pin; 5V tolerant 3-State	SSOP48	2.7-3.6V	-40 to +125 °C
35416	74LVCH244AD	PHILIPS	Octal buffer/line driver with 5-volt tolerant inputs/outputs 3-State	20P/SO	2.7-3.6V	-40°C to +85°C
22399	74LVT125D	PHILIPS	3.3V Quad buffer (3-State)	14P/SO	-0.5 -4.6V	-40°C-85°C
48134	74LVT241PW	PHILIPS	飞利浦_3.3V Octal buffer/line driver (3-State)	20P/TSSOP	2.7-3.6V	40°C to +85°C
35405	74LVT244AD	PHILIPS	3.3V Octal buffer/line driver (3-State)	20P/TSSOP	2.7-3.6V	40°C to +85°C
35408	74LVT244AD	PHILIPS	3.3V Octal buffer/line driver (3-State)	20P/SOP	2.7-3.6V	-40°C to +85°C
39621	74LVT244APW	PHILIPS	3.3V Octal buffer/line driver (3-State)	20P/TSSOP	2.7-3.6V	40°C to +85°C
35402	74LVT244WM	FUJITSU	Low Voltage Octal Buffer/Line Driver with 3-STATE Outputs [FAIRCHILD]	20P/SOIC	2.7-3.6V	740°C to +85°C
35399	74LVT245WM	Fairchild	Low Voltage Octal Bidirectional Transceiver with 3-STATE Inputs/Outputs	20P/SOIC	2.7-3.6V	740°C to +85°C
35409	74LVTH244APW	PHILIPS	3.3V Octal buffer/line driver (3-State)	20P/TSSOP	2.7-3.6V	-40°C to +85°C
33841	74LVX08MTC	Fairchild	Low Voltage Quad 2-Input AND Gate	14P/TSSOP	2-3.6V	-40-85°C



服务专线: 台湾: 886-3-5753170

传 真: 台湾: 886-3-5753172

E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787

深圳: 86-755-83640655

深圳: 100y@163.com

上海: 86-21-34970699

上海: 86-21-64605107

上海: 100y-1@163.com