



讯号转换控制IC


电压转频率和频率转电压IC

详细产品规格 - 请点击 cn.100y.com.tw

100Y 编号	厂商编号	制造厂商	说明	Pins/Package	Vcc	Icc(mA)	Temp Range
41951	DS1869S-10	DALLAS	3V Dallastat™ Electronic Digital Rheostat		3V		(-40°C to +85°C)
29729	KA331	Fairchild	Fairchild PRECISION Voltage-to-Frequency Converters	8P/DIP	40V	8mA	0~+70°C
7511	LM2907N	N.S	Frequency to voltage Converter	14P/DIP	28V	25mA	-40°C to +85°C
27006	LM2907N-8	N.S	Frequency to voltage Converter	8P/DIP	28V	25mA	-40°C to +85°C
7513	LM2917N-14	N.S	Frequency to voltage Converter	14P/DIP	28V	25mA	-40°C to +85°C
6843	LM2917N-8	N.S	Frequency to voltage converter	8P/DIP	28V	25mA	-40°C to +85°C
6606	LM331N	N.S	Precis. Volt to freq. Converter(150ppm/°C)(PRECISION Voltage-to-Frequency Converters)	8P/DIP	40V	8mA	0°C ~ +70°C
32581	TC9400COD	TelCom	Voltage-to-Frequency/Frequency-to-Voltage Converters	14P/SOIC			0°C to +70°C
17193	TC9400CPD	MICRO-CHIP	Voltage-to-Frequency/Frequency-to-Voltage	14P/DIP	+8V to +15V	6mA	0°C to +70°C
33052	VFC32BM	BB	Voltage-to-Frequency and Frequency-to-Voltage Converter	TO-100 Metal	22V		-25°C to +85°C
33051	VFC32KP	BB	Voltage-to-Frequency and Frequency-to-Voltage Converter	14P/PDIP	22V		0°C to 70°C
33055	VFC32KU	BB	Voltage-to-Frequency and Frequency-to-Voltage Converter	SO-14 SOIC	22V		0°C to +70°C
33054	VFC32SM	BB	Voltage-to-Frequency and Frequency-to-Voltage Converter	TO-100 Metal	22V		-55°C to +125°C

遥控(解码/编码)类IC

详细产品规格 - 请点击 cn.100y.com.tw

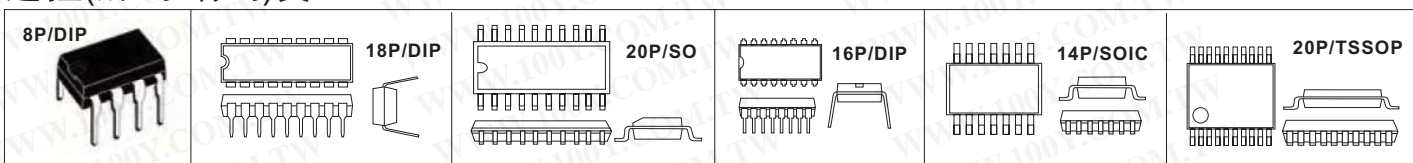

100Y 编号	厂商编号	制造厂商	说明	Pins-Package	Vcc	Operating Temperature	Storage Temperature
41532	ADG3308BRUZ	ADI	Low Voltage 1.15 V to 5.5 V, 8-Channel, Bidirectional, Logic Level Translator	20P/TSSOP	1.15-5.5V	-40°C to +85°C	25°C
42097	MAX1617MEE	MAXIM	Remote/Local Temperature Sensor	16 QSOP	+3V to +5.5V	-55°C to +125°C	-65°C to +165°C
6869	MC145026P	MOTOROLA	CMOS Remote control encoder(Encoder and Decoder Pairs CMOS)	16P/DIP	2.5V-18V	-40 to +85°C	-65 to +150°C
6870	MC145027P	MOTOROLA	CMOS Remote control decoder (5-Bit)(Encoder and Decoder Pairs CMOS)	16-DIP	4.5-18V	-40 to +85°C	-65 to +150°C
6871	MC145028P	MOTOROLA	CMOS Remote control decoder (9-Bit)(Encoder and Decoder Pairs CMOS)	16-DIP	4.5V-18V	-40 to + 85°C	-65 to +150°C
23369	MC3373P	MOTOROLA	遥控器电路 IC				
41378	MC74AC138D	MOTOROLA	This device is ideally suited for high-speed bipolar memory chip select address decoding.	16p/SOIC	2.0v/6.0v	-40°C / 85°C	25°C
46452	MCP2120-I/SL	MICRO-CHIP	解码/编码类 IC	SOIC-14	2.7-5.5V	-40-85°C	
27780	PT-2308	PTC	Headphone Driver	8P/DIP	8V	-45-85°C	-65-150°C
39243	PT2248	PTC	Infrared Remote Control Transmitter	16P/DIP	2.2 ~ 5.0 V	-40 ~ +85	-65~+150°C
32142	PT2249A	PTC	Infrared Remote Control Receiver	16P/DIP	2.3-5V	0 ~ +70°C	
22072	PT2262	PTC	Remote control Encoder	18P-DIP	4-15V	-20-70°C	-40-125°C
19462	PT2262-IRS	PTC	Remote control Encoder	20P-SO	4-15V	-20-70°C	-40-125°C
19593	PT2262-S18	PTC	Remote control Encoder	18P-SO	4-15V	-20-70°C	-40-125°C
40115	PT2268	PTC	Remote Control Encoder	DIP-16P	2.2 ~ 5.0 Volts		
41322	PT2272	PTC	Remote control Encoder	18P-DIP	4-15V	-20-70°C	-40-125°C
21911	PT2272-L4	PTC	Remote control Encoder	18P-DIP	4-15V	-20-70°C	-40-125°C
21912	PT2272-M4	PTC	Remote control Encoder	18P-DIP	4-15V	-20-70°C	-40-125°C
19463	PT2272A-L2S	PTC	Remote Control Decoder	20P-SO	4-15V		
48533	TC9148P	TOSHIBA	遥控(解码/编码)类 IC	DIP-16P	6V		
11395	TDA7284	ST(SGS)	Record/Playback Circuit With ALC	14-DIP	3V-12V	-20 TO 70°C	-40 to +150°C
17365	TT6061A		OFF-MIN-MOOD-MID-MAX-OFF	DIP-8P	6.8V	0-80	-20-120

音乐晶体&语音晶片

详细产品规格 - 请点击 cn.100y.com.tw

100Y 编号	厂商编号	制造厂商	说明	Pins/Packing	SONG NAME	Vcc	存储温度
21936	A04-0014M20A		语音 IC Voice-20A	18P/DIP			
21925	A22-0001		20 秒分段即时录放语音 IC(Dies 包装)	Dies			20 Sec
21926	A22-0001M		0 秒分段即时录放语音 IC 材料包				20 Sec
21927	A22-0002		90 秒分段即时录放语音 IC 材料包				90 秒
21929	A22-0002M						
21931	A22-0009	WINBOND	ISD4004-08MP 8 分钟分段即时录放语音 IC	28P/DIP			8 分钟
21934	A22-0010	WINBOND	ISD4004-12MP 12 分钟分段即时录放语音 IC	28P/DIP			12 分钟
21928	A22-0011	WINBOND	ISD4004-16MP 16 分钟分段即时录放语音 IC	DIP			16 分钟
21924	A22-0012		20 秒分段即时录放语音 IC(含控制电路)				20 秒
21933	ISD 4004-12MP	WINBOND	16 分钟分段语音即时录放 IC				
10248	UM66T05L	UTC	Home Sweet Home 音乐晶体(LINEAR INTEGRATED CIRCUIT)	3P/TO-92	Home sweet home	1.5 ~ 4.5V	-55 ~ +125°C
10249	UM66T19L	UTC	For Elise 音乐晶体(LINEAR INTEGRATED CIRCUIT)	3P/TO-92	For Alice	1.5 ~ 4.5V	-55 ~ +125°C



服务专线: 台湾: 886-3-5753170

深圳: 86-755-83298787

上海: 86-21-34970699

40-08

传 真: 台湾: 886-3-5753172

深圳: 86-755-83640655

上海: 86-21-64605107

E-mail: 台湾: sale@100y.com.tw

深圳: 100y@163.com

上海: 100y-1@163.com