


晶体+IC座/夹

SOP/SSOP/TSOP Burn-In/测试座

详细产品规格 - 请点击 cn.100y.com.tw

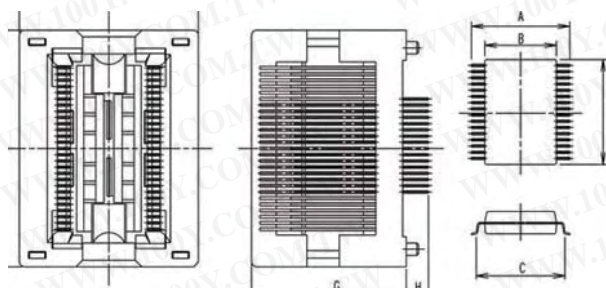


特点:

- 接点电阻: Initial 30m or 50m (At 10mA)
- 最大电压: AC700V RMS (for 1 minute)
* Below 0.5mm Pitch
AC500V RMS (for 1 minute)
- 绝缘电阻: 1,000Mor higher (At DC 500V)
- 电流规定值: 1A
- 终端反拉力: 0.5kg (1 minute)
- 绝缘体: Min. 10,000 times (Mechanical)
- 操作温度范围: -60C ~ +150C

材质:

外壳: PEI, PES /
接点: BeCu, SnNiCu, Au plating (Ni-base)

100Y 编号	厂商编号	制造厂商	说明	Pins/Pitch	耐温℃	适用 IC 包装
14653	OTS-28-0.635-02	ENPLAS	SOP 28Pins Open Top Burn-in Socket	28P/0.635mm	-65℃ ~ +150℃	SSOP
15917	OTS-28-0.65-01	ENPLAS	SSOP 28Pins Open Top Burn-in Socket	28P/0.65mm	-65℃ ~ +150℃	SSOP
39275	OTS-28-1.27-04	ENPLAS	SOP 28Pins Open Top Burn-in Socket	28P/1.27mm	-65℃ ~ +150℃	SSOP
49808	OTS-8(16)-1.27-03	ENPLAS	ENPLAS_IC 用脚座	8P/1.27mm	-60℃ ~ +150℃	SOP-8P
45298	OTS-8(28)-0.65-01	ENPLAS	IC 用脚座	8P/0.65		TSSOP

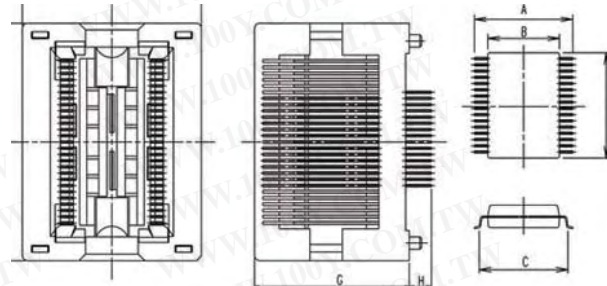


特点:

- 接点电阻: Initial 30m or 50m (At 10mA)
- 最大电压: AC700V RMS (for 1 minute)
* Below 0.5mm Pitch
AC500V RMS (for 1 minute)
- 绝缘电阻: 1,000Mor higher (At DC 500V)
- 电流规定值: 1A
- 终端反拉力: 0.5kg (1 minute)
- 绝缘体: Min. 10,000 times (Mechanical)
- 操作温度范围: -60C ~ +150C

材质:

外壳: PEI, PES /
接点: BeCu, SnNiCu, Au plating (Ni-base)

100Y 编号	厂商编号	制造厂商	说明	Pins/Pitch	耐温℃	适用 IC 包装
49478	OTS-32-0.5-01	ENPLAS	TSOP 32Pins Open Top Burn-in Socket	32P / 0.5mm	-60℃ ~ +150℃	TSOP
18792	OTS-32-0.5-01	ENPLAS	TSOP 32Pins Open Top Burn-in Socket	32P / 0.5mm	-60℃ ~ +150℃	TSOP
39227	OTS-34-0.65-01	ENPLAS	Open Top Burn-in Socket	34Pins/0.65mm	-60℃ ~ +150℃	SSOP
11654	OTS-44-0.8-09	ENPLAS	TSOP 44Pins Open Top Burn-in Socket	44Pins/0.8mm	-65℃ ~ +150℃	TSOP
22639	OTS-48-0.5-01	ENPLAS	OPEN TOP TYPE Burn-in SOCKETS	48P/0.5Pitch	-60-150℃	TSOP
22253	OTS-56-0.5-01	ENPLAS	Open Top Burn-in Socket	56Pins/0.5mm	-65℃ ~ +150℃	TSOP
45298	OTS-8(28)-0.65-01	ENPLAS	IC 用脚座	8P/0.65		TSSOP

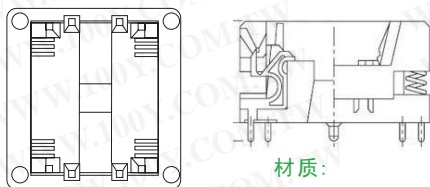

特点:

- 接点电阻: Initial 30m or 50m (At 10mA)
- 最大电压: AC700V RMS (for 1 minute)
* Below 0.5mm Pitch
AC500V RMS (for 1 minute)
- 绝缘电阻: 1,000Mor higher (At DC 500V)
- 电流规定值: 1A
- 终端反拉力: 0.5kg (1 minute)
- 绝缘体: Min. 10,000 times (Mechanical)
- 操作温度范围: -65℃ ~ +150℃

材质:

外壳: PEI, PES /
接点: BeCu, SnNiCu, Au plating (Ni-base)

100Y 编号	厂商编号	制造厂商	说明	Pins/Pitch	耐温℃	适用 IC 包装
49820	OTS-86-0.5-04	ENPLAS	Open Top Type Socket-IC/TSOP	86P/0.5mm	-65℃ ~ +150℃	TSOP



100Y 编号	厂商编号	说明	Pins/Pitch
33659	PCB026SOT	SOT-26 PCB 转接座	26P

cn.100y.com.tw

胜特力电子有限公司



服务专线: 台湾: 886-3-5753170
传 真: 台湾: 886-3-5753172
E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
深圳: 86-755-83640655
深圳: 100y@163.com

上海: 86-21-34970699
上海: 86-21-64605107
上海: 100y-1@163.com