




晶体+IC座/夹

QFP/FPQ Burn-In/测试座

详细产品规格 - 请点击 cn.100y.com.tw



IC51-1284-1433



材质:
Body: PEI, PES /PSF
接点: 镀铜 (BeCu)
镀层: 镍金



规格:
接点电阻: 30MΩ max. at 10mA/20mV (Initial)
绝缘电阻: 1,000 MΩ minimum at 500VDC
电介质耐压: 700VAC for 1 minute
操作温度: PES/PEI -55°C ~ +170°C
PSF -40°C ~ +150°C

PART NUMBER	NO. OF LEADS	BODY SIZE	PITCH	MATCHING PACKAGE SIZE						NOTES
				A	B	C	D	E	F	
IC51-1004-809	100	14*14	0.5	16.0	16.0	14.0	14.0	15.2	15.2	Lidless IC201-1004-008
IC51-0644-807	64	10*10	0.5	12.0	12.0	10.0	10.0	11.3	11.3	FB lidless IC201-0644-003
IC51-1204-1812	120	14*14	0.4	16.0	16.0	14.0	14.0	15.2	15.2	Floating Base
IC51-1284-1433	128	14*20	0.5	16.0	22.0	14.0	20.0	15.0	21.0	Floating Base
IC51-1284-1433-10	128	14*20	0.5	17.2	23.2	14.0	20.0	16.4	22.4	Floating Base
IC51-1444-1354-7	144	20*20	0.5	22.0	22.0	22.0	20.0	20.0	21.3	Floating Base/TQFP
IC51-1497-KS11444	120	28*28	0.8	31.9	31.9	28.0	28.0	30.5	30.5	

100Y 编号	厂商编号	制造厂商	说明	Pins/Pitch	耐温 °C	适用 IC 包装
39269	IC51-0242-270-1	YAMAICHI	24P QFP 转接座	24P/0.5		QFP
39270	IC51-0242-270-3	YAMAICHI	24P QFP 转接座	24P/0.8		QFP
14630	IC51-0324-1498	YAMAICHI	32P QFP 转接座	32P		
39267	IC51-0324-1498	YAMAICHI	32P QFP 转接座	32P/0.8		QFP
39467	IC51-0644-807	YAMAICHI	64P 转换座(掀盖式)	64P		
14592	IC51-0644-820-5	YAMAICHI	64P 转换座(掀盖式)	64P		
39266	IC51-0644-824-X	YAMAICHI	64P QFP 转接座	64P/0.8		QFP
42825	IC51-1004-395	YAMAICHI	BumperQuadFlatPackage(BQFP)	100P/0.3	-55°C to +170°C	BQFP
40802	IC51-1004-809	YAMAICHI	100P 转换座(掀盖式)	100P/0.5mm	-55°C to +170°C	
49791	IC51-1004-814-1	YAMAICHI	100P 转换座(掀盖式)	100P/0.65mm	-55°C to +170°C	
29599	IC51-1004-814-2	YAMAICHI	100P 转换座(掀盖式)	100P/0.65mm	-55°C to +170°C	
27483	IC51-1004-814-2+QFP100PCB-E	YAMAICHI	10P 转换座(掀盖式)	100P/0.65mm	-55°C to +170°C	
39105	IC51-1124-1036	YAMAICHI	QFP-112P 转接座	112P/0.65mm	-55°C to +170°C	QFP
39106	IC51-1204-1812	YAMAICHI	QFP-120P 转接座	120P/0.40mm	-55°C to +170°C	QFP
39110	IC51-1284-1433	YAMAICHI	QFP-128P 转接座	128P/0.5mm	-55°C to +170°C	QFP
20072	IC51-1284-1433		PC 板 For : IC51-1284-1433-10 Socket	TSOP		128P/0.5mm
17558	IC51-1284-1433-10	YAMAICHI	YAMAICHI_QFP 转接座	128P/0.5mm	-40°C to +150°C	QFP_128P/0.5mm
39109	IC51-1284-844	YAMAICHI	QFP-128P 转接座	128P/0.8mm	-55°C to +170°C	QFP
15526	IC51-1444-1014-3	YAMAICHI	144P QFP 转接座	144P/0.65	-55°C-70°C	QFP
27516	IC51-1444-1354-7	YAMAICHI	144P QFP 转接座	144P/0.5		QFP
39107	IC51-1497-KS11444	YAMAICHI	QFP-120P 转接座	120P/0.8mm	-55°C to +170°C	QFP



材质:
Body: PEI, PES /
Contact: BeCu,
SnNiCu, Au plating
(Ni-base)

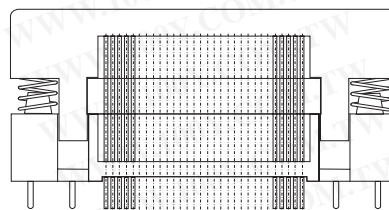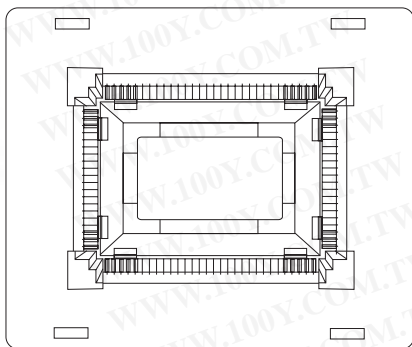

绝缘电阻: 1,000ΩM or higher
(At DC 500V)
电流规定值: 1A
绝缘体: Min. 10,000 times
(Mechanical)
操作温度范围: -60°C ~ +150°C

规格:
接点电阻: Initial 100Ωm (At 10mA)
最大电压: AC700V RMS (for 1 minute)
* Below 0.5mm Pitch
AC500V RMS (for 1 minute)
*气流较好
*垂直的驱动是理想的自动化。
*零插入功率
*Live bug. .



服务专线: 台湾: 886-3-5753170
传 真: 台湾: 886-3-5753172
E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
深圳: 86-755-83640655
深圳: 100y@163.com

上海: 86-21-34970699
上海: 86-21-64605107
上海: 100y-1@163.com