




电感, 静电容式近接感测元件 电感式近接感测元件


详细产品规格 - 请点击 cn.100y.com.tw

117487
邻近传感器
亚铁和非铁质金属传感器接近度


- 输入: +5VDC
- 输出: 0.4VDC 标准变化



9956-1400



功率: AC90~250V, 50/60Hz
最大负载: 180mA
回速: 15Hz
生产级别: IP67



9962-1535



9961-0200



M8x1
40
机架材料: 黄铜镀镍
螺帽: Cable 3x0.14
操作温度: -25°C... +70°C




9961-0300




9961-0500


操作电压: 10~30V DC
最大负载电流: 200mA
开关频率: 200 Hz
机架材料: 黄铜镀镍




9962-2330




9981-2000



M8 x 1
35
LED




9982-2265




M12x1
50

操作电压: 18~30VDC
最大负载电流: 120mA
开关频率: 1000Hz
机架材料: 黄铜镀镍


100Y 编号	厂商编号	制造厂商	说明	Size	Sensing Distance	Output
11606	117487		Sensor proximity of ferrous & non-ferrous metals			0.4Vdc level change Input:+5Vdc
16186	9956-1400	Pulsotroni	M30 AC 交流二线式(非埋入)	M30*60mm	15mm	N.O.
44502	9961-0200	Pulsotroni	M8 高负载/长型电感式接近开关		1.5mm	DC10~30V type-PNP Normally Open
23856	9961-0300	Pulsotroni	M8 高负载/长型电感式接近开关		1.5mm	DC10~30V type-NPN NO-output
14383	9961-0500		M8 高负载/长型电感式接近开关	M8*43mm	2mm	DC10~30V type-NPN NO-output
34214	9962-1535	Pulsotroni	Pulsotronic_接近开关	2.0mm		
49961	9962-2330	Pulsotroni	接近开关 9962-2330			
48717	9981-1002	Pulsotroni	接近开关	1.5mm		
39001	9981-2000	Pulsotroni	接近开关	1.5mm		
48716	9981-2010	Pulsotroni	接近开关	1.5mm		
29267	9982-2265	Pulsotroni	接近开关	4.0mm		



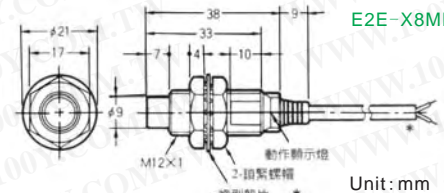

E2E-X8MD1

Unit: mm



项目	尺寸 隔离 型式	M8		M12		M18		M30	
		隔离	非隔离	隔离	非隔离	隔离	非隔离	隔离	非隔离
检测距离		E2E-X2D	E2E-X4MD	E2E-X3D	E2E-X8MD	E2E-7D	E2E-X14MD	E2E-X10D	E2E-X2MD
检测距离		2mm±10%	4mm 1 0%	3mm 1 0%	8mm 1 0%	7mm 1 0%	14mm 1 0%	10mm 1 0%	20mm 1 0%
设定距离		0~1.6mm	0~3.2mm	0~2.4mm	0~6.4mm	0~5.6mm	0~11.2mm	0~8mm	0~16mm
英茶距离		检测距离的15%以下,		检测距离的10%以下					
检测物体		磁性金属(非磁性金属的检测距离会降低)							
标准检测物体		铁 8 8 1 mm	铁 20 2 0 1 mm	铁 12 1 2 1 mm	铁 30 3 0 1 mm	铁 18 1 8 1 mm	铁 30 3 0 1 mm	铁 54 5 4 1 mm	
设定周波数		1.5kHz	1kHz		0.8kHz	0.5kHz	0.4kHz	0.1kHz	
电源电压(使用电压范围)		DC12~24V 涟波 (p-p) 10% 以下 (DC10~30V)							
漏失电流		0.8mA以下							
控制输出	开闭容量	3~100mA、诊断输出50mA (仅D1(5)S型)							
	残留电压	3V以下 (负载电流100mA、揽线长2mm时, 但, 仅M1J-T型为5V以下)							
显示灯		D1型: 动作显示(红色), 设定显示(绿色) D2型: 动作显示(红色)							
动作模态(检测物体接近时)		D1型: NO D2型: NC							

