



电感+抑制+滤波元件

RFI 抑制扼流圈





环境规定值

Rn102

详细产品规格 - 请点击 cn.100y.com.tw

最大操作电压	250V at 40°C
高潜在测试电压	
winding-to-winding at 25°C:	1500VAC, 1 minute, guaranteed 1500V, 50Hz, 2 sec, factory test
winding-to-housing at 25°C:	4000VAC, 1 minute, guaranteed
冲击电流在 10msec:	20 x Inominal at 25°C
功率操作频率:	DC to 1kHz at 40°C
操作温度:	-40°C to +125°C
储存温度:	-40°C to +125°C
Climatic class per IEC 68:	40/125/56
燃烧性:	UL94V0

100Y 编号	厂商编号	制造厂商	说明	Rated Vol.	Current (Amp)
49752	RN102-1/02	Schaffner	RN series-RFI 抑制扼流圈	250Vac	1A
49753	RN102-2/02	Schaffner	RN series-RFI 抑制扼流圈	250Vac	2A





环境规定值

Rn202

最大操作电压	250V at 40°C
高潜在测试电压	
winding-to-winding at 25°C:	1500VAC, 1 minute, guaranteed 1500V, 50Hz, 2 sec, factory test
winding-to-housing at 25°C:	4000VAC, 1 minute, guaranteed
冲击电流在 10msec:	20 x Inominal at 25°C
功率操作频率:	DC to 1kHz at 40°C
操作温度:	-40°C to +125°C
储存温度:	-40°C to +125°C
Climatic class per IEC 68:	40/125/56
燃烧性:	UL94V0

100Y 编号	厂商编号	制造厂商	说明	Rated Vol.	Current (Amp)
49748	RN202-1/02	Schaffner	RN series-RFI 抑制扼流圈	250Vac	1A
49749	RN202-2/02	Schaffner	RN series-RFI 抑制扼流圈	250Vac	2A



环境规定值


RN 212

最大操作电压	250V at 40°C
高潜在测试电压	
winding-to-winding at 25°C:	1500VAC, 1 minute, guaranteed 1500V, 50Hz, 2 sec, factory test
winding-to-housing at 25°C:	4000VAC, 1 minute, guaranteed
冲击电流在 10msec:	20 x Inominal at 25°C
功率操作频率:	DC to 1kHz at 40°C
操作温度:	-40°C to +125°C
储存温度:	-40°C to +125°C
Climatic class per IEC 68:	40/125/56
燃烧性:	UL94V0

100Y 编号	厂商编号	制造厂商	说明	Rated Vol.	Current (Amp)
49750	RN212-1.2/02	Schaffner	RN series-RFI 抑制扼流圈	250Vac	1.2A
49751	RN212-2/02	Schaffner	RN series-RFI 抑制扼流圈	250Vac	2A



PCB型EMI/EMC滤波元件

详细产品规格 - 请点击 cn.100y.com.tw



特点:

- ACF 系列是T类型EMC 过滤器合并纯铁芯片小珠和多层陶瓷芯片电容器。
- 外在结构整个地包括纯铁, 使这些零件达到优越稀释特征不论其极小直径。
- 由于他们可安装在边缘, ACF 系列是理想的为高密度电路配置。
- 可利用为流回焊接。

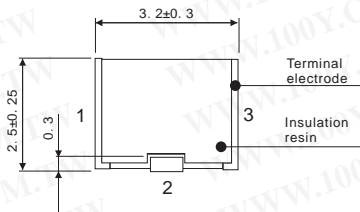

100Y 编号	厂商编号	制造厂商	说明	Rated Volt.	1-3 导线间电流量
41076	ACF321825-103-T	TDK			
41074	ACF321825-223-T	TDK			
41077	ACF321825-682-T	TDK	3-Terminal Filter for Signal Line and DC Power Line	20A	300mA



服务专线: 台湾: 886-3-5753170
 传 真: 台湾: 886-3-5753172
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
 深圳: 86-755-83640655
 深圳: 100y@163.com

上海: 86-21-34970699
 上海: 86-21-64605107
 上海: 100y-1@163.com