


开关元件

指拨开关(DIP & SMD)

详细产品规格 - 请点击 cn.100y.com.tw

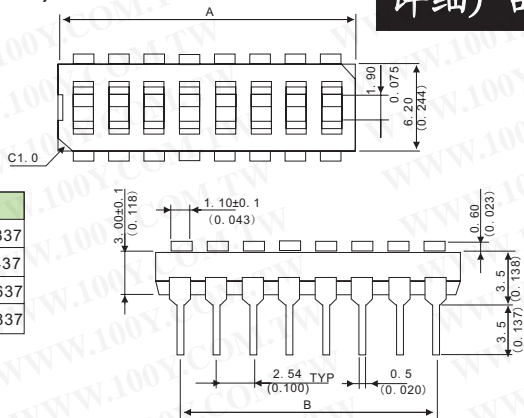


PROD NO.	NO. OF POS	DIMA	
RI/RIR-03	03	8.56	0.337
RI/RIR-04	04	11.1	0.437
RI/RIR-06	06	16.18	0.637
RI/RIR-08	08	21.26	0.837

冲击: 0.9mm
 操作温度: -25°C to +70°C
 存储温度: -40°C to +85°C

规格:

电气:
 电气寿命: 2000 operation cycles per switch 24VDC, 25mA.
 非开关规定值: 100mA, 50 VDC
 开关规定值: 25mA, 24VDC.
 接点阻抗: (a) 50mΩ max. at initial
 (b) 100mΩ max. after life test.
 绝缘电阻: 100MΩ min. (at 500VDC)
 电介质强度: 5pF max.
 电路: 单杆单投.
 机械
 机械寿命: 2000 operations per cycle switch
 操作力: 600gf max.

100Y 编号	厂商编号	说明	No. of pos.
17515	RI-04-H	IC 型-指拨开关	4-P
17516	RI-06-H	IC 型-指拨开关	6-P
17517	RI-08-H	IC 型-指拨开关	8-P
3594	RIR-03-S	IC 型-指拨开关	3-P
3595	RIR-04-S	IC 型-指拨开关	4-P
3596	RIR-06-S	IC 型-指拨开关	6-P
3597	RIR-08-S	IC 型-指拨开关	8-P


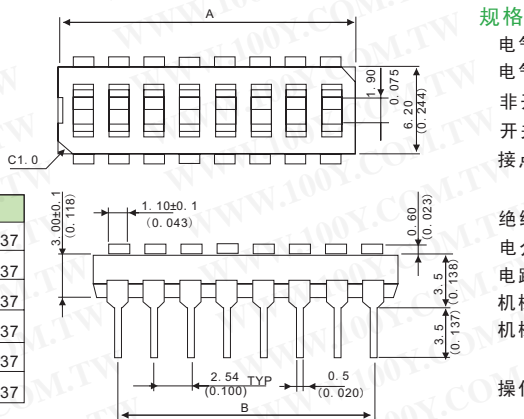


PROD NO.	NO. OF POS	DIMA	
RM/RMR-04	04	11.1	0.437
RM/RMR-05	05	13.64	0.537
RM/RMR-06	06	16.18	0.637
RM/RMR-07	07	18.72	0.737
RM/RMR-08	08	21.26	0.837
RM/RMR-10	10	26.34	1.037

规格:

电气:
 电气寿命: 2000 operation cycles per switch 24VDC, 25mA.
 非开关规定值: 100mA, 50 VDC
 开关规定值: 25mA, 24VDC.
 接点阻抗: (a) 50mΩ max. at initial
 (b) 100mΩ max. after life test.
 绝缘电阻: 100MΩ min. (at 500VDC)
 电介质强度: 5pF max.
 电路: 单杆单投.
 机械
 机械寿命: 2000 operations per cycle switch
 冲击: 0.9mm
 操作温度: -25°C to +70°C
 存储温度: -40°C to +85°C
 操作力: 600gf max.

100Y 编号	厂商编号	制造厂商	说明	No. of pos.
17248	RM-04	RESON	SURFACE MOUNTING TYPE DIP SWITCH	4P
18694	RM-05	RESON	SURFACE MOUNTING TYPE DIP SWITCH	5P
17249	RM-06	RESON	SURFACE MOUNTING TYPE DIP SWITCH	6P
17250	RM-07	RESON	SURFACE MOUNTING TYPE DIP SWITCH	7P
17251	RM-08	RESON	SURFACE MOUNTING TYPE DIP SWITCH	8P
17252	RM-10	RESON	SURFACE MOUNTING TYPE DIP SWITCH	10P

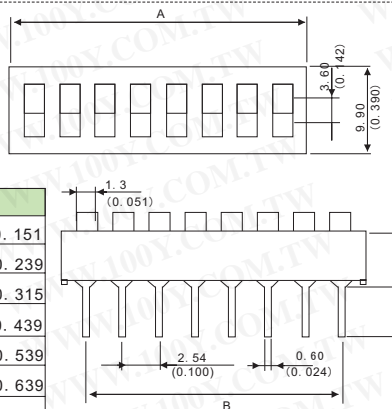

PROD NO.	NO. OF POS	DIMA	
RSR/RS-01	01	3.84	0.151
RSR/RS-02	02	6.08	0.239
RSR/RS-03	03	8.92	0.315
RSR/RS-04	04	11.16	0.439
RSR/RS-05	05	13.70	0.539
RSR/RS-06	06	16.24	0.639
RSR/RS-07	07	19.08	0.751
RSR/RS-08	08	21.32	0.839
RSR/RS-09	09	24.16	0.951
RSR/RS-10	10	26.40	1.039
RSR/RS-12	12	31.48	1.239

规格:

电气:
 电气寿命: 2000 operation cycles per switch 24VDC, 25mA.
 非开关规定值: 100mA, 50 VDC
 开关规定值: 25mA, 24VDC.
 接点阻抗: (a) 50mΩ max. at initial
 (b) 100mΩ max. after life test.
 绝缘电阻: 100MΩ min. (at 500VDC)
 电介质强度: 5pF max.
 电路: 单杆单投.
 机械
 机械寿命: 2000 operations per cycle switch
 冲击: 2.0mm
 操作温度: -25°C to +70°C
 存储温度: -40°C to +85°C
 操作力: 800gf max.

100Y 编号	厂商编号	说明	No. of pos.
22095	RS-01-B	DIP 指拨开关	01-P
3599	RS-02-B	DIP 指拨开关	2-P
3598	RS-03-B	DIP 指拨开关	3-P
3600	RS-04-B	DIP 指拨开关	4-P



服务专线: 台湾: 886-3-5753170
 传 真: 台湾: 886-3-5753172
 E-mail: 台湾: sale@100y.com.tw

深圳: 86-755-83298787
 深圳: 86-755-83640655
 深圳: 100y@163.com

上海: 86-21-34970699
 上海: 86-21-64605107
 上海: 100y-1@163.com